



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO 26424
 Component
Front Differential
 Fluid
PETRO CANADA TRAXON E SYNTHETIC 75W-90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0116018	PCA0089388	PCA0074371
Sample Date		Client Info		07 Mar 2024	31 Jan 2023	25 May 2022
Machine Age	mls	Client Info		445614	425250	403289
Oil Age	mls	Client Info		445614	425250	403289
Filter Age	mls	Client Info		0	0	403289
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	370	▲ 581	▲ 527
Chromium	ppm	ASTM D5185m	>10	3	4	4
Nickel	ppm	ASTM D5185m	>10	12	9	8
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	3	<1
Lead	ppm	ASTM D5185m	>25	0	▲ 44	▲ 39
Copper	ppm	ASTM D5185m	>100	4	60	▲ 54
Tin	ppm	ASTM D5185m	>10	<1	3	3
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION






Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

Silicon	ppm	ASTM D5185m	>75	▲ 129	▲ 139	▲ 127
Potassium	ppm	ASTM D5185m	>20	8	7	3
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		17	5	7
Boron	ppm	ASTM D5185m	229	202	145	145
Barium	ppm	ASTM D5185m	<1	<1	0	0
Molybdenum	ppm	ASTM D5185m		<1	1	<1
Manganese	ppm	ASTM D5185m		8	13	12
Magnesium	ppm	ASTM D5185m	<1	4	4	<1
Calcium	ppm	ASTM D5185m		15	16	14
Phosphorus	ppm	ASTM D5185m	1355	1545	1345	1306
Zinc	ppm	ASTM D5185m		26	45	33
Sulfur	ppm	ASTM D5185m	22698	27374	24941	26417
Visc @ 40°C	cSt	ASTM D445	100.8	97.1	89.7	90.0

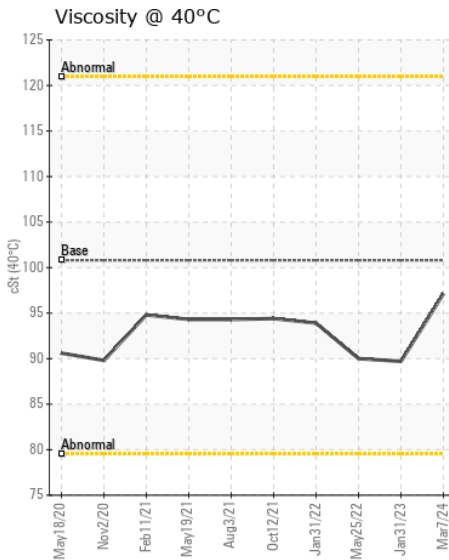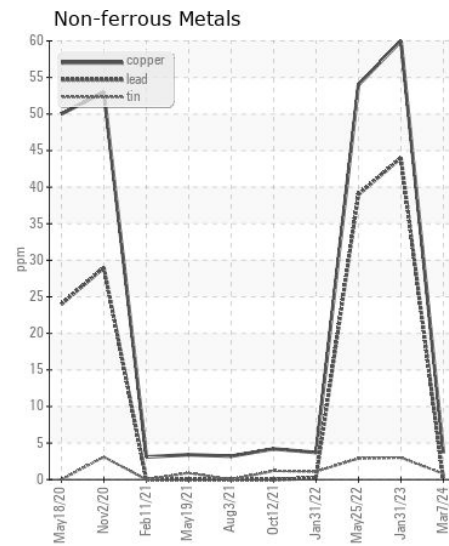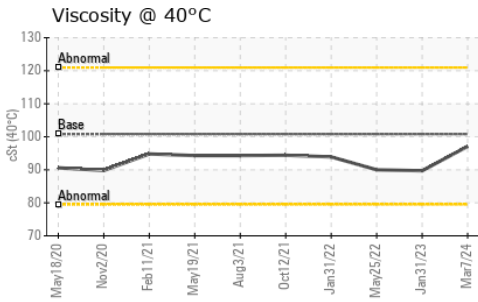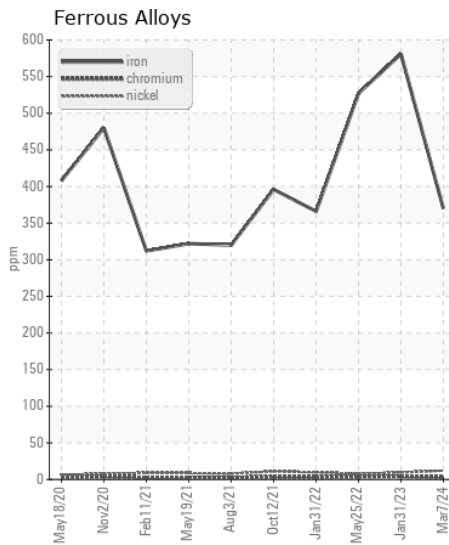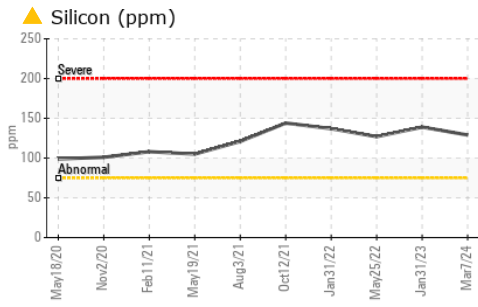

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116018
Lab Number : 06174464
Unique Number : 11020517
Test Package : FLEET
Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 13 May 2024 - Don Baldrige

PERDUE FARMS - BRIDGEVILLE
 8634 E NEWTON RD
 BRIDGEVILLE, DE
 US 19933
 Contact: GEORGE LACATES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: