



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2227006**  
 Component  
**Front Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0106102</b>	PCA0095538	---
Sample Date		Client Info		<b>24 Jan 2024</b>	17 Apr 2023	---
Machine Age	mls	Client Info		<b>66575</b>	30298	---
Oil Age	mls	Client Info		<b>66575</b>	0	---
Filter Age	mls	Client Info		<b>66575</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>149</b>	1	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>7</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>100	<b>1</b>	0	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>31</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	0	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>6</b>	<1	---
Boron	ppm	ASTM D5185m	400	<b>200</b>	332	---
Barium	ppm	ASTM D5185m	200	<b>2</b>	0	---
Molybdenum	ppm	ASTM D5185m	12	<b>2</b>	0	---
Manganese	ppm	ASTM D5185m		<b>20</b>	0	---
Magnesium	ppm	ASTM D5185m	12	<b>7</b>	0	---
Calcium	ppm	ASTM D5185m	150	<b>33</b>	0	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1209</b>	1477	---
Zinc	ppm	ASTM D5185m	125	<b>35</b>	0	---
Sulfur	ppm	ASTM D5185m	22500	<b>28102</b>	28143	---
Visc @ 40°C	cSt	ASTM D445	109	<b>96.3</b>	98.8	---

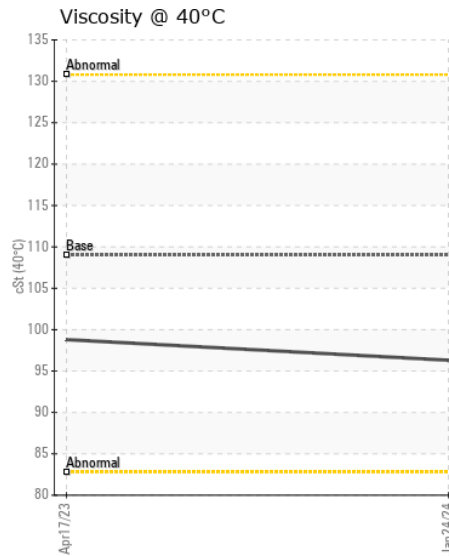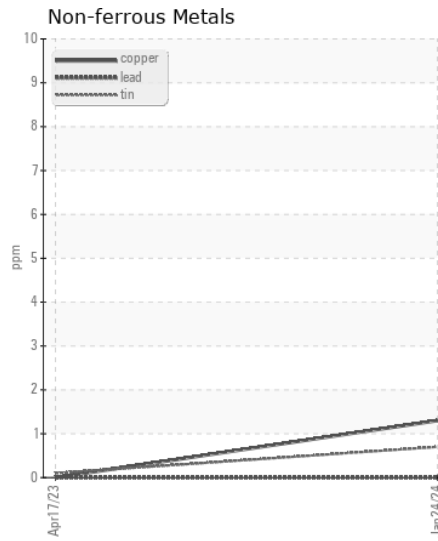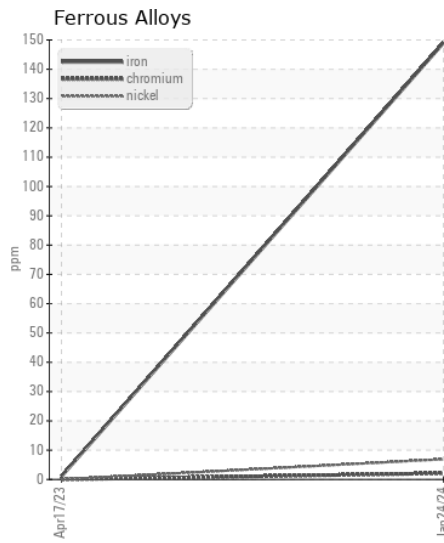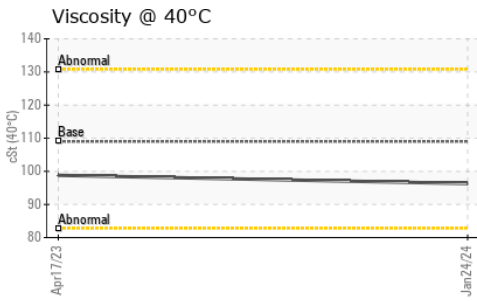

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106102  
**Lab Number** : 06174484  
**Unique Number** : 11020537  
**Test Package** : FLEET  
**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Don Baldrige

**PERDUE FARMS - BRIDGEVILLE**  
 8634 E NEWTON RD  
 BRIDGEVILLE, DE  
 US 19933  
 Contact: GEORGE LACATES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: