



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2126906
 Component
Rear Differential
 Fluid
GEAR OIL SAE 75W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0116032	PCA0105551	PCA0085292
Sample Date		Client Info		08 May 2024	01 Sep 2023	22 Dec 2022
Machine Age	mls	Client Info		272906	227516	157436
Oil Age	mls	Client Info		0	227516	157436
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185m	>500	187	202	182
Chromium	ppm	ASTM D5185m	>10	2	2	2
Nickel	ppm	ASTM D5185m	>10	5	6	6
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	3
Lead	ppm	ASTM D5185m	>25	0	<1	0
Copper	ppm	ASTM D5185m	>100	2	3	1
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>75	33	37	31
Potassium	ppm	ASTM D5185m	>20	4	4	3
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		7	8	8
Boron	ppm	ASTM D5185m	400	245	230	193
Barium	ppm	ASTM D5185m	200	<1	<1	0
Molybdenum	ppm	ASTM D5185m	12	<1	<1	1
Manganese	ppm	ASTM D5185m		11	13	12
Magnesium	ppm	ASTM D5185m	12	6	7	8
Calcium	ppm	ASTM D5185m	150	22	25	25
Phosphorus	ppm	ASTM D5185m	1650	1297	1275	1109
Zinc	ppm	ASTM D5185m	125	28	33	31
Sulfur	ppm	ASTM D5185m	22500	26622	27214	23344
Visc @ 40°C	cSt	ASTM D445	109	94.6	97.0	95.0

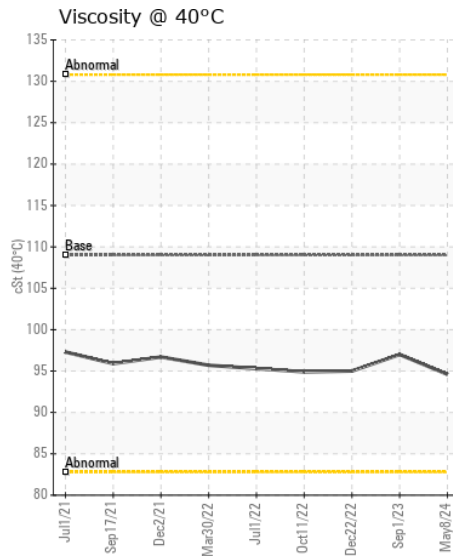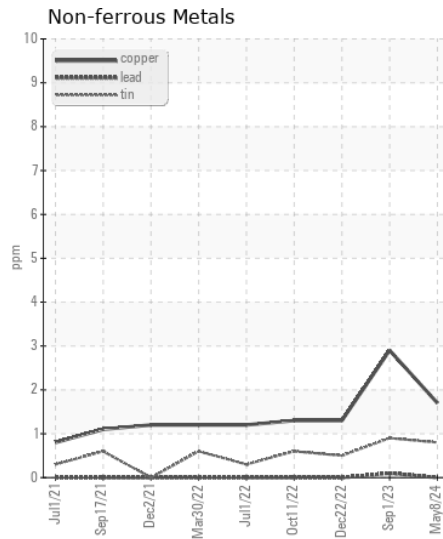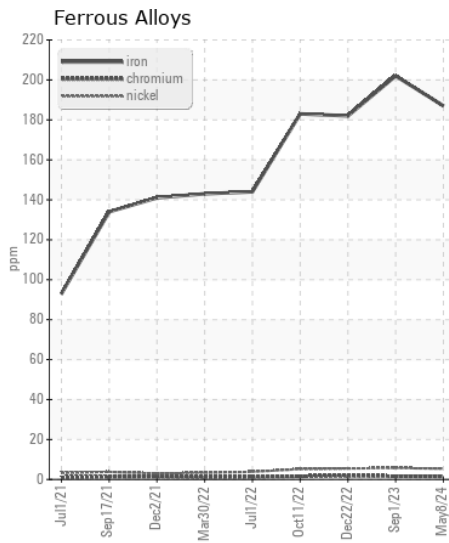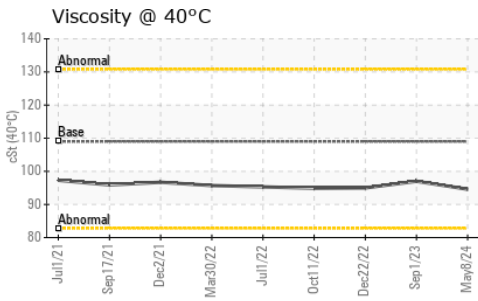

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116032
Lab Number : 06174489
Unique Number : 11020542
Test Package : FLEET

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

PERDUE FARMS - BRIDGEVILLE
 8634 E NEWTON RD
 BRIDGEVILLE, DE
 US 19933
 Contact: GEORGE LACATES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: