



TRAAP

Texas Refinery Advanced Analysis Program

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

**T14**

Component

**1 Transmission (Manual)**

Fluid

**TRC TEXTRANS MULTI-VEHICLE SYN ATF (10 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR0001507	TR0001299	TR0001137
Sample Date		Client Info		03 May 2024	09 Jan 2024	15 Sep 2023
Machine Age	hrs	Client Info		4759	4203	3615
Oil Age	hrs	Client Info		4759	4203	3615
Filter Age	hrs	Client Info		4759	4203	3615
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	113	112	113
Chromium	ppm	ASTM D5185m	>5	1	1	2
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	4	4
Lead	ppm	ASTM D5185m	>45	<1	0	<1
Copper	ppm	ASTM D5185m	>225	39	40	38
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>125	7	7	6
Potassium	ppm	ASTM D5185m	>20	2	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	4	2
Boron	ppm	ASTM D5185m		146	152	155
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	1	2
Manganese	ppm	ASTM D5185m		6	6	5
Magnesium	ppm	ASTM D5185m		5	3	5
Calcium	ppm	ASTM D5185m		253	242	256
Phosphorus	ppm	ASTM D5185m		487	503	481
Zinc	ppm	ASTM D5185m		65	64	71
Sulfur	ppm	ASTM D5185m		538	413	617
Acid Number (AN)	mg KOH/g	ASTM D8045		1.21	1.16	1.22
Visc @ 40°C	cSt	ASTM D445		92.8	96.2	110
Visc @ 100°C	cSt	ASTM D445	7.3	13.6	14.2	15.6
Viscosity Index (VI)	Scale	ASTM D2270	193	148	151	150

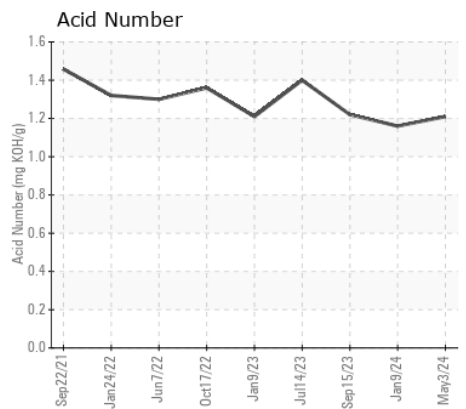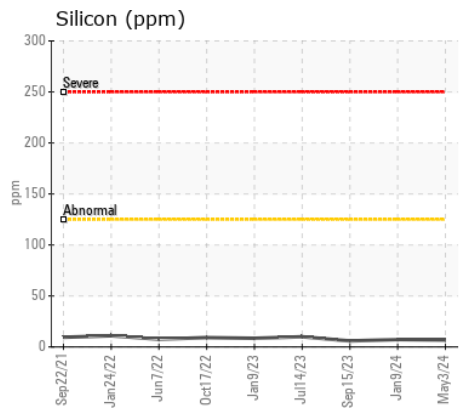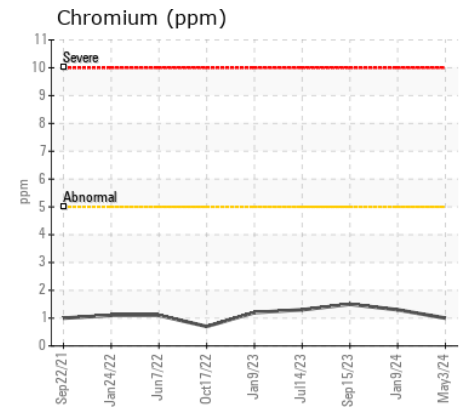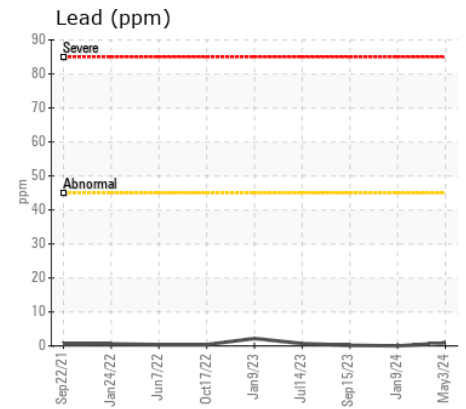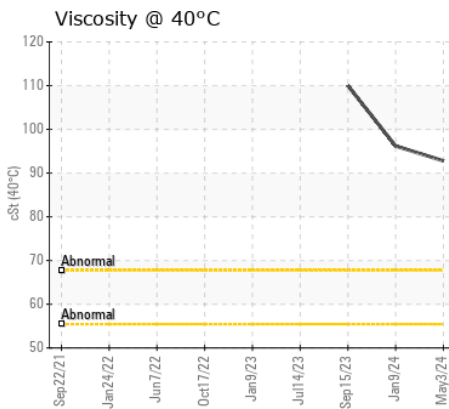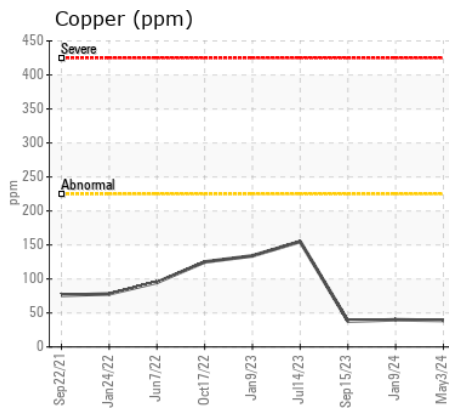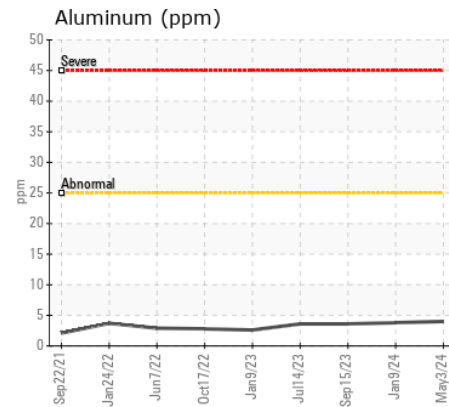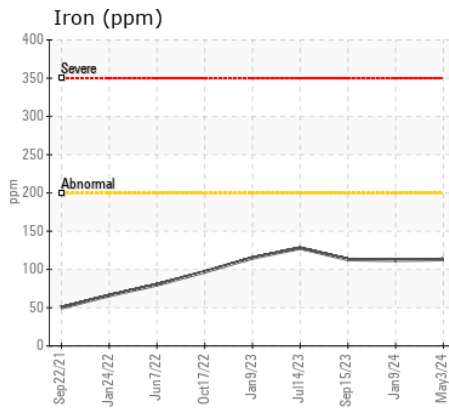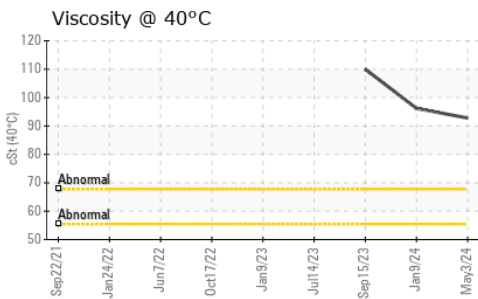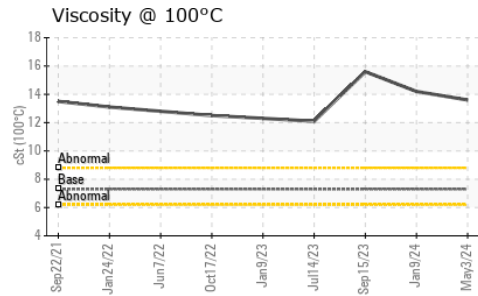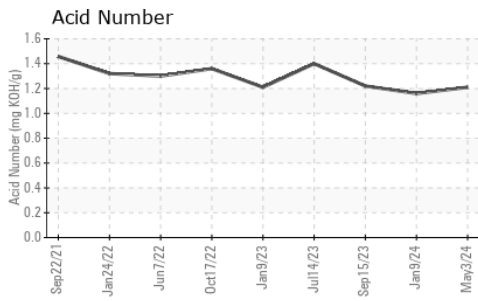

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR0001507 **Received** : 09 May 2024  
**Lab Number** : 06174702 **Tested** : 10 May 2024  
**Unique Number** : 11020755 **Diagnosed** : 13 May 2024 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

**S S CONCRETE MATERIALS LLC**  
 P.O. BOX 23283  
 BULLHEAD CITY, AZ  
 US 86439  
 Contact: SERVICE MANAGER  
 snsmaterials1@gmail.com  
 T:  
 F: (928)754-1991

To discuss this sample report, contact Customer Service at 1-800-827-0711.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)