



TRAAP

Texas Refinery Advanced Analysis Program

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**T14**  
 Component  
**1 Diesel Engine**  
 Fluid  
**TRC MOLY XL PROSPEC III 15W40 (10 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR0001535	TR0001297	TR0001138
Sample Date		Client Info		03 May 2024	09 Jan 2024	15 Sep 2023
Machine Age	hrs	Client Info		4759	4203	3615
Oil Age	hrs	Client Info		4759	4203	3615
Filter Age	hrs	Client Info		4759	4203	3615
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	30	18	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	4	3	3
Lead	ppm	ASTM D5185m	>40	3	1	<1
Copper	ppm	ASTM D5185m	>330	0	0	<1
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

## CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	7	5
Potassium	ppm	ASTM D5185m	>20	7	5	4
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.7	0.5	0
Nitration	Abs/cm	*ASTM D7624	>20	9.3	8.1	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.0	21.1	19.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	<1
Boron	ppm	ASTM D5185m		0	2	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		11	17	15
Calcium	ppm	ASTM D5185m	4500	2492	2292	2318
Phosphorus	ppm	ASTM D5185m		922	945	868
Zinc	ppm	ASTM D5185m	1400	1085	1125	1067
Sulfur	ppm	ASTM D5185m		3826	3378	3712
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.2	13.0	11.2
Base Number (BN)	mg KOH/g	ASTM D2896	15	5.08	4.66	8.14
Visc @ 100°C	cSt	ASTM D445	15.5	15.2	15.1	15.4

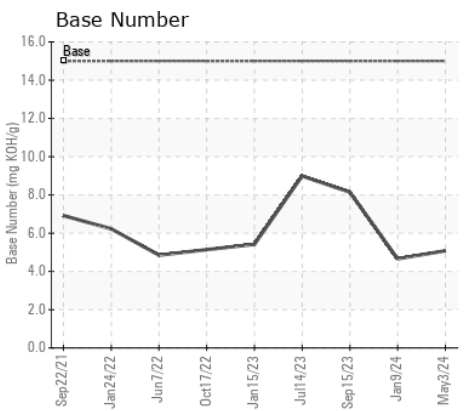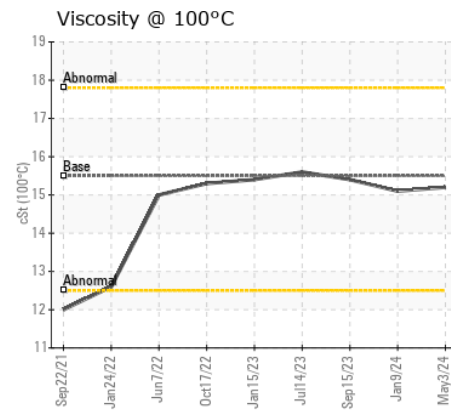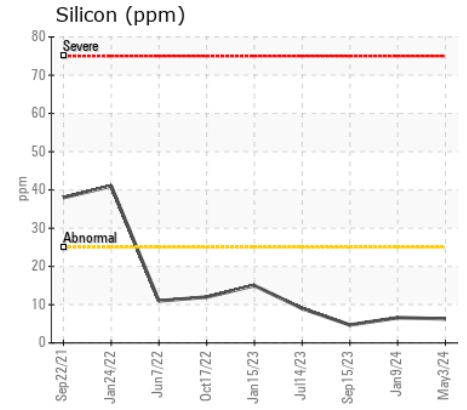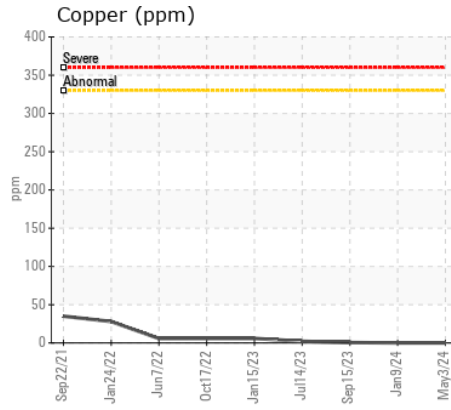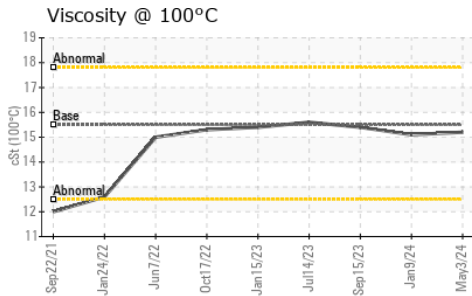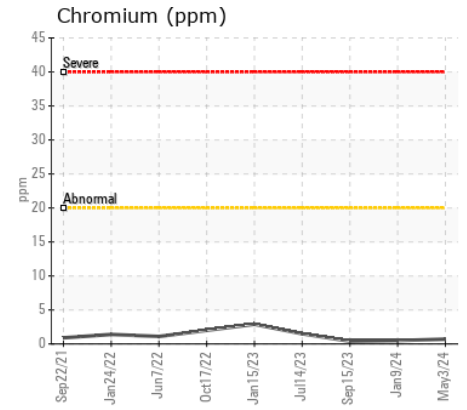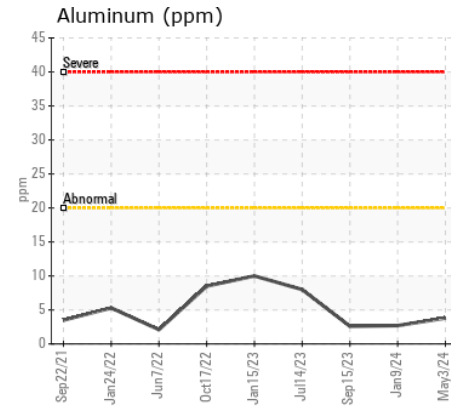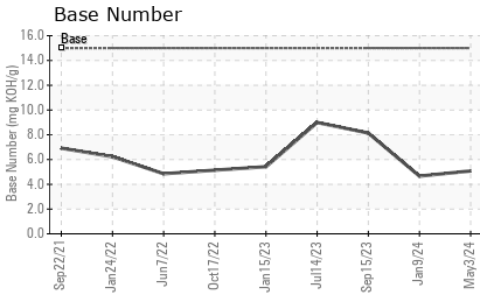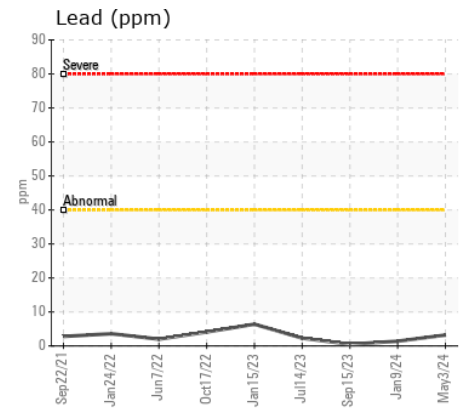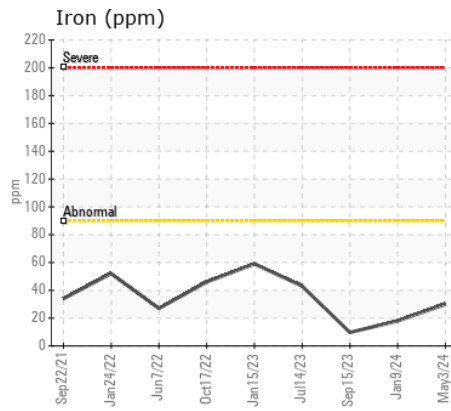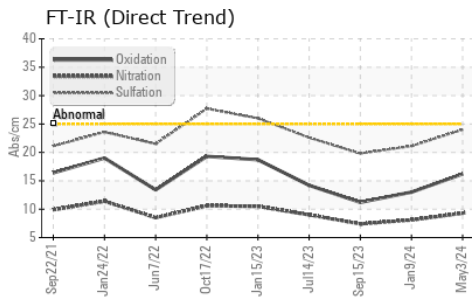

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR0001535  
**Lab Number** : 06174740  
**Unique Number** : 11020793  
**Test Package** : MOB 2  
**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Sean Felton

**S S CONCRETE MATERIALS LLC**  
 P.O. BOX 23283  
 BULLHEAD CITY, AZ  
 US 86439  
 Contact: SERVICE MANAGER  
 snsmaterials1@gmail.com  
 T:  
 F: (928)754-1991

To discuss this sample report, contact Customer Service at 1-800-827-0711.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)