



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2343**  
 Component  
**Diesel Engine**  
 Fluid  
**ROYAL PURPLE MOTOR OIL 15W40 (48 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0720072</b>	WC0720155	WC0720163
Sample Date		Client Info		<b>18 Apr 2024</b>	09 Dec 2023	11 Oct 2023
Machine Age	mls	Client Info		<b>368372</b>	323502	264210
Oil Age	mls	Client Info		<b>50000</b>	100000	50000
Filter Age	mls	Client Info		<b>50000</b>	50000	50000
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>39</b>	45	17
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>11</b>	12	6
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>35</b>	26	25
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>8</b>	12	5
Potassium	ppm	ASTM D5185m	>20	<b>21</b>	19	14
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1.2</b>	1.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	12.7	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.3</b>	28.9	21.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	3	3
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>2</b>	2	3
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	60	<b>38</b>	62	51
Calcium	ppm	ASTM D5185m	3050	<b>2523</b>	2656	2307
Phosphorus	ppm	ASTM D5185m	1050	<b>1006</b>	1023	820
Zinc	ppm	ASTM D5185m	1200	<b>1151</b>	1301	1070
Sulfur	ppm	ASTM D5185m	12500	<b>3556</b>	3404	2938
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.8</b>	23.5	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>5.5</b>	3.8	5.0
Visc @ 100°C	cSt	ASTM D445	14.9	<b>13.2</b>	14.1	13.2


**FT-IR (Direct Trend)**

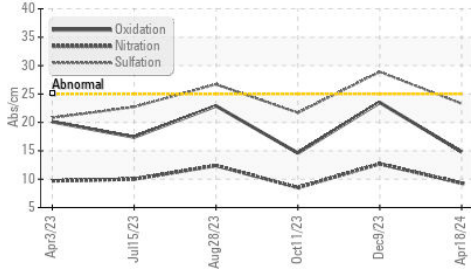


**Ferrous Alloys**

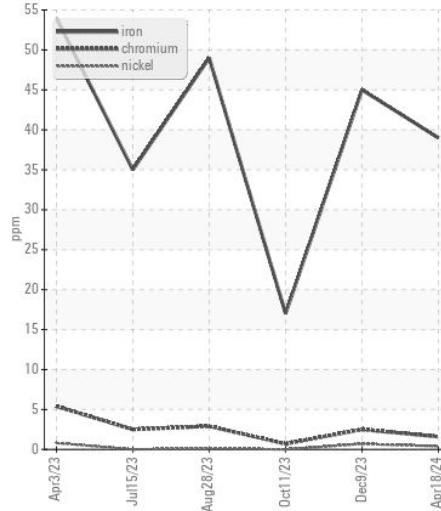


**Base Number**

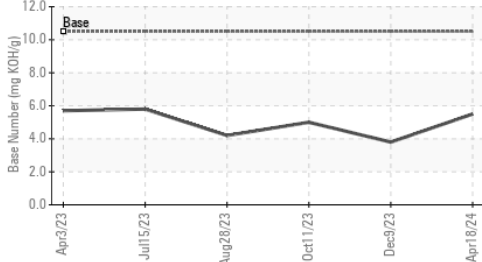


**Non-ferrous Metals**

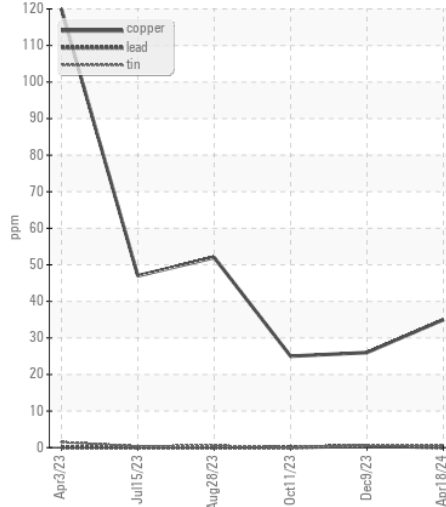


**Viscosity @ 100°C**

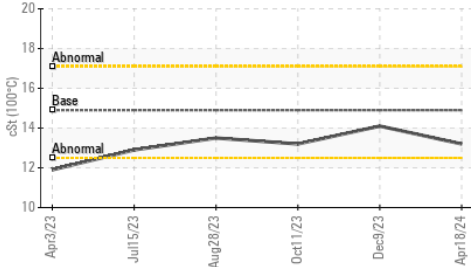

**Viscosity @ 100°C**

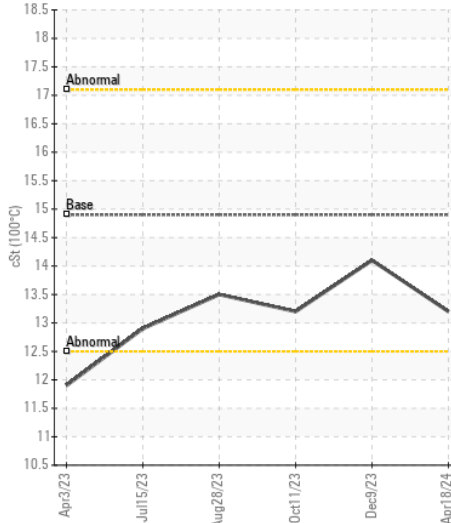

**Base Number**

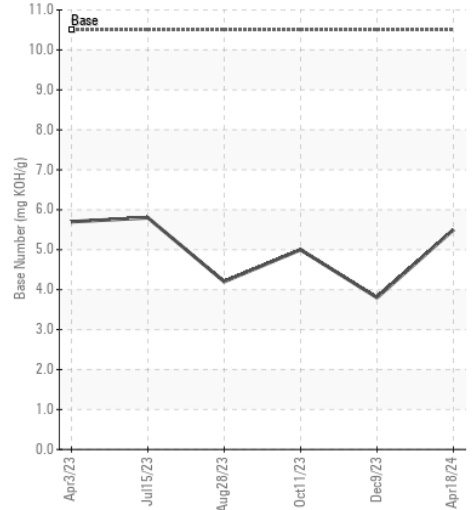

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0720072  
**Lab Number** : 06174818  
**Unique Number** : 11020871  
**Test Package** : FLEET

**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 10 May 2024 - Wes Davis

**DILLON TRANSPORTATION**  
 974 TN WALTZ PARKWAY  
 ASHLAND CITY, TN  
 US 37015

Contact: MASON NICHOLSON  
 M.NICHOLSON@DILLONTRANSPORTATION.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (615)792-5099  
 F: (615)469-4200