



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(F989HW)
Machine Id
720031
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0098895	GFL0098856	GFL0098973
Sample Date		Client Info		03 May 2024	28 Feb 2024	03 Jan 2024
Machine Age	hrs	Client Info		25012	24844	24741
Oil Age	hrs	Client Info		24844	24491	24491
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	None
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	17	16	8
Chromium	ppm	ASTM D5185m	>15	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>15	3	3	3
Lead	ppm	ASTM D5185m	>70	0	4	3
Copper	ppm	ASTM D5185m	>175	<1	<1	<1
Tin	ppm	ASTM D5185m	>5	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	8	4	2
Potassium	ppm	ASTM D5185m	>20	33	▲ 77	37
Fuel		WC Method	>3.0	<1.0	▲ 2.0	1.7
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.3	6.3	5.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	18.4	17.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		36	▲ 122	66
Boron	ppm	ASTM D5185m	0	0	1	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	59	72	61
Manganese	ppm	ASTM D5185m	0	0	0	<1
Magnesium	ppm	ASTM D5185m	1010	857	960	920
Calcium	ppm	ASTM D5185m	1070	1040	1134	986
Phosphorus	ppm	ASTM D5185m	1150	969	1165	1021
Zinc	ppm	ASTM D5185m	1270	1129	1256	1230
Sulfur	ppm	ASTM D5185m	2060	2838	3452	3130
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	13.7	13.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.0	8.9	9.2
Visc @ 100°C	cSt	ASTM D445	15.4	12.6	● 11.7	12.3


FT-IR (Direct Trend)

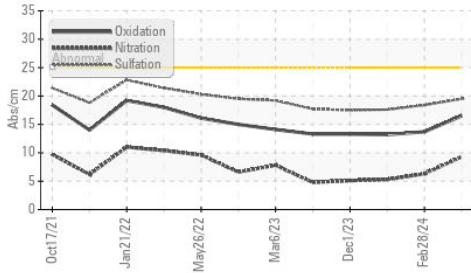


Base Number

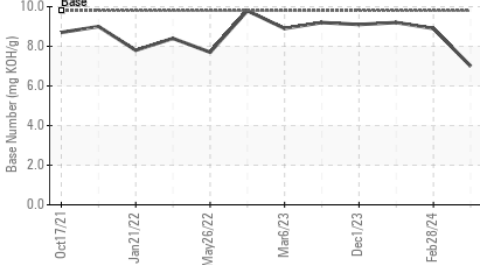


Viscosity @ 100°C

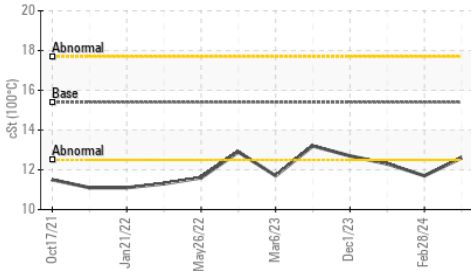


Ferrous Alloys

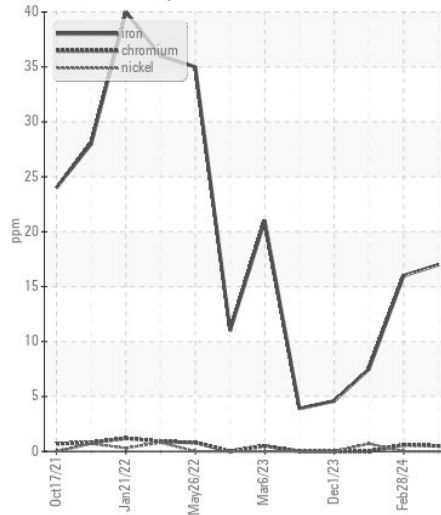


Non-ferrous Metals

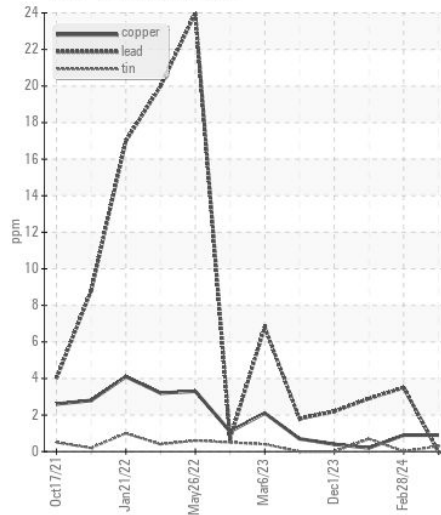

Viscosity @ 100°C

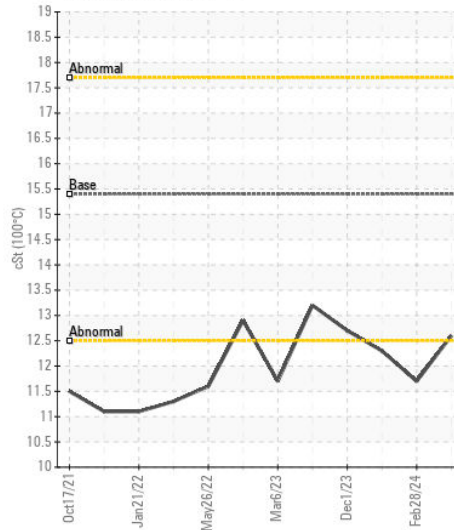

Base Number

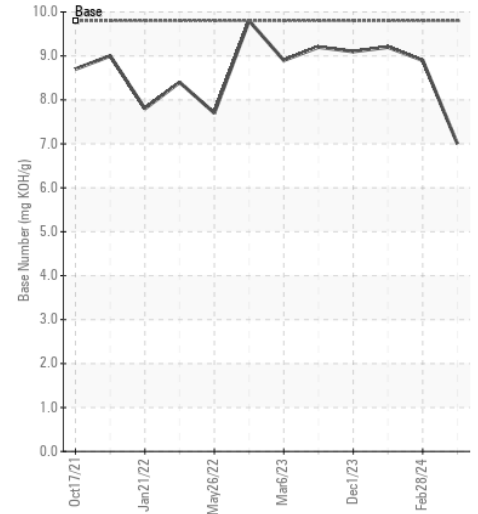

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0098895
Lab Number : 06174957
Unique Number : 11021010
Test Package : FLEET

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

GFL Environmental - 084 - Clarksville
 699 Jack Miller Boulevard
 Clarksville, TN
 US 37042

Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com

T: (931)552-7276
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)