



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3205L
Component
Front Diesel Engine
Fluid
MOBIL 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06175109	IL0028857	IL0025880
Sample Date		Client Info		16 Apr 2024	12 Oct 2023	19 Jan 2023
Machine Age	mls	Client Info		0	210801	198581
Oil Age	mls	Client Info		15000	12380	17510
Filter Age	mls	Client Info		0	12380	17510
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	23	37	38
Chromium	ppm	ASTM D5185m	>20	0	<1	1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	15	17
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	1	1
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	4	5
Potassium	ppm	ASTM D5185m	>20	1	4	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	6.2	9.1	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	19.8	23.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	<1	1	2
Boron	ppm	ASTM D5185m		0	3	19
Barium	ppm	ASTM D5185m		0	0	4
Molybdenum	ppm	ASTM D5185m		59	59	35
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		978	902	648
Calcium	ppm	ASTM D5185m		1104	1059	1261
Phosphorus	ppm	ASTM D5185m		1061	961	703
Zinc	ppm	ASTM D5185m		1262	1186	956
Sulfur	ppm	ASTM D5185m		3627	3161	2824
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	16.8	20.8
Base Number (BN)	mg KOH/g	ASTM D2896		9.7	7.9	7.4
Visc @ 100°C	cSt	ASTM D445		13.0	13.7	13.3

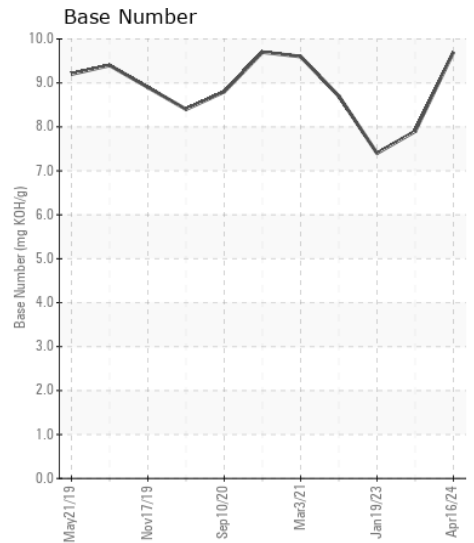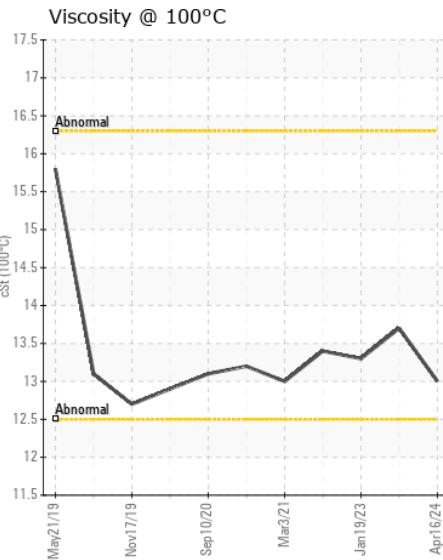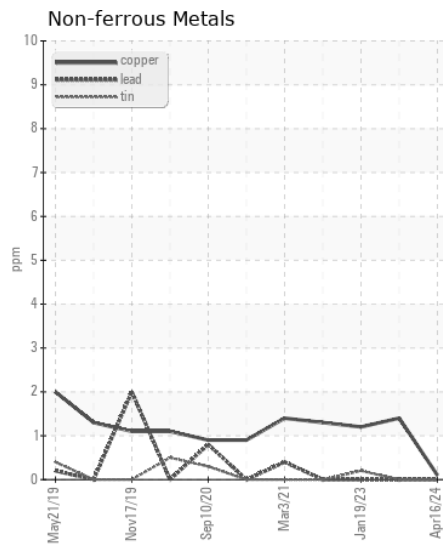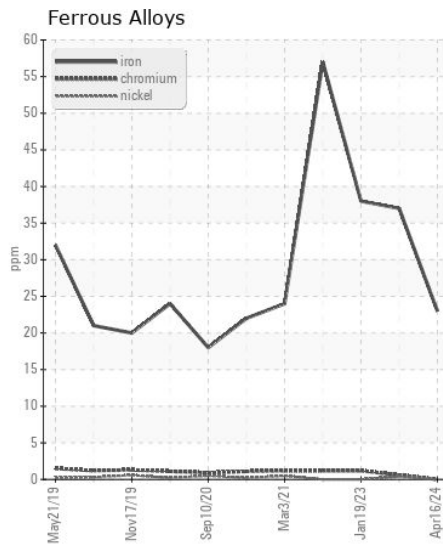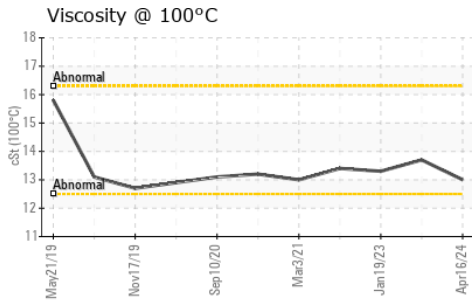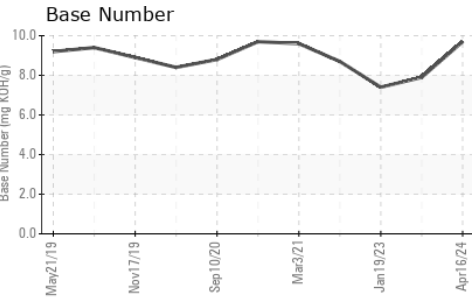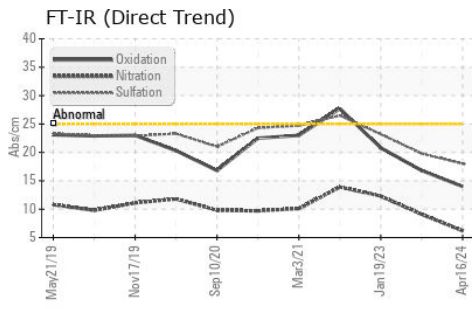

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06175109
Lab Number : 06175109
Unique Number : 11021162
Test Package : FLEET
Received : 10 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

RUSH TRUCK CENTER - CHICAGO IDEALEASE
 4655 SOUTH CENTRAL AVENUE
 CHICAGO, IL
 US 60638
 Contact: MIKE LINLEY
 linleym@rushtruckcenters.com
 T: (708)496-7500
 F: (708)496-8818

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)