



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 245P 1FF245PALNF000047
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212337	JR0179794	---
Sample Date		Client Info		09 May 2024	06 Nov 2023	---
Machine Age	hrs	Client Info		962	538	---
Oil Age	hrs	Client Info		962	538	---
Filter Age	hrs	Client Info		962	538	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	7	16	---
Chromium	ppm	ASTM D5185m	>11	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	6	3	---
Lead	ppm	ASTM D5185m	>26	<1	<1	---
Copper	ppm	ASTM D5185m	>26	<1	8	---
Tin	ppm	ASTM D5185m	>4	2	5	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	10	26	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	7.4	6.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	15.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	1	<1	---
Boron	ppm	ASTM D5185m		262	156	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		228	0	---
Manganese	ppm	ASTM D5185m		1	5	---
Magnesium	ppm	ASTM D5185m		767	15	---
Calcium	ppm	ASTM D5185m		1487	2126	---
Phosphorus	ppm	ASTM D5185m		942	937	---
Zinc	ppm	ASTM D5185m		1088	1220	---
Sulfur	ppm	ASTM D5185m		3464	2637	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	9.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.1	8.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	12.8	---

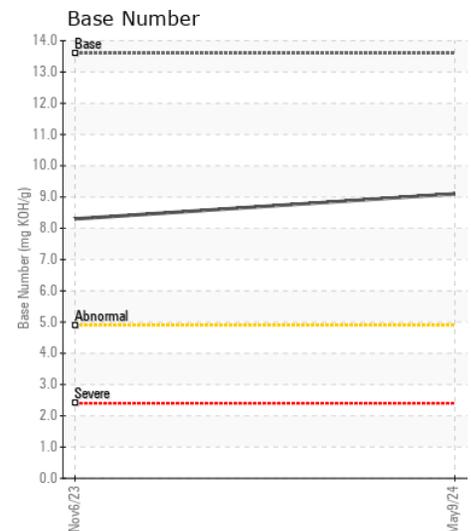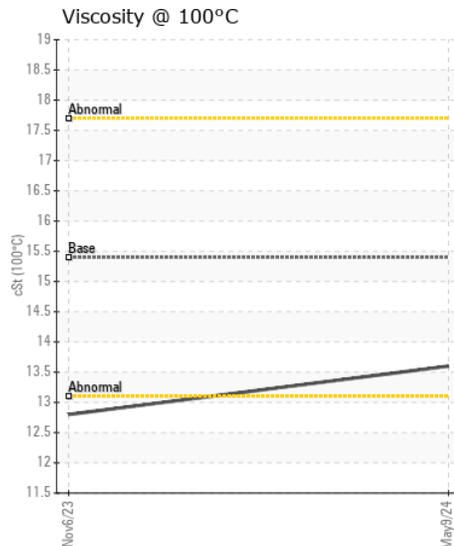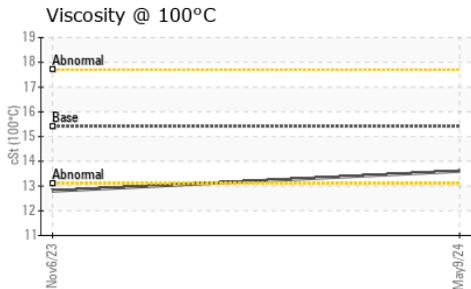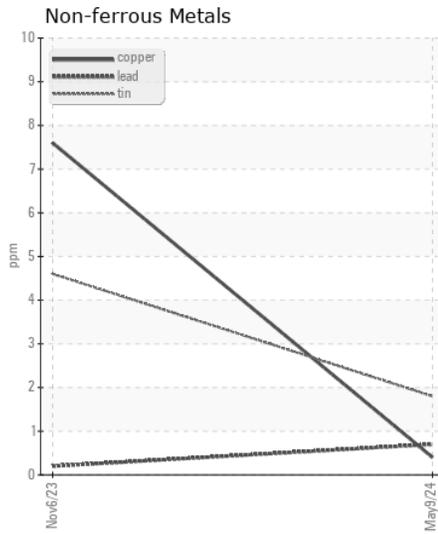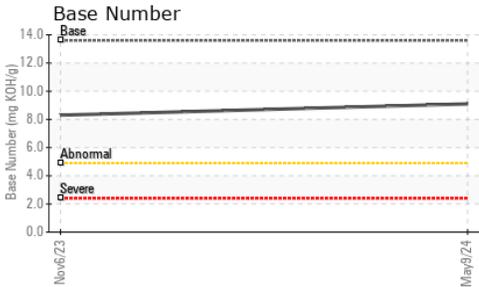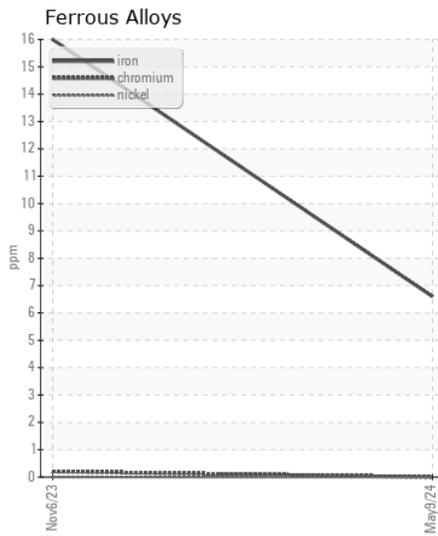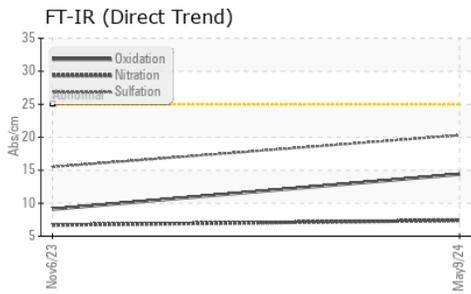

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212337 **Received** : 10 May 2024
Lab Number : 06175239 **Tested** : 13 May 2024
Unique Number : 11021292 **Diagnosed** : 13 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)