



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	ATTENTION

Machine Id
846-4988
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.









CONTAMINATION

Light fuel dilution occurring.

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019339	RPL0017344	RPL0015559
Sample Date		Client Info		20 Apr 2024	23 Dec 2023	23 Sep 2023
Machine Age	mls	Client Info		33767	21524	11332
Oil Age	mls	Client Info		0	21524	11332
Filter Age	mls	Client Info		0	21524	11332
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				ATTENTION	ABNORMAL	MARGINAL
Iron	ppm	ASTM D5185m	>100	28	100	49
Chromium	ppm	ASTM D5185m	>20	<1	4	2
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	12	18	12
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	10	58	47
Tin	ppm	ASTM D5185m	>15	<1	1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	10	39	33
Potassium	ppm	ASTM D5185m	>20	35	13	8
Fuel	%	ASTM D3524	>5	▲ 3.5	▲ 4.6	▲ 3.5
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	10.1	13.8	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.1	32.5	25.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		2	4	5
Boron	ppm	ASTM D5185m	0	10	80	156
Barium	ppm	ASTM D5185m	0	0	1	<1
Molybdenum	ppm	ASTM D5185m	0	68	111	100
Manganese	ppm	ASTM D5185m		2	12	8
Magnesium	ppm	ASTM D5185m	0	920	680	622
Calcium	ppm	ASTM D5185m		1131	1465	1327
Phosphorus	ppm	ASTM D5185m		1007	696	599
Zinc	ppm	ASTM D5185m		1181	823	741
Sulfur	ppm	ASTM D5185m		3294	2098	2105
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.5	41.0	25.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	6.3	▲ 1.9	5.9
Visc @ 100°C	cSt	ASTM D445	14	● 11.5	11.9	12.1

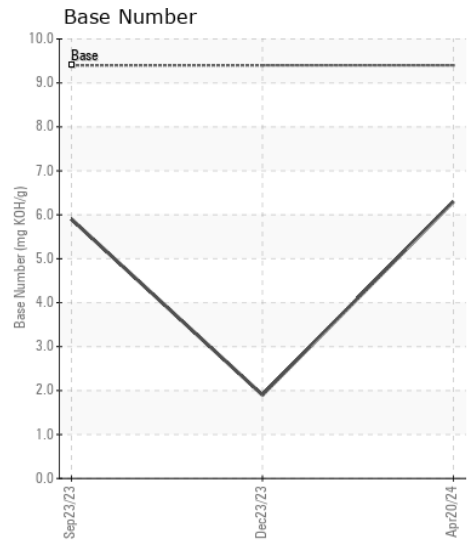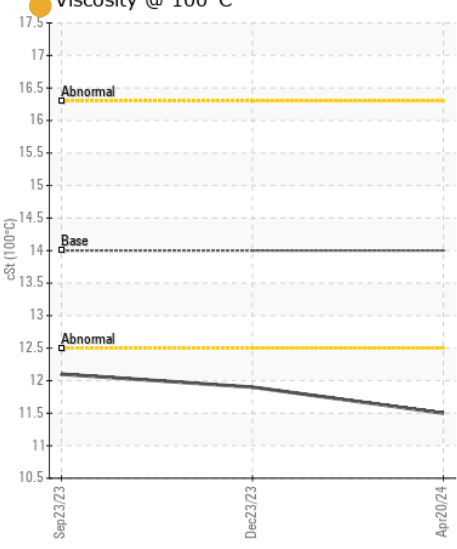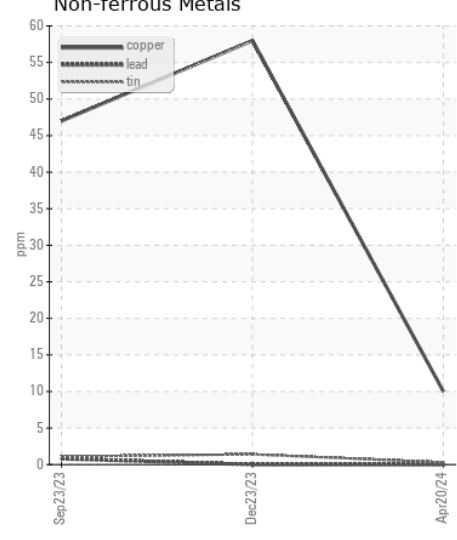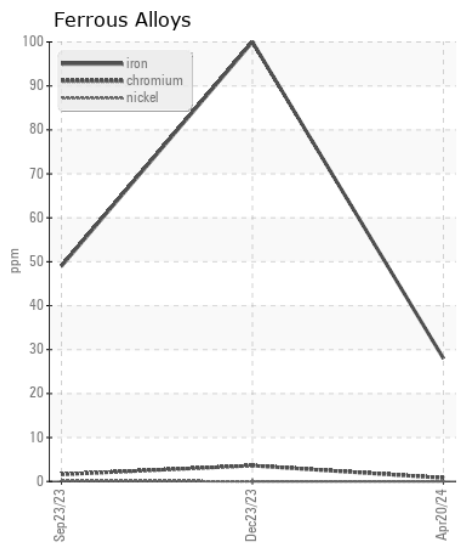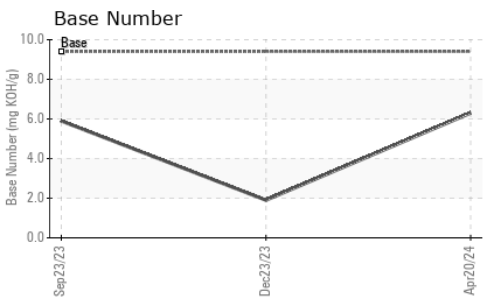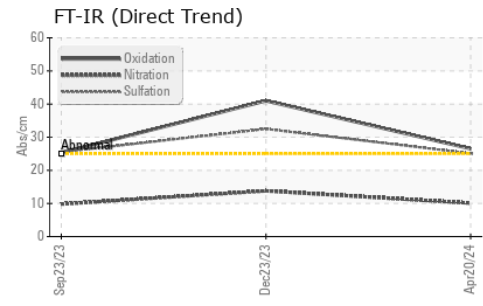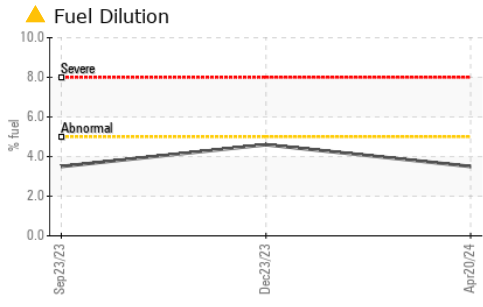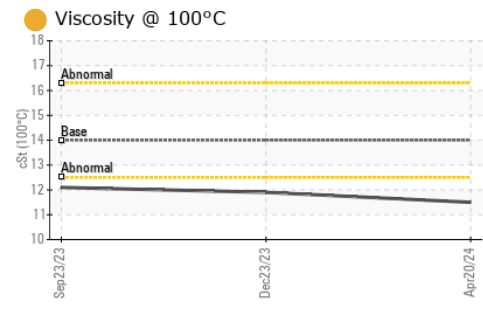

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0019339 **Received** : 10 May 2024
Lab Number : 06175315 **Tested** : 16 May 2024
Unique Number : 11021368 **Diagnosed** : 16 May 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: PercentFuel)

RTL PACLEASE - 7006 - Pico Rivera
 7837 Telegraph Rd
 Pico Rivera, CA
 US 90660
 Contact: GERARDO CARROLA
 carrolag@rushenterprises.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)