



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W66430]

Machine Id

JOHN DEERE 624P 1DW624PAPMLZ11868

Component

Hydraulic System

Fluid

JOHN DEERE HYDRAU (20 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W66430)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0205475	JR0203398	JR0188956
Sample Date		Client Info		09 May 2024	18 Feb 2024	10 Oct 2023
Machine Age	hrs	Client Info		4626	4294	3658
Oil Age	hrs	Client Info		332	3087	2629
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Changed	Not Chngd
Filter Changed		Client Info		Not Chngd	Changed	Not Chngd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	2	3	3
Chromium	ppm	ASTM D5185m	>10	4	7	7
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	<1	0	1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	1	2	2
Potassium	ppm	ASTM D5185m	>20	3	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	3451	---	4874
Particles >6µm		ASTM D7647	>1300	299	---	272
Particles >14µm		ASTM D7647	>160	25	---	27
Particles >21µm		ASTM D7647	>40	6	---	6
Particles >38µm		ASTM D7647	>10	0	---	0
Particles >71µm		ASTM D7647	>3	0	---	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/15/12	---	19/15/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	3
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		1	0	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		6	6	0
Calcium	ppm	ASTM D5185m	87	95	82	82
Phosphorus	ppm	ASTM D5185m	727	646	551	590
Zinc	ppm	ASTM D5185m	900	786	707	795
Sulfur	ppm	ASTM D5185m	1500	2046	1762	1631
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.63	0.49	0.55
Visc @ 40°C	cSt	ASTM D445	65	60.1	59.5	58.0

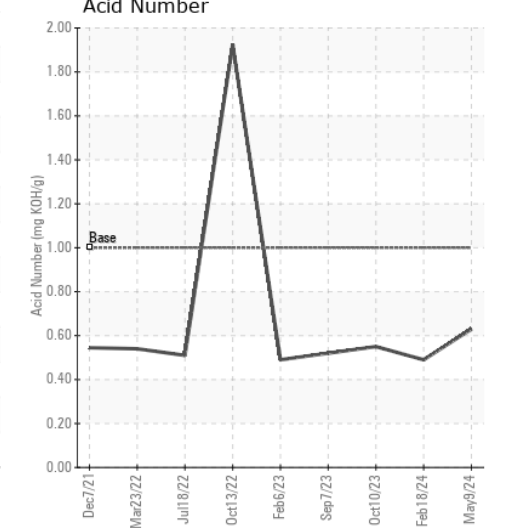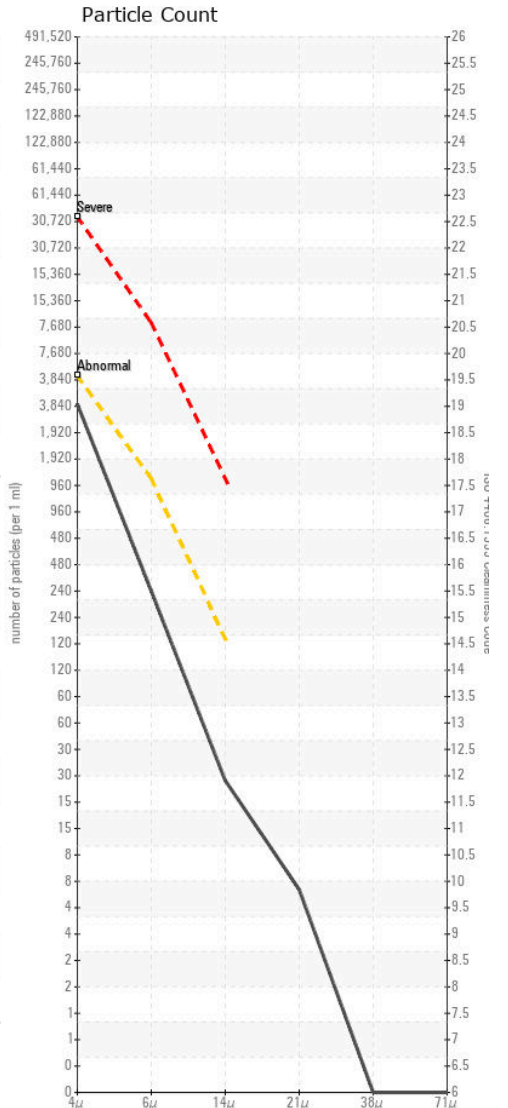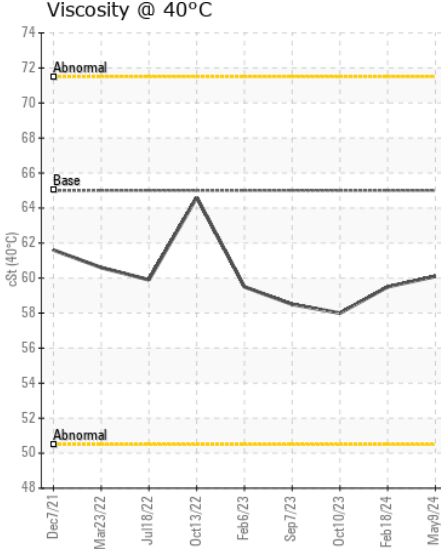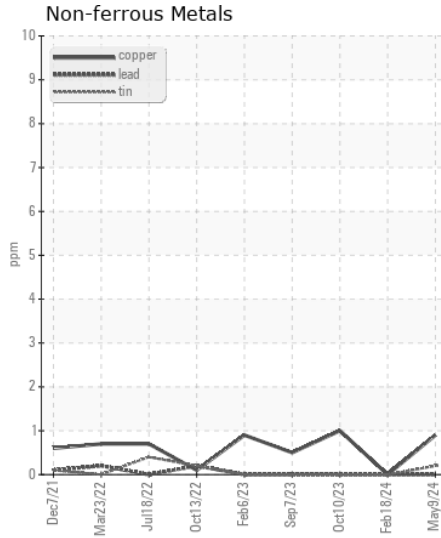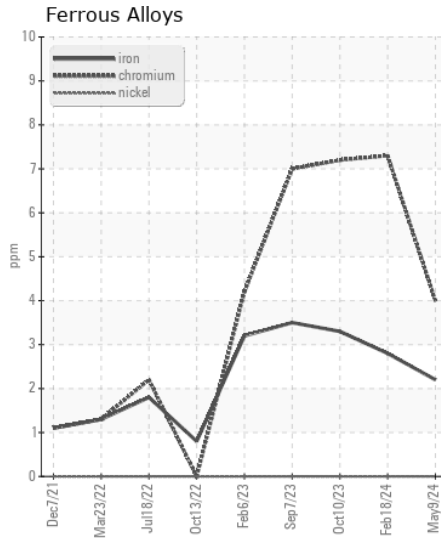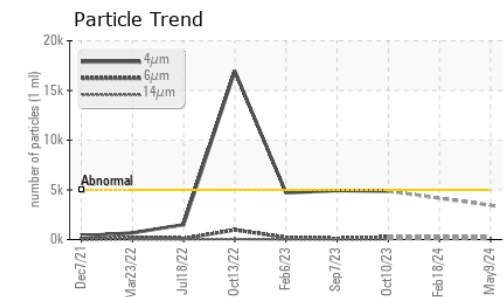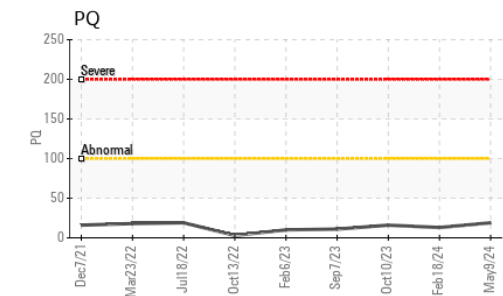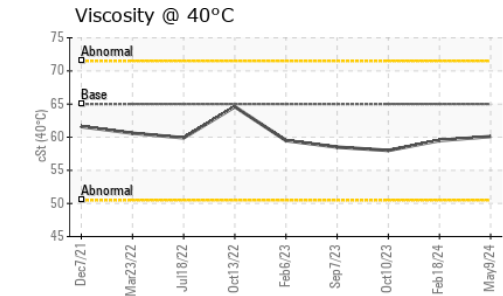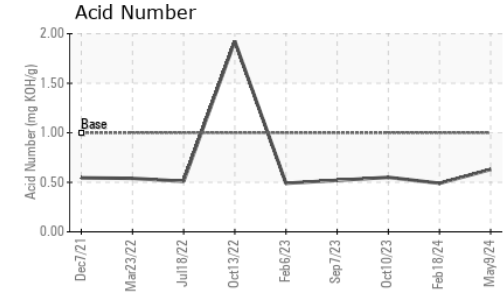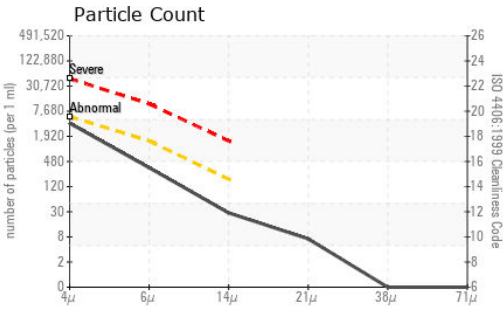

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0205475 **Received** : 10 May 2024
Lab Number : 06175374 **Tested** : 13 May 2024
Unique Number : 11021427 **Diagnosed** : 14 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)