



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[US GYPSUM]
Machine Id
LIEBHERR L566 071890-1758
Component
Hydraulic System
Fluid
LIEBHERR HYDRAULIC HVI (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0217102	---	---
Sample Date		Client Info		23 Apr 2024	---	---
Machine Age	hrs	Client Info		3662	---	---
Oil Age	hrs	Client Info		3662	---	---
Filter Age	hrs	Client Info		1500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	11	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	3	---	---
Copper	ppm	ASTM D5185m	>75	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	4	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>20000	6726	---	---
Particles >6µm		ASTM D7647	>5000	246	---	---
Particles >14µm		ASTM D7647	>640	7	---	---
Particles >21µm		ASTM D7647	>160	2	---	---
Particles >38µm		ASTM D7647	>40	0	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/15/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	7	8	---	---
Calcium	ppm	ASTM D5185m	1500	1321	---	---
Phosphorus	ppm	ASTM D5185m	750	633	---	---
Zinc	ppm	ASTM D5185m	820	703	---	---
Sulfur	ppm	ASTM D5185m	4000	3599	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.2	1.27	---	---
Visc @ 40°C	cSt	ASTM D445	52	44.5	---	---

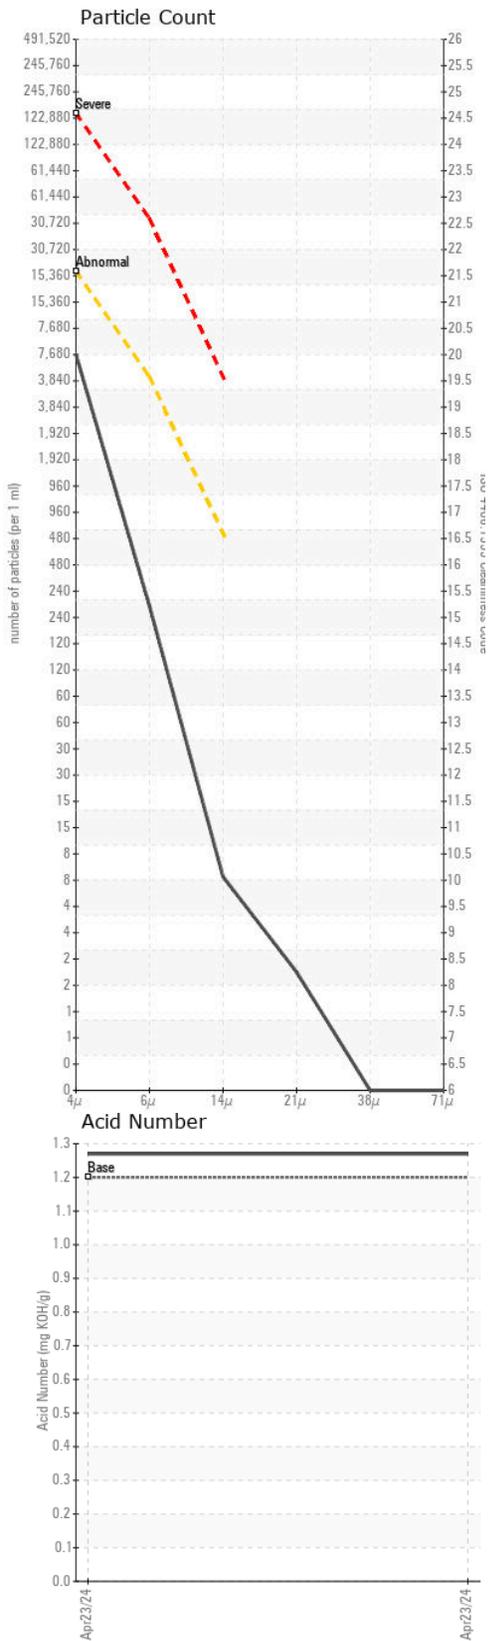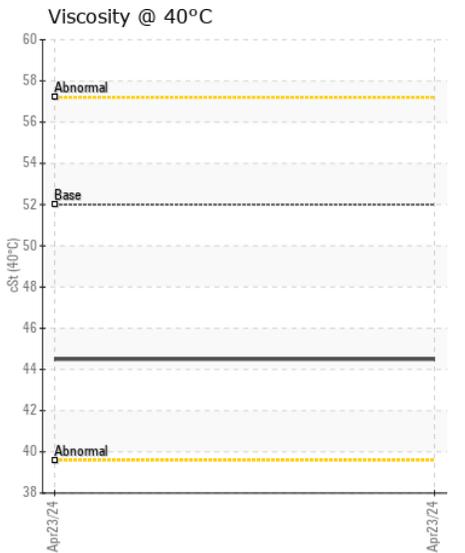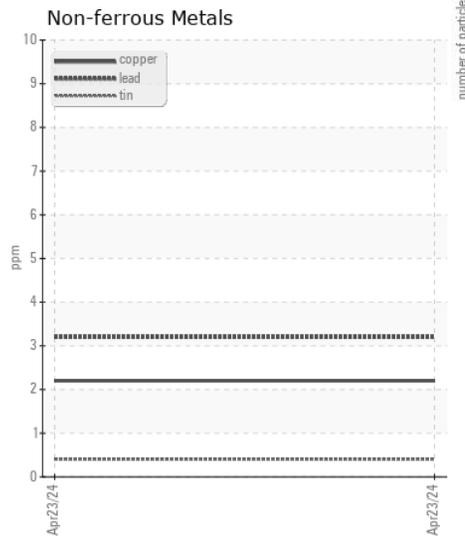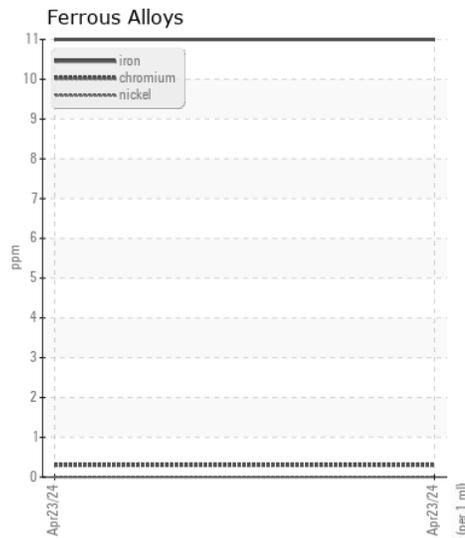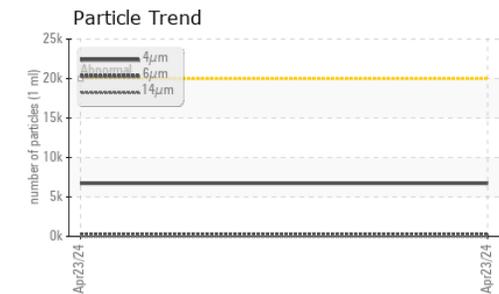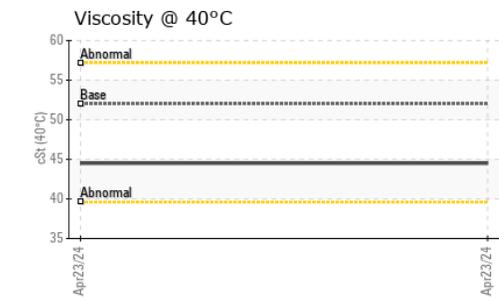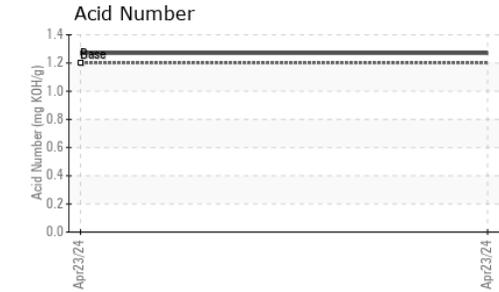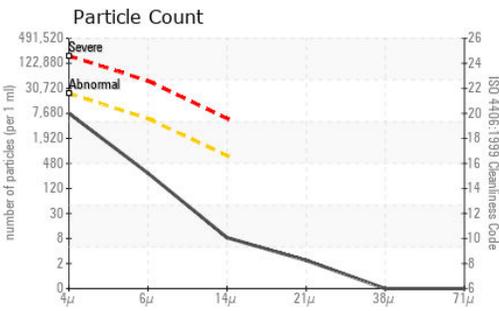

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LH0217102
 Lab Number : 06175385
 Unique Number : 11021438
 Test Package : MOBCE

Received : 10 May 2024
 Tested : 13 May 2024
 Diagnosed : 13 May 2024 - Wes Davis

NUECES POWER EQUIPMENT
 7333 MONROE RD
 HOUSTON, TX
 US 77061

Contact: Keith Frischenmeyer
 keith@npetex.com
 T: (713)247-0066
 F: (713)636-4039

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)