



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**FORD F-550 V121**  
Component  
**Transmission**  
Fluid  
**ATF (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0206136</b>	---	---
Sample Date		Client Info		<b>01 May 2024</b>	---	---
Machine Age	mls	Client Info		<b>5352</b>	---	---
Oil Age	mls	Client Info		<b>5352</b>	---	---
Filter Age	mls	Client Info		<b>5352</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

PQ		ASTM D8184		<b>19</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>31</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>6</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>21</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>6</b>	---	---
Boron	ppm	ASTM D5185m		<b>69</b>	---	---
Barium	ppm	ASTM D5185m		<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>26</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>119</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>268</b>	---	---
Zinc	ppm	ASTM D5185m		<b>24</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1057</b>	---	---
Visc @ 40°C	cSt	ASTM D445	35.0	<b>19.7</b>	---	---

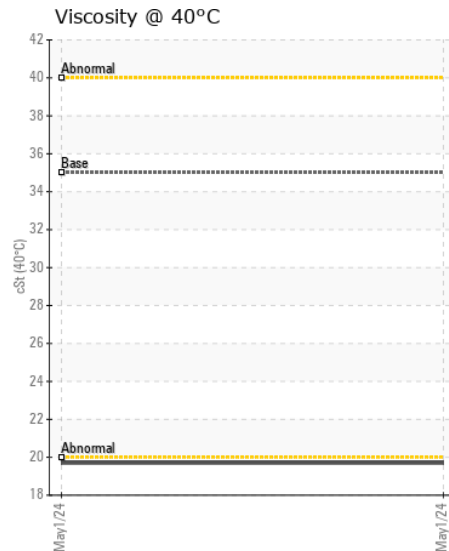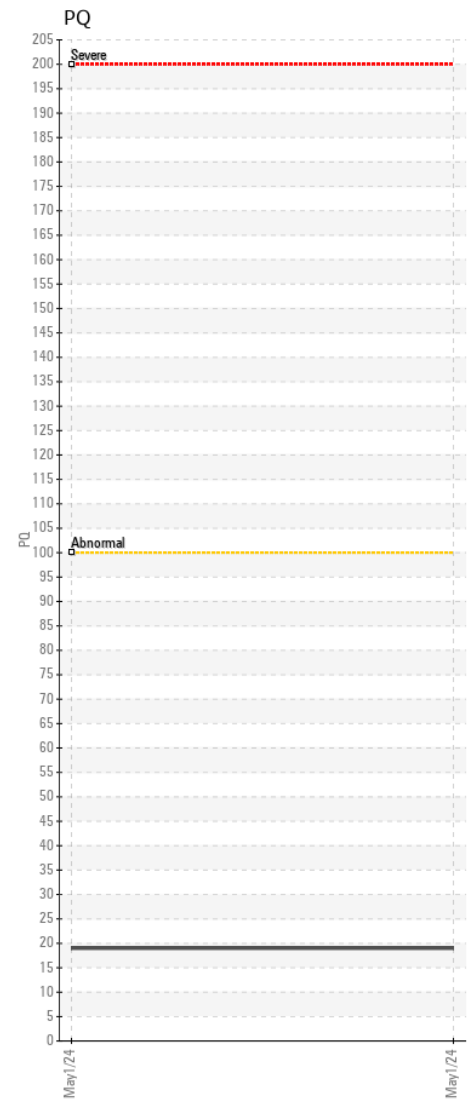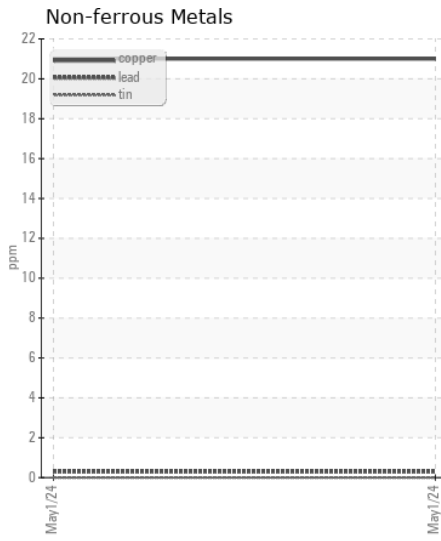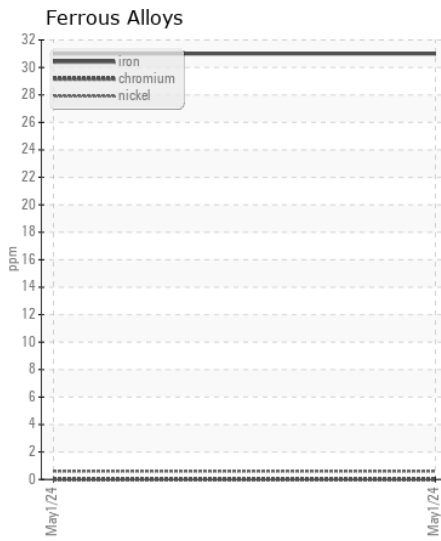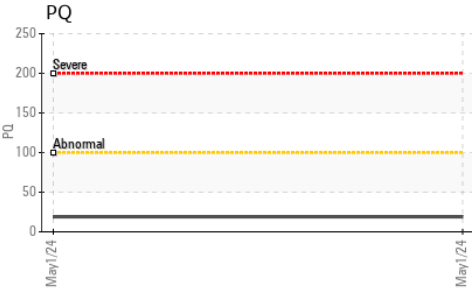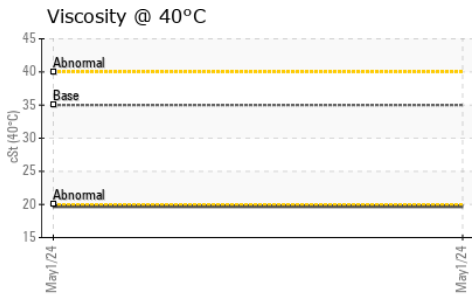

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0206136 **Received** : 10 May 2024  
**Lab Number** : 06175728 **Tested** : 13 May 2024  
**Unique Number** : 11021781 **Diagnosed** : 13 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**MATTHEWS CONSTRUCTION**  
 127 GRAYSON RD  
 ROCK HILL, SC  
 US 29732  
 Contact: Tad Clinton  
 tclinton@matthewsconstructionco.com  
 T: (803)207-5607  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)