



WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 310P DOWN UNDER

Component
Transmission

Fluid
JOHN DEERE HD SynTran (--- GAL)

RECOMMENDATION

We advise that you check for the source of water entry. We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition.

WEAR

All component wear rates are normal.








CONTAMINATION

Appearance is milky. There is a high concentration of water present in the fluid.

FLUID CONDITION

The fluid is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217635	---	---
Sample Date		Client Info		09 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		392	---	---
Filter Age	hrs	Client Info		392	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184	>100	31	---	---
Iron	ppm	ASTM D5185m	>61	39	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	6	---	---
Lead	ppm	ASTM D5185m	>9	6	---	---
Copper	ppm	ASTM D5185m	>100	5	---	---
Tin	ppm	ASTM D5185m	>3	4	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>21	9	---	---
Potassium	ppm	ASTM D5185m	>20	35	---	---
Water	%	ASTM D6304	>0.075	▲ 4.94	---	---
ppm Water	ppm	ASTM D6304	>750	▲ 49400	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	● MILKY	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	▲ 0.2%	---	---
Sodium	ppm	ASTM D5185m	>30	9	---	---
Boron	ppm	ASTM D5185m	168	126	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		8	---	---
Calcium	ppm	ASTM D5185m	33	199	---	---
Phosphorus	ppm	ASTM D5185m	330	306	---	---
Zinc	ppm	ASTM D5185m	0	140	---	---
Sulfur	ppm	ASTM D5185m	980	740	---	---
Visc @ 40°C	cSt	ASTM D445	39	43.4	---	---

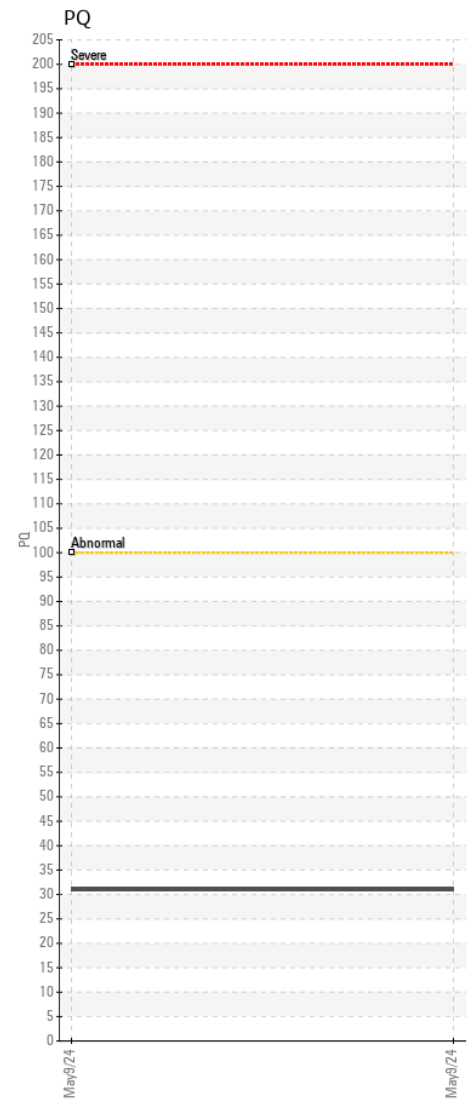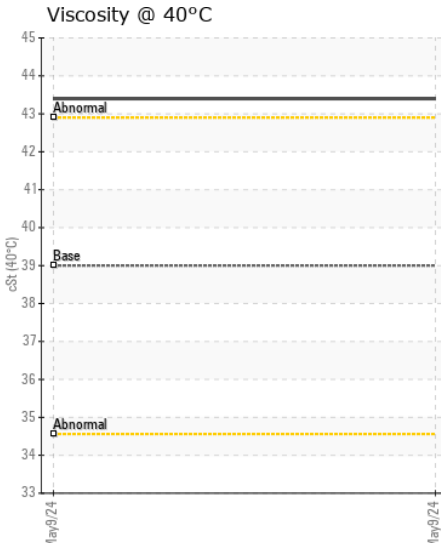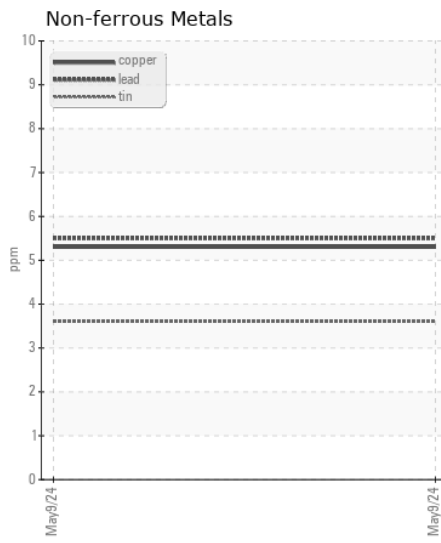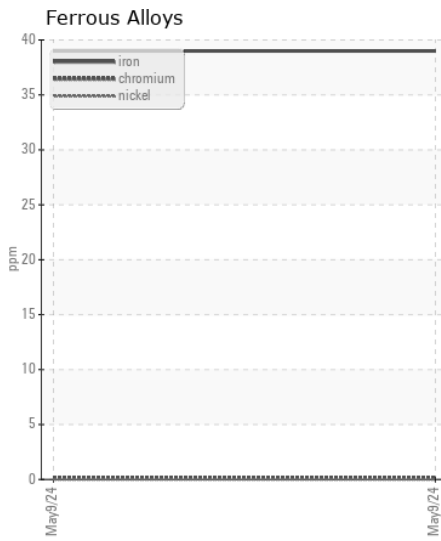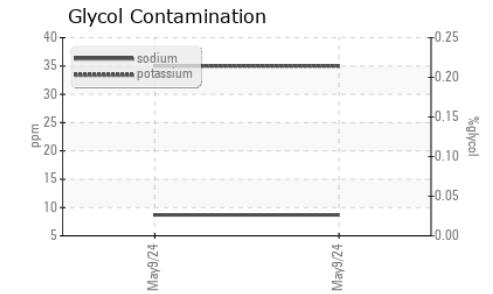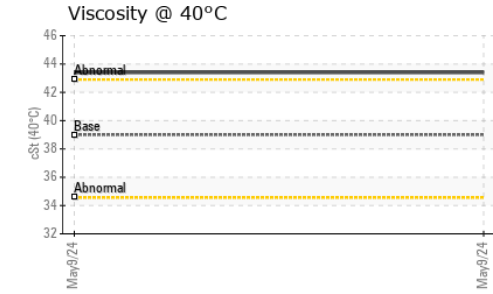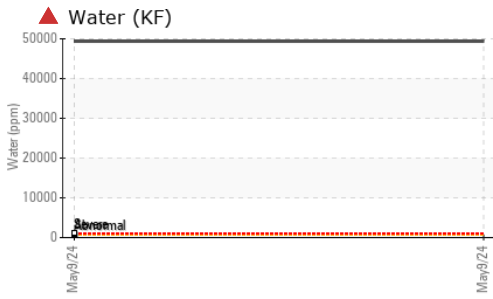

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217635 **Received** : 10 May 2024
Lab Number : 06175739 **Tested** : 14 May 2024
Unique Number : 11021792 **Diagnosed** : 14 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: Glycol, KF, PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111
 Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)