



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 310SL 1T0310SLCJF343241
 Component
Rear Left Planetary
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: one of two samples received with same ID and sampling date.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0170728	---	---
Sample Date		Client Info		08 May 2024	---	---
Machine Age	hrs	Client Info		793	---	---
Oil Age	hrs	Client Info		793	---	---
Filter Age	hrs	Client Info		793	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		237	---	---
Iron	ppm	ASTM D5185m	>500	737	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>75	21	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	17	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	6	2	---	---
Barium	ppm	ASTM D5185m	0	3	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		10	---	---
Magnesium	ppm	ASTM D5185m	145	103	---	---
Calcium	ppm	ASTM D5185m	3570	3477	---	---
Phosphorus	ppm	ASTM D5185m	1290	1143	---	---
Zinc	ppm	ASTM D5185m	1640	1217	---	---
Sulfur	ppm	ASTM D5185m		3977	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	51.7	---	---

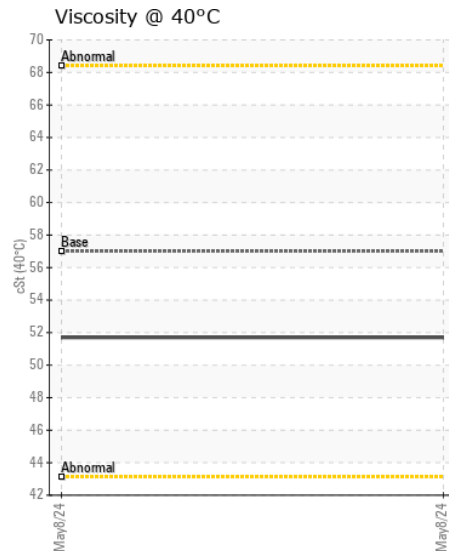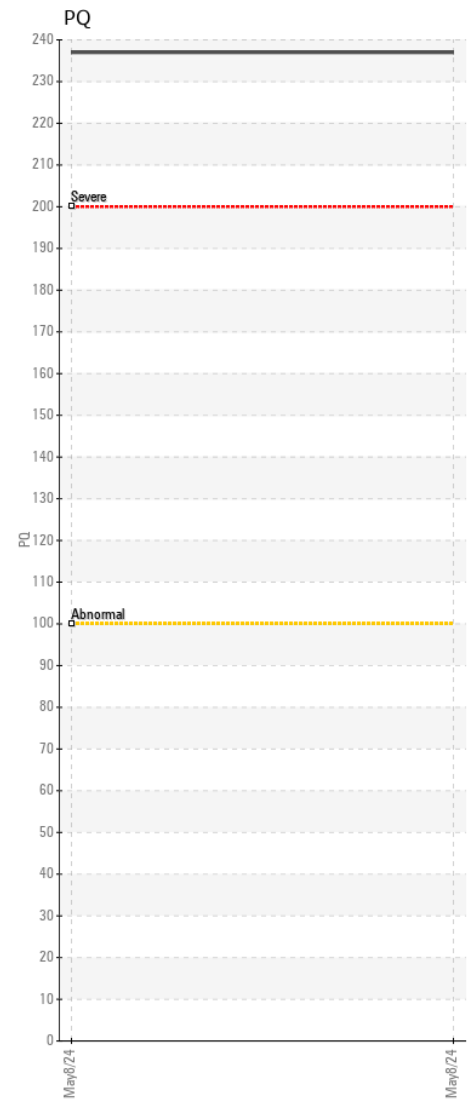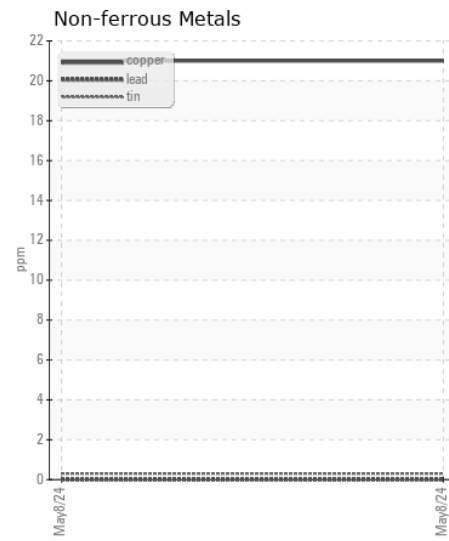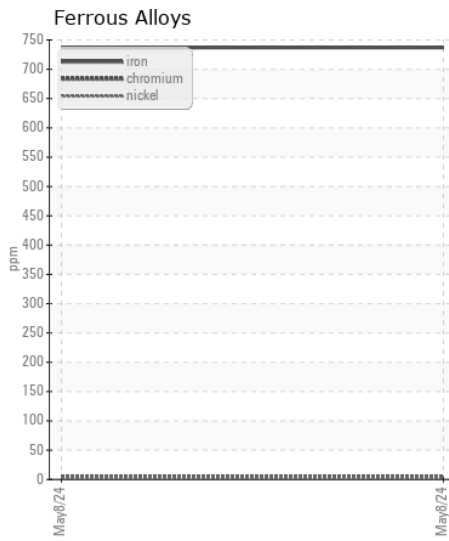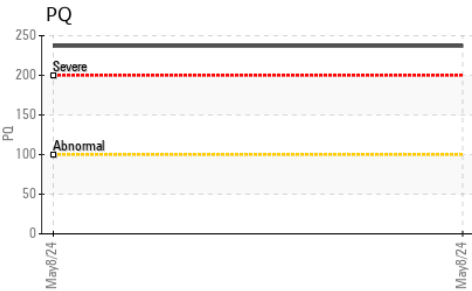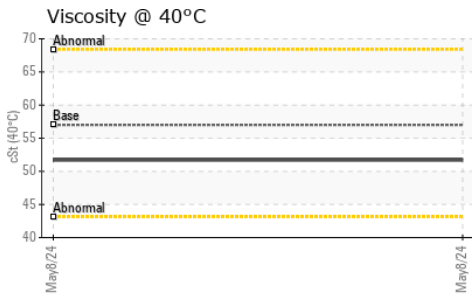

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0170728 **Received** : 10 May 2024
Lab Number : 06175749 **Tested** : 13 May 2024
Unique Number : 11021802 **Diagnosed** : 15 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - RICHLANDS
 450 FRONT ST
 RICHLANDS, VA
 US 24641

Contact: RONNIE MITCHELL
ronnie.mitchell@jre.com

T: (540)380-2011

F: