



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
{UNASSIGNED} [W66773]
 Machine Id
F1E1YN544GATPLA00158
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W66773)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0206027	---	---
Sample Date		Client Info		09 May 2024	---	---
Machine Age	hrs	Client Info		456	---	---
Oil Age	hrs	Client Info		456	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		156	---	---
Iron	ppm	ASTM D5185m	>500	215	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	8	---	---
Copper	ppm	ASTM D5185m	>50	18	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	20	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	6	<1	---	---
Barium	ppm	ASTM D5185m	0	5	---	---
Molybdenum	ppm	ASTM D5185m	0	1	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m	145	97	---	---
Calcium	ppm	ASTM D5185m	3570	3449	---	---
Phosphorus	ppm	ASTM D5185m	1290	1103	---	---
Zinc	ppm	ASTM D5185m	1640	1207	---	---
Sulfur	ppm	ASTM D5185m		4078	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	52.4	---	---

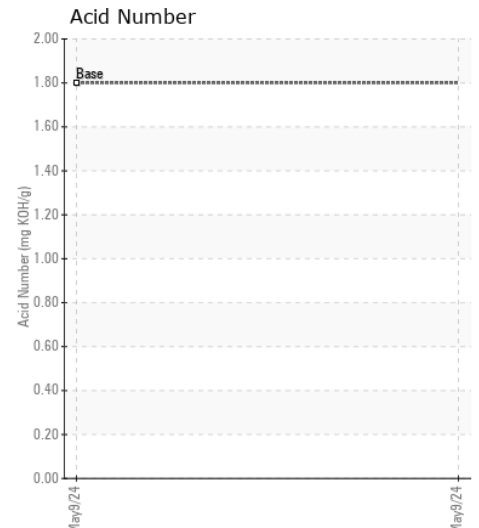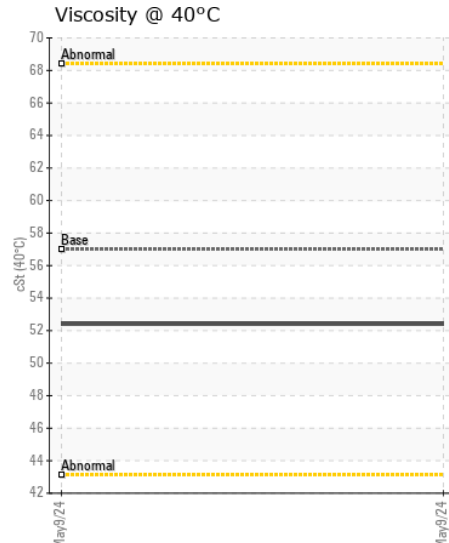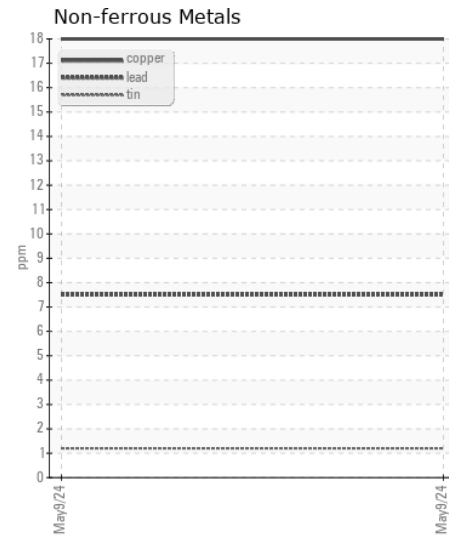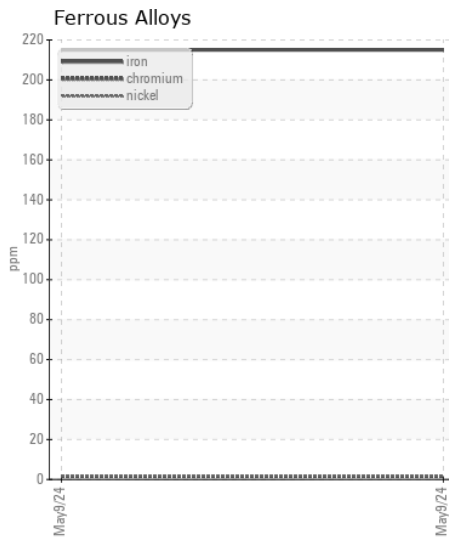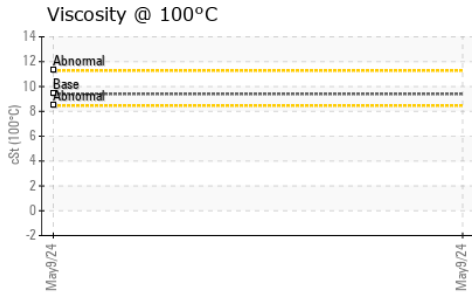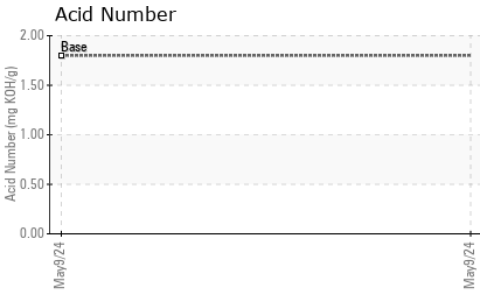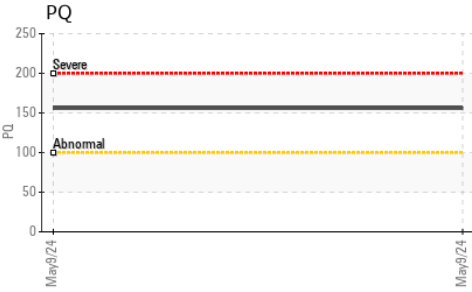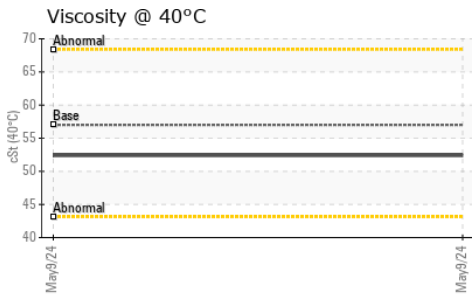

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0206027

Lab Number : 06175766

Unique Number : 11021819

Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, KV40, PQ, PrtCount, SCREEN, TAN Man)

Received : 10 May 2024

Tested : 14 May 2024

Diagnosed : 14 May 2024 - Sean Felton

CARLTON'S BACKHOE

9550 STATESVILLE ROAD

CHARLOTTE, NC

US 28269

Contact: LEO

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)547-0211

F: