



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[46517]

Machine Id

JOHN DEERE 350G 1FF350GXHMF815079

Component

Pump Drive

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (2 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0214571	JR0192269	JR0166322
Sample Date		Client Info		09 May 2024	31 Oct 2023	07 Apr 2023
Machine Age	hrs	Client Info		4478	3502	3460
Oil Age	hrs	Client Info		578	3502	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		28	4	16
Iron	ppm	ASTM D5185m	>151	44	52	33
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	5	5	0
Lead	ppm	ASTM D5185m	>51	<1	0	0
Copper	ppm	ASTM D5185m	>51	<1	<1	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	16	17	10
Potassium	ppm	ASTM D5185m	>20	3	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<1	<1	0
Boron	ppm	ASTM D5185m		298	290	342
Barium	ppm	ASTM D5185m		<1	20	0
Molybdenum	ppm	ASTM D5185m		211	258	263
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		658	778	743
Calcium	ppm	ASTM D5185m		1919	1375	1449
Phosphorus	ppm	ASTM D5185m		1091	941	939
Zinc	ppm	ASTM D5185m		1129	1075	1021
Sulfur	ppm	ASTM D5185m		3549	3456	3548
Visc @ 40°C	cSt	ASTM D445	117	66.0	65.6	76.2

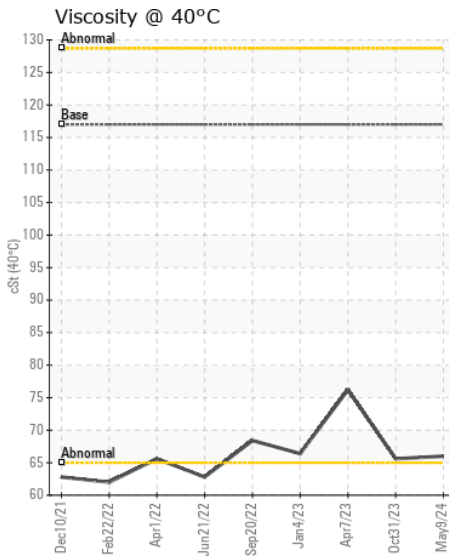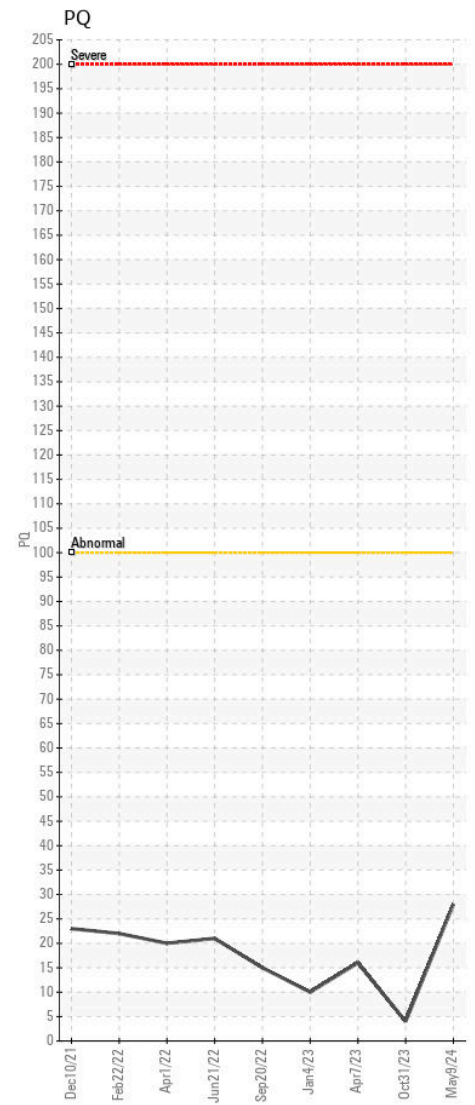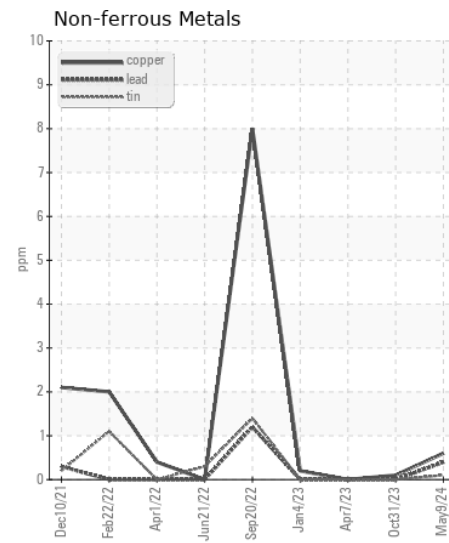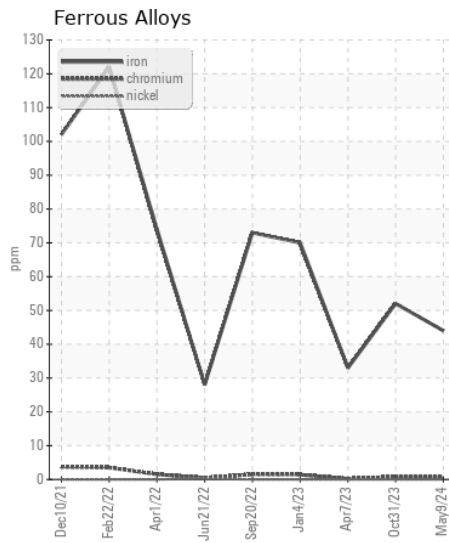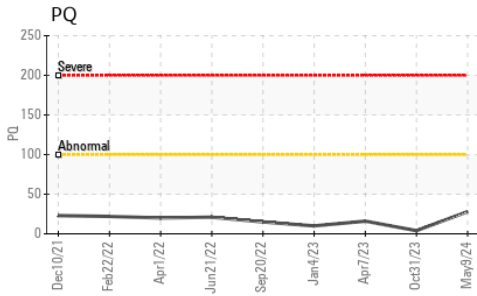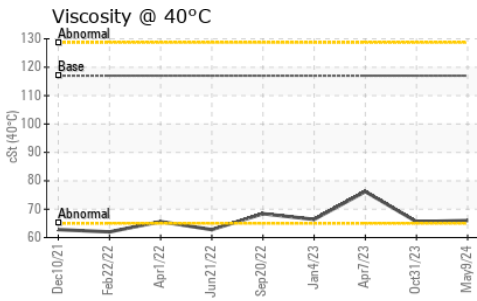

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0214571 **Received** : 10 May 2024
Lab Number : 06175821 **Tested** : 13 May 2024
Unique Number : 11021874 **Diagnosed** : 13 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715