



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

[SWO-071763]

Machine Id

**VOLVO A60H 340039**

Component

**Front Left Final Drive**

Fluid

**GEAR OIL SAE 80W140 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.

### CONTAMINATION

There is no indication of any contamination in the oil.

### FLUID CONDITION










The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP450920</b>	VCP441429	VCP431115
Sample Date		Client Info		<b>07 May 2024</b>	18 Jan 2024	27 Sep 2023
Machine Age	hrs	Client Info		<b>9022</b>	8521	8052
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	N/A	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>500	<b>16</b>	10	25
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>5</b>	0	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	<b>5</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185m		<b>0</b>	2	<1
Boron	ppm	ASTM D5185m	400	<b>156</b>	134	147
Barium	ppm	ASTM D5185m	200	<b>2</b>	<1	0
Molybdenum	ppm	ASTM D5185m	12	<b>8</b>	6	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	12	<b>37</b>	34	14
Calcium	ppm	ASTM D5185m	150	<b>188</b>	100	65
Phosphorus	ppm	ASTM D5185m	1650	<b>960</b>	767	889
Zinc	ppm	ASTM D5185m	125	<b>140</b>	95	22
Sulfur	ppm	ASTM D5185m	22500	<b>22110</b>	17123	19794
Visc @ 40°C	cSt	ASTM D445	263	<b>285</b>	285	272

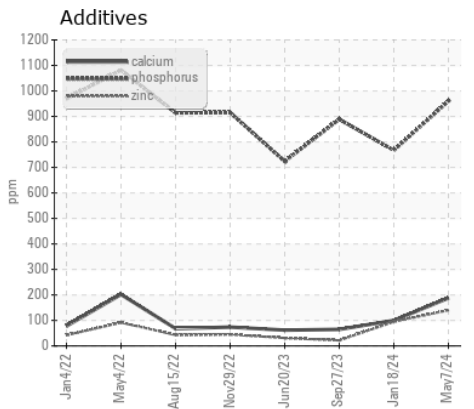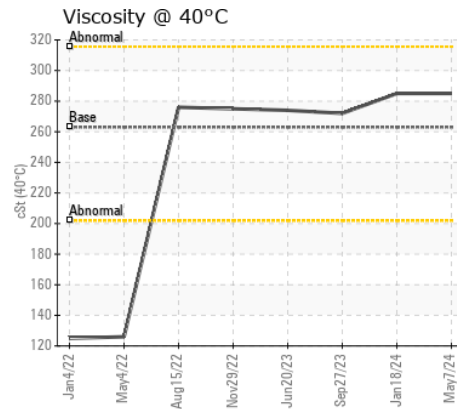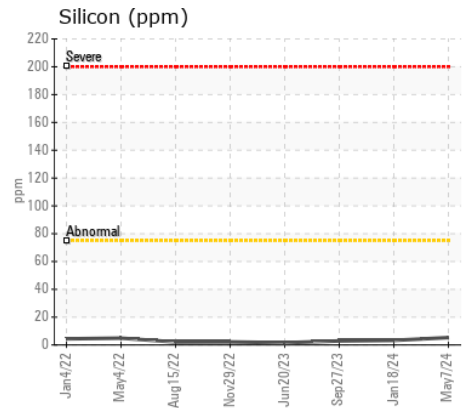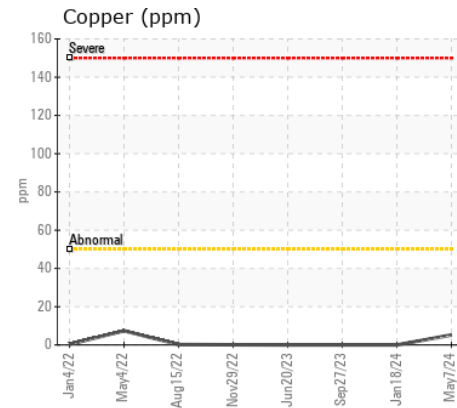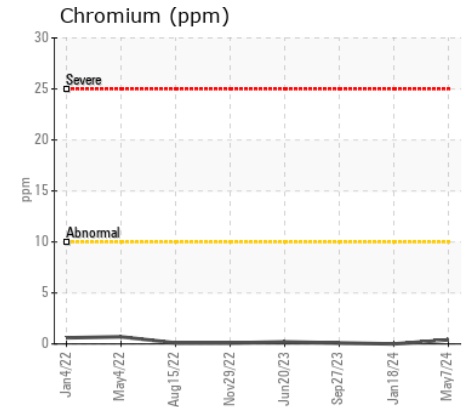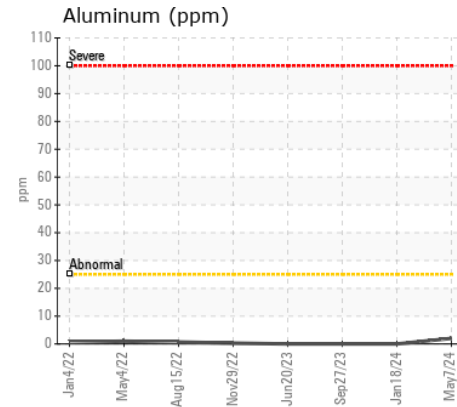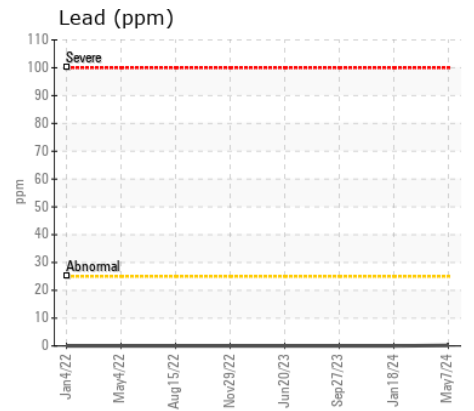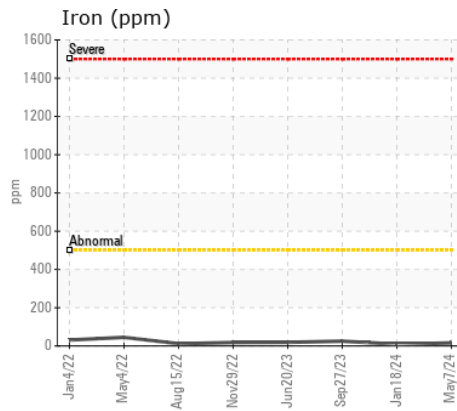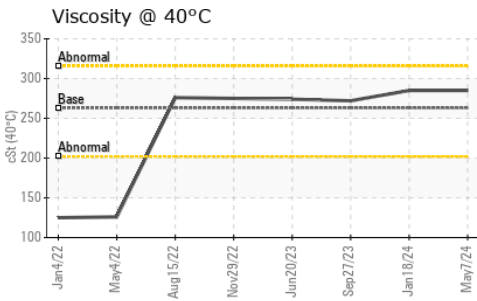

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP450920 **Received** : 10 May 2024  
**Lab Number** : 06175896 **Tested** : 13 May 2024  
**Unique Number** : 11021949 **Diagnosed** : 14 May 2024 - Sean Felton  
**Test Package** : MOB 1

**SAIIA CONSTRUCTION LLC**  
 4400 LEWISBURG RD  
 BIRMINGHAM, AL  
 US 35207  
 Contact: STEPHANI BRITTON  
 sbritton@saiia.com; doug.bogart@wearcheck.com  
 T: (205)943-2268  
 F: (205)943-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)