



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[SWO-071763]

Machine Id

VOLVO A60H 340039

Component

Front Axle

Fluid

GEAR OIL SAE 80W140 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION










The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450918	VCP441423	VCP428989
Sample Date		Client Info		07 May 2024	18 Jan 2024	27 Sep 2023
Machine Age	hrs	Client Info		9022	8521	8052
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Not Changed	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>500	15	9	26
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	2	0	0
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	5	3	3
Potassium	ppm	ASTM D5185m	>20	1	<1	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		0	2	<1
Boron	ppm	ASTM D5185m	400	161	142	151
Barium	ppm	ASTM D5185m	200	2	<1	0
Molybdenum	ppm	ASTM D5185m	12	8	6	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	12	37	44	14
Calcium	ppm	ASTM D5185m	150	137	99	66
Phosphorus	ppm	ASTM D5185m	1650	975	786	921
Zinc	ppm	ASTM D5185m	125	123	95	24
Sulfur	ppm	ASTM D5185m	22500	23506	17578	20712
Visc @ 40°C	cSt	ASTM D445	263	283	285	274

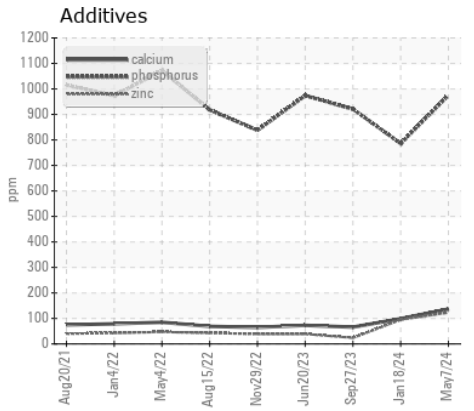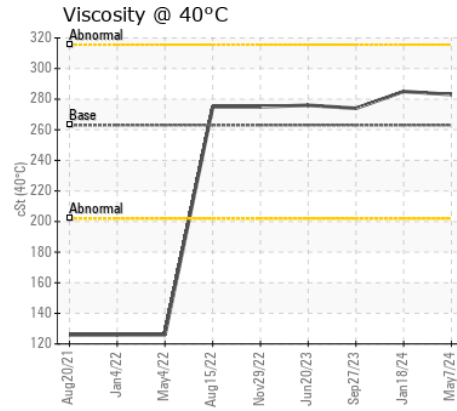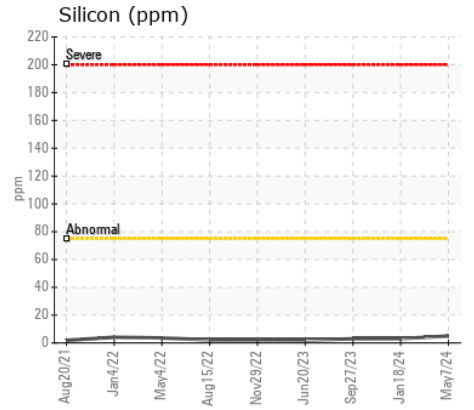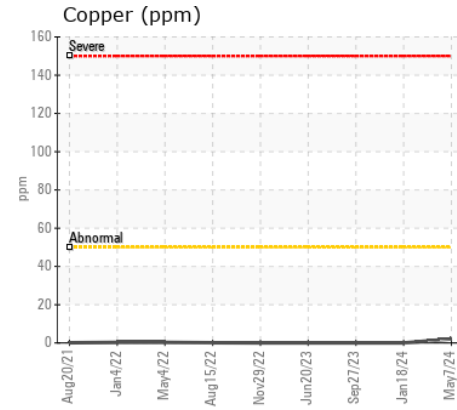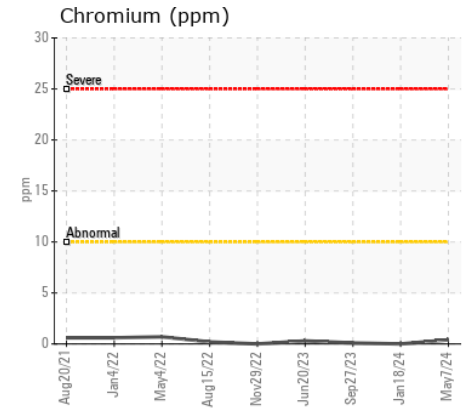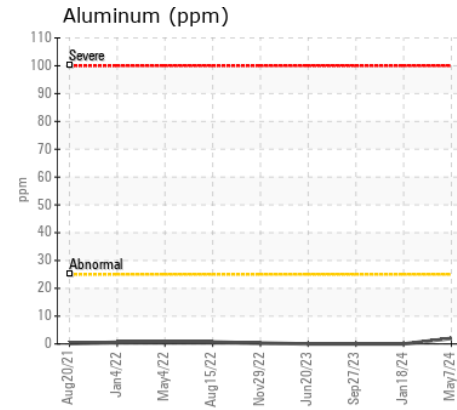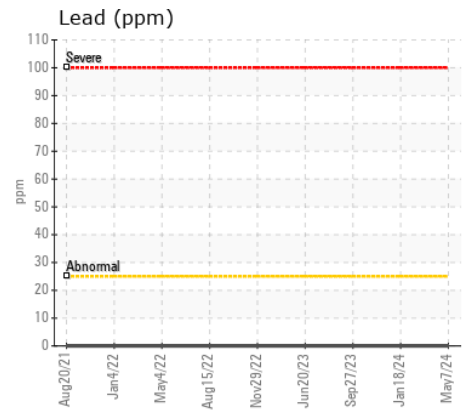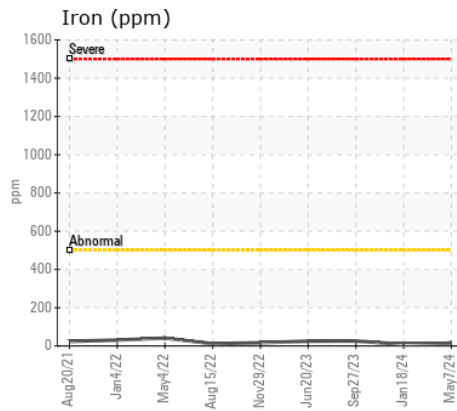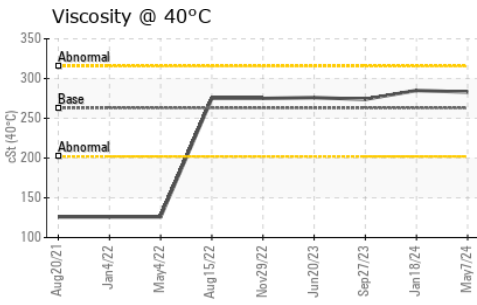

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP450918 **Received** : 10 May 2024
Lab Number : 06175898 **Tested** : 13 May 2024
Unique Number : 11021951 **Diagnosed** : 14 May 2024 - Sean Felton
Test Package : MOB 1

SAIIA CONSTRUCTION LLC
 4400 LEWISBURG RD
 BIRMINGHAM, AL
 US 35207
 Contact: STEPHANI BRITTON
 sbritton@saiia.com;doug.bogart@wearcheck.com
 T: (205)943-2268
 F: (205)943-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)