



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SWO-071763]
 Machine Id
VOLVO A60H 340039
 Component
Bogie/Center Axle
 Fluid
GEAR OIL SAE 80W140 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450914	VCP441431	VCP428977
Sample Date		Client Info		07 May 2024	18 Jan 2024	27 Sep 2023
Machine Age	hrs	Client Info		9022	8521	8052
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	N/A	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	22	9	31
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	0	0
Lead	ppm	ASTM D5185m	>25	<1	0	<1
Copper	ppm	ASTM D5185m	>50	<1	0	<1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	3	2
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	<1
Boron	ppm	ASTM D5185m	400	163	132	145
Barium	ppm	ASTM D5185m	200	2	<1	0
Molybdenum	ppm	ASTM D5185m	12	8	6	2
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	12	39	33	11
Calcium	ppm	ASTM D5185m	150	216	101	76
Phosphorus	ppm	ASTM D5185m	1650	1031	756	916
Zinc	ppm	ASTM D5185m	125	149	95	27
Sulfur	ppm	ASTM D5185m	22500	24032	16823	20119
Visc @ 40°C	cSt	ASTM D445	263	283	283	271

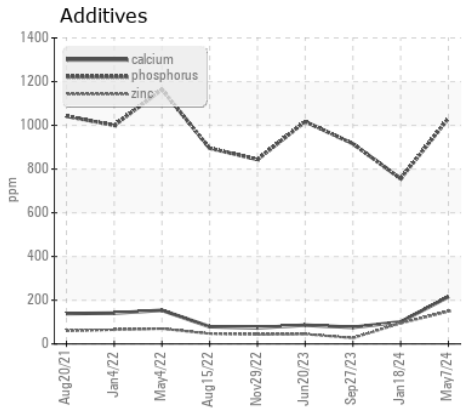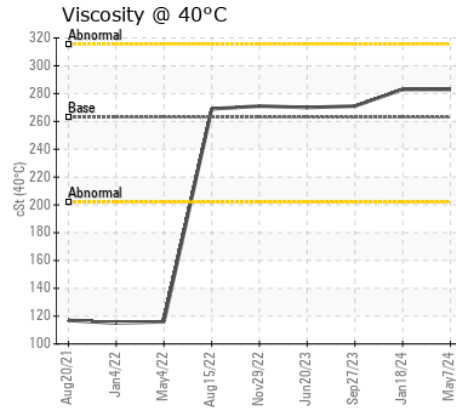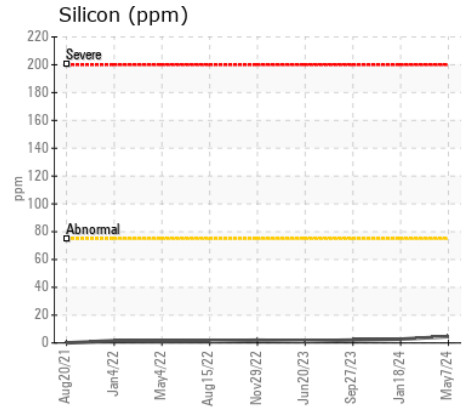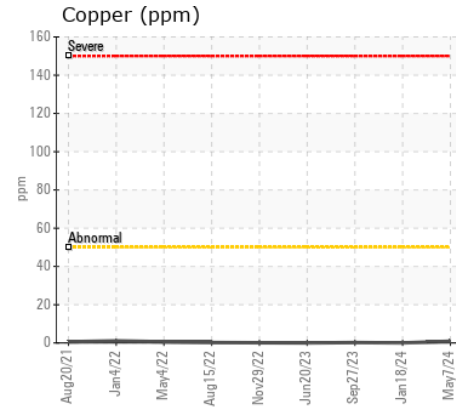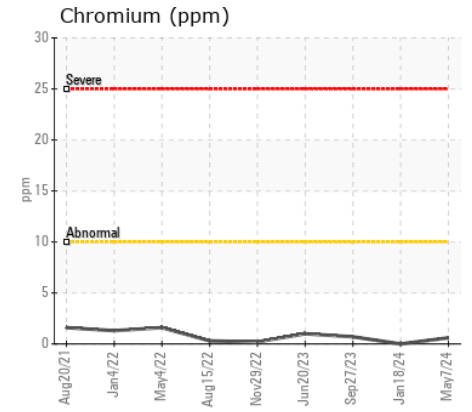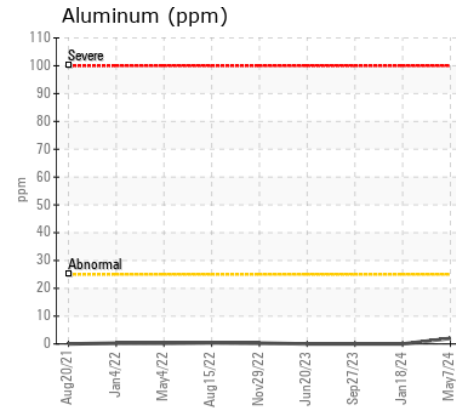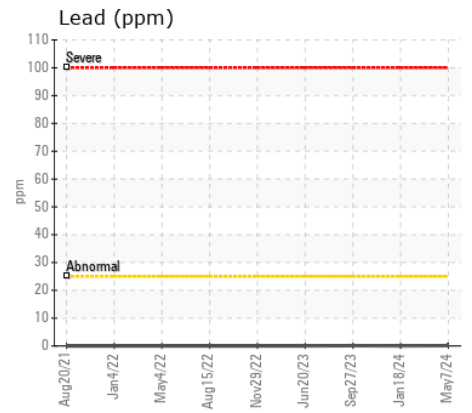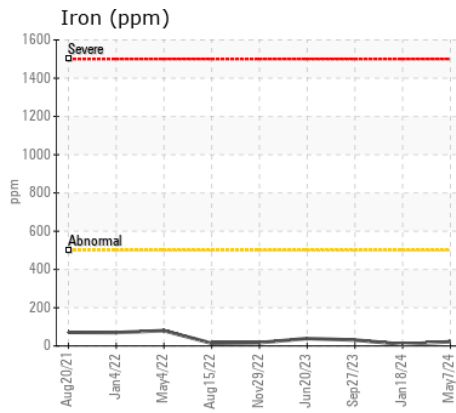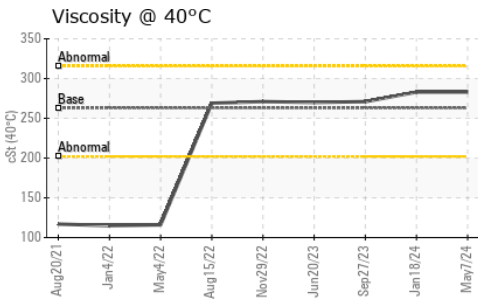

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP450914
Lab Number : 06175901
Unique Number : 11021954
Test Package : MOB 1

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 14 May 2024 - Sean Felton

SAIIA CONSTRUCTION LLC
 4400 LEWISBURG RD
 BIRMINGHAM, AL
 US 35207

Contact: STEPHANI BRITTON
 sbritton@saiia.com; doug.bogart@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (205)943-2268
 F: (205)943-2269