



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**LB EDGIN**  
Machine Id  
[LB EDGIN] 001 601230-1  
Component  
Port Main Engine  
Fluid  
CHEVRON DELO 400 LE 15W40 (21 GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0055208</b>	MW0054731	MW0061676
Sample Date		Client Info		<b>05 May 2024</b>	01 Nov 2023	01 Oct 2023
Machine Age	hrs	Client Info		<b>5352</b>	2512	4272
Oil Age	hrs	Client Info		<b>298</b>	0	1200
Filter Age	hrs	Client Info		<b>298</b>	0	1200
Oil Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>6</b>	8	12
Chromium	ppm	ASTM D5185m	>8	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	5	3
Lead	ppm	ASTM D5185m	>18	<b>2</b>	0	3
Copper	ppm	ASTM D5185m	>80	<b>2</b>	<1	10
Tin	ppm	ASTM D5185m	>14	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>6</b>	5	7
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	0
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	▲ 3.9
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	8.8	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	20.2	24.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>&lt;1</b>	<1	1
Boron	ppm	ASTM D5185m		<b>421</b>	3	201
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>129</b>	4	117
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>720</b>	11	624
Calcium	ppm	ASTM D5185m		<b>1665</b>	3005	1423
Phosphorus	ppm	ASTM D5185m	1200	<b>768</b>	7	680
Zinc	ppm	ASTM D5185m	1300	<b>950</b>	0	782
Sulfur	ppm	ASTM D5185m	3200	<b>3209</b>	4221	2515
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	13.4	18.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	<b>10.44</b>	10.4	8.96
Visc @ 100°C	cSt	ASTM D445	15.7	<b>12.7</b>	14.0	▲ 11.8


**FT-IR (Direct Trend)**

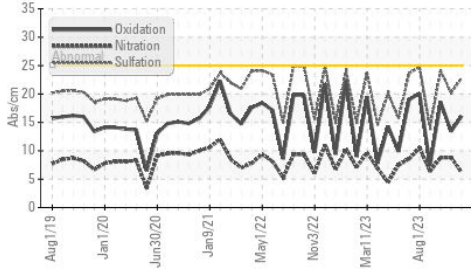


**Base Number**

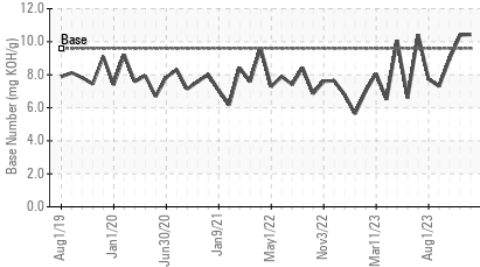


**Viscosity @ 100°C**

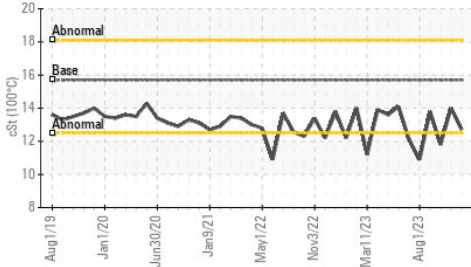


**Ferrous Alloys**

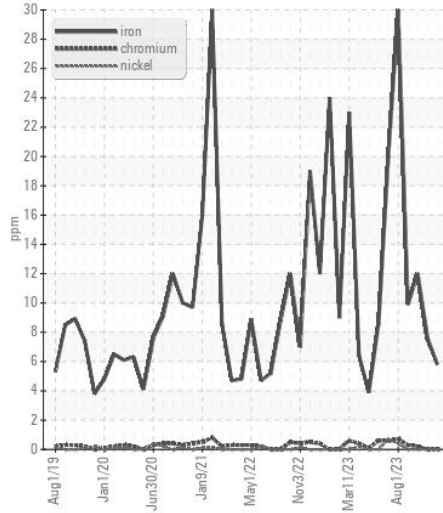


**Non-ferrous Metals**

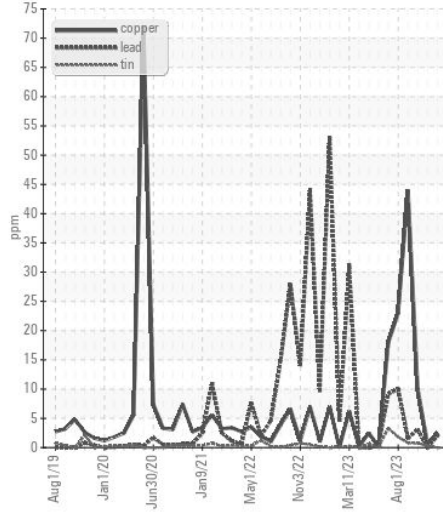

**Viscosity @ 100°C**

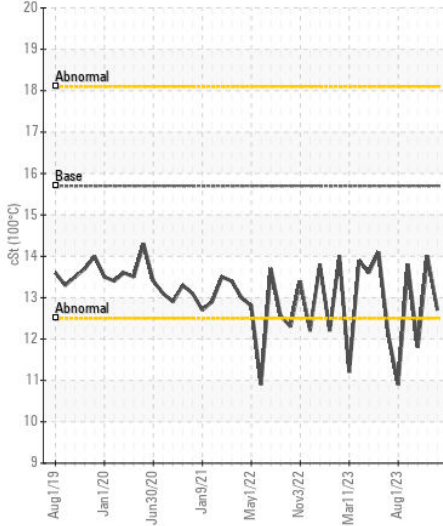

**Base Number**

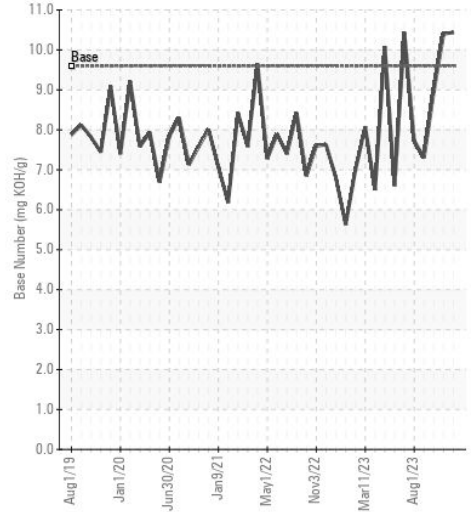

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0055208

**Lab Number** : 06176241

**Unique Number** : 11022294

**Test Package** : MAR 2

**Received** : 10 May 2024

**Tested** : 13 May 2024

**Diagnosed** : 13 May 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: JOHNNY HINES

johnny.hines@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)