



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 501D
Component
Diesel Engine
Fluid
VALVOLINE ALLFLEET 15W40 (18 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RW0005097	RW0004600	RW0004601
Sample Date		Client Info		22 Apr 2024	25 Jan 2024	31 Oct 2023
Machine Age	hrs	Client Info		14868	14260	13710
Oil Age	hrs	Client Info		608	520	546
Filter Age	hrs	Client Info		608	520	546
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	10	14
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	2
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	2	<1	3
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	3	4
Potassium	ppm	ASTM D5185m	>20	1	1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.7	1.3	1.9
Nitration	Abs/cm	*ASTM D7624	>20	9.2	8.9	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	21.3	23.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	1	1
Boron	ppm	ASTM D5185m	360	<1	3	20
Barium	ppm	ASTM D5185m	0.2	0	0	0
Molybdenum	ppm	ASTM D5185m	95	2	6	54
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	284	11	17	38
Calcium	ppm	ASTM D5185m	2592	2694	2409	2269
Phosphorus	ppm	ASTM D5185m	1148	956	973	856
Zinc	ppm	ASTM D5185m	1372	1217	1190	1183
Sulfur	ppm	ASTM D5185m	5428	4300	3796	4123
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	13.1	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	6.27	6.91	7.13
Visc @ 100°C	cSt	ASTM D445	15.0	14.6	14.7	15.0

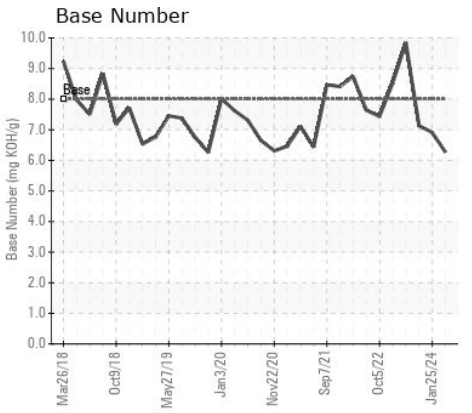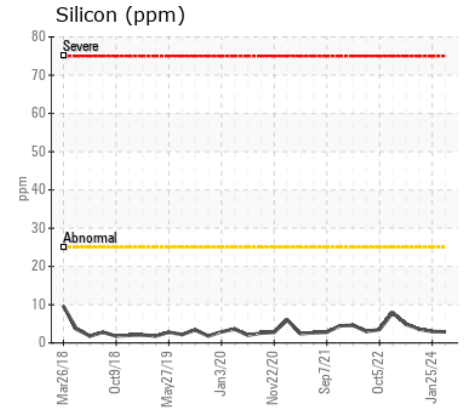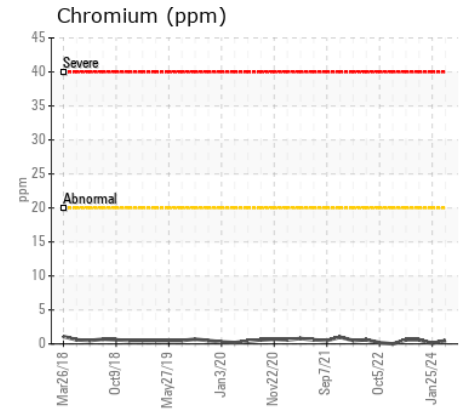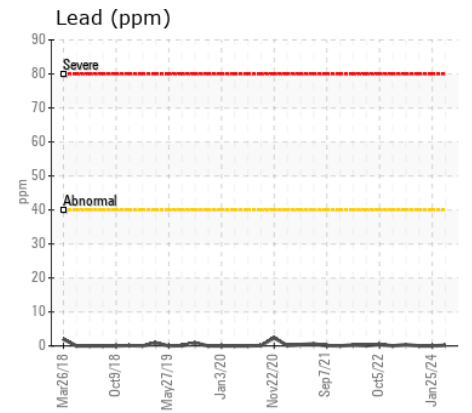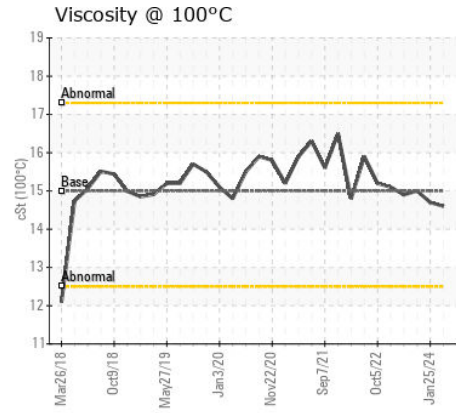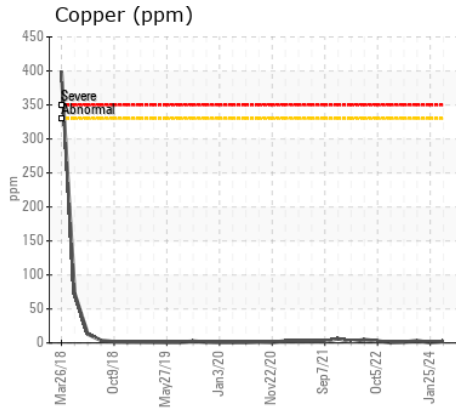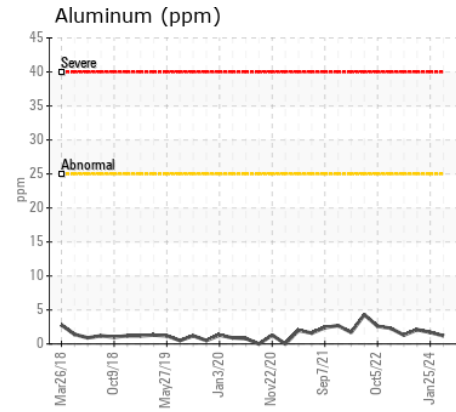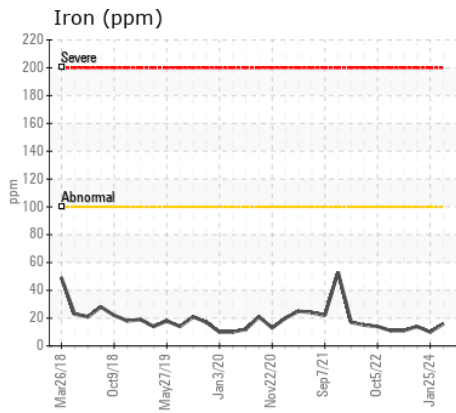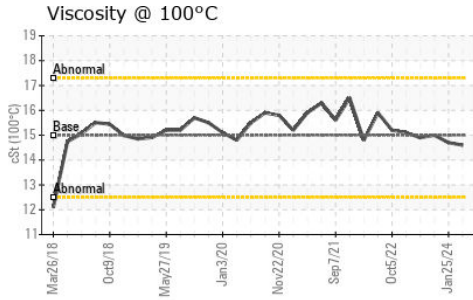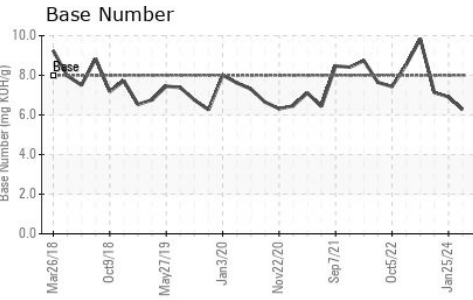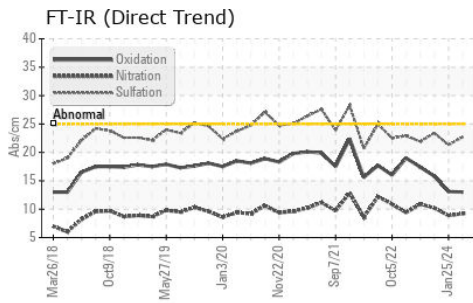

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0005097
Lab Number : 06176254
Unique Number : 11022307
Test Package : MOB 2

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 13 May 2024 - Wes Davis

CORDES FOREST
 PO BOX 277
 HILLMAN, MI
 US 49746

Contact: DAVE HORNBACHER
 davehornbacher@yahoo.com

T: (989)884-2119
 F: (989)742-4845

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)