
WEAR CONTAMINATION **FLUID CONDITION**

NORMAL NORMAL **NORMAL**

Machine Id

C0004 - WEST TROLLEY Component Gearbox Eluid

GEAR OIL LS 80W90 (GAL)							
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL LS 80W90. Please confirm. Please specify the component make and model with your next sample.	Sample Number		Client Info		DC0033211	DC0029159	
	Sample Date		Client Info		02 Apr 2024	30 Aug 2023	
	Machine Age	hrs	Client Info		0	0	
	Oil Age	hrs	Client Info		0	0	
	Filter Age	hrs	Client Info		0	0	
	Oil Changed		Client Info		N/A	Not Changd	
	Filter Changed		Client Info		N/A	Not Changd	
	Sample Status				NORMAL	NORMAL	
14/E 4 B							
WEAR	Iron	ppm	ASTM D5185m	>200	1	12	
All component wear rates are normal.	Chromium	ppm	ASTM D5185m	>10	0	<1	
	Nickel	ppm	ASTM D5185m	>10	0	1	
	Titanium	ppm	ASTM D5185m		0	0	
	Silver	ppm	ASTM D5185m		0	0	
	Aluminum	ppm	ASTM D5185m	>25	0	0	
	Lead	ppm	ASTM D5185m	>50	0	0	
	Copper	ppm	ASTM D5185m	>200	4	6	
	Tin	ppm	ASTM D5185m	>10	0	2	
	Vanadium	ppm	ASTM D5185m		0	0	
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
CONTAMINATION	Silicon	ppm	ASTM D5185m	>50	3	6	
There is no indication of any contamination in the oil.	Potassium	ppm	ASTM D5185m	>20	1	1	
	Water		WC Method	>0.2	NEG	NEG	
	Silt	scalar	*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
	Appearance	scalar	*Visual	NORML	NORML	NORML	
	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	
FLUID CONDITION	Sodium	ppm	ASTM D5185m		2	2	
The condition of the oil is acceptable for the time in service.	Boron	ppm	ASTM D5185m	150	25	2	
The condition of the on is acceptable for the time in service.	Barium	ppm	ASTM D5185m		0	0	
	Molybdenum	ppm	ASTM D5185m		0	0	
	Manganese	ppm	ASTM D5185m		0	<1	
	Magnesium	ppm	ASTM D5185m	10	0	3	
	Calcium	ppm	ASTM D5185m	70	244	5	
	Phosphorus	ppm	ASTM D5185m	2000	349	548	
	Zinc	ppm	ASTM D5185m		81	0	
	Sulfur	ppm		20000	19242	1449	
	Visc @ 40°C	cSt	ASTM D445		215	503	
Report Id: CRAASHMA [WUSCAR] 06176312 (Generated: 05/14/2024 14:52:47) Rev: 1	G - 3					N WILDE - C	RAASHM.

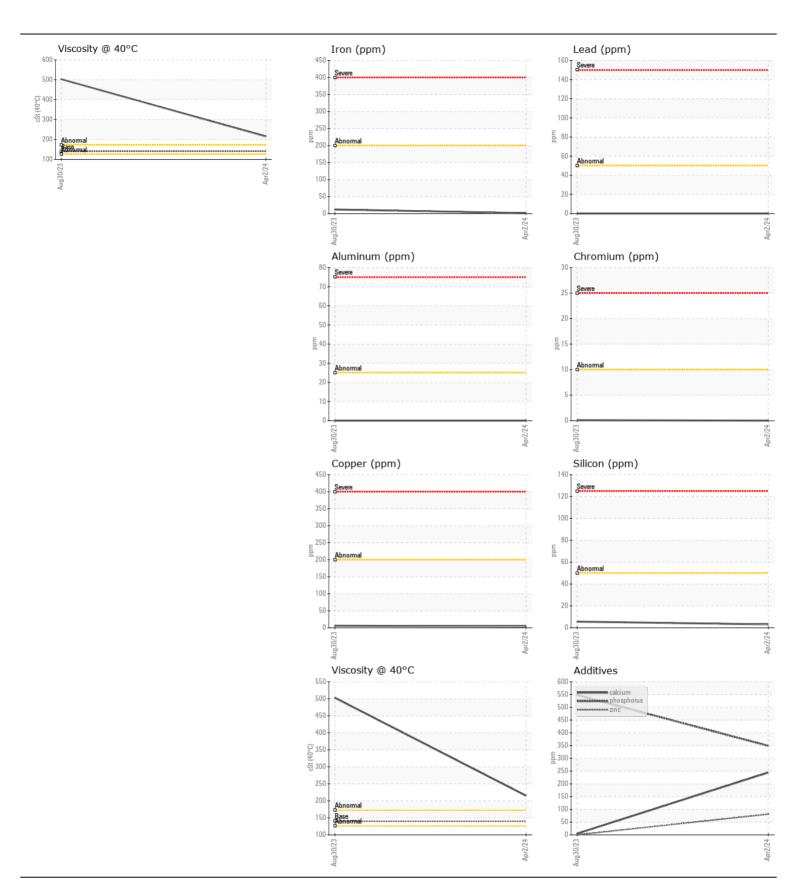



Certificate L2367

Laboratory Sample No.

: DC0033211 Lab Number : 06176312 Unique Number : 11022365 Test Package : MOB 1

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 May 2024 **Tested**

: 14 May 2024 Diagnosed : 14 May 2024 - Wes Davis

CRANEWORKS INC - MID-ATLANTIC 11089 LEADBETTER ROAD

ASHLAND, VA US 23005

Contact: JASON WILDE jcwilde@vacraneworks.com T:

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: