



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD JJ09
Component
Gasoline Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0007904	LW0008633	---
Sample Date		Client Info		23 Apr 2024	27 Jan 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	18	5	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>40	2	2	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>155	4	2	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	4	3	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Fuel		WC Method	>4.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844		0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	12.7	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	18.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	0	0	---
Boron	ppm	ASTM D5185m		1	1	---
Barium	ppm	ASTM D5185m		2	<1	---
Molybdenum	ppm	ASTM D5185m		59	57	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		859	810	---
Calcium	ppm	ASTM D5185m		989	965	---
Phosphorus	ppm	ASTM D5185m		998	938	---
Zinc	ppm	ASTM D5185m		1137	1093	---
Sulfur	ppm	ASTM D5185m		2993	2883	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.2	17.1	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.2	8.6	---
Visc @ 100°C	cSt	ASTM D445		12.1	11.9	---

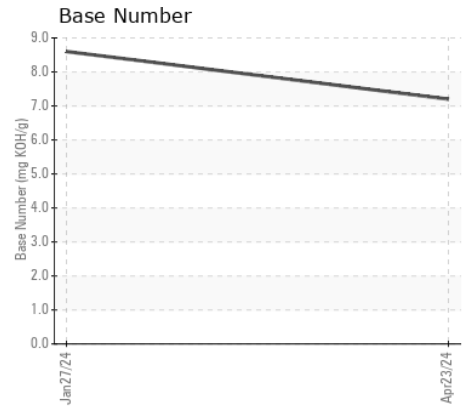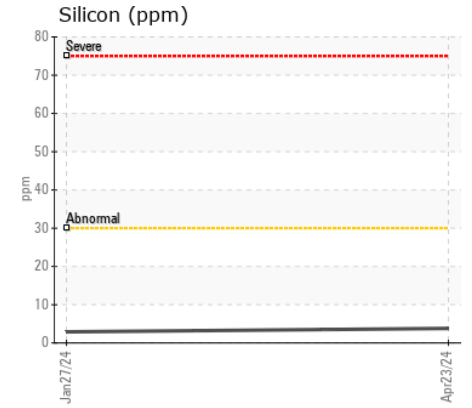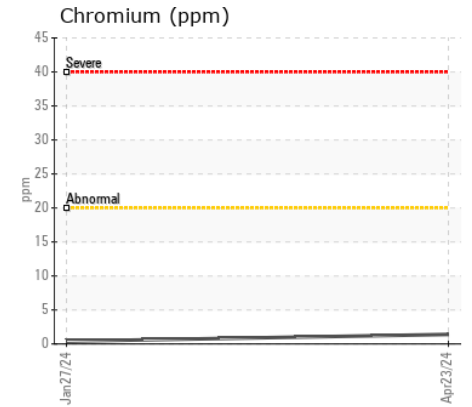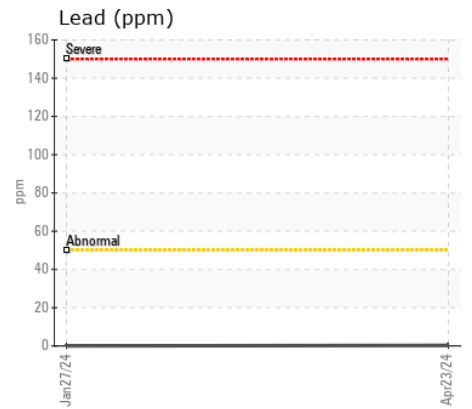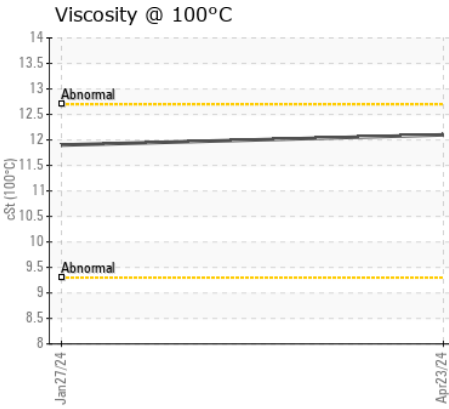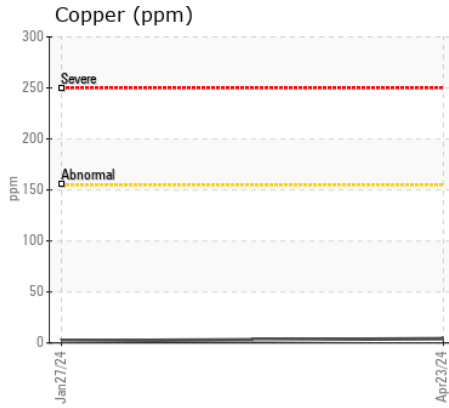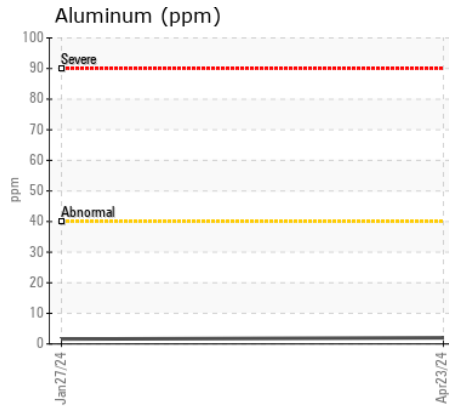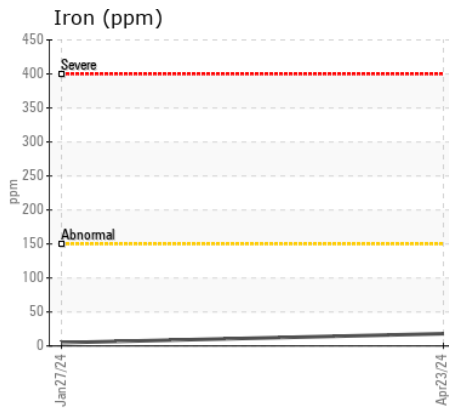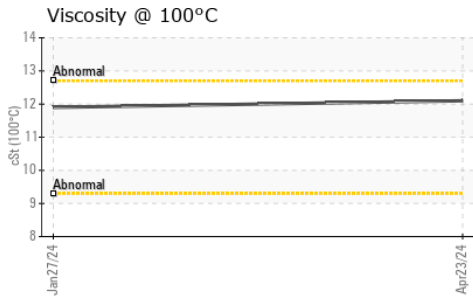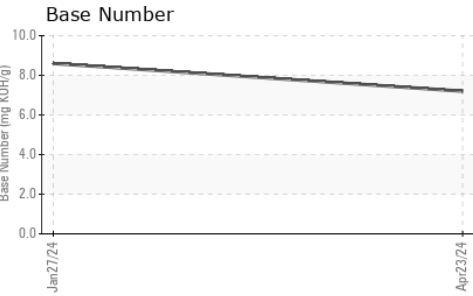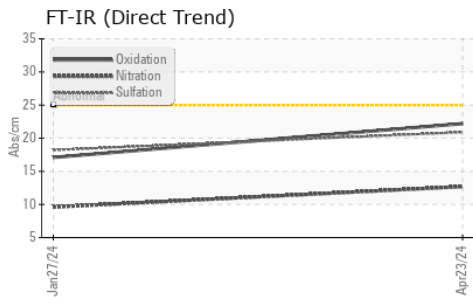

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0007904 **Received** : 10 May 2024
Lab Number : 06176457 **Tested** : 13 May 2024
Unique Number : 11022510 **Diagnosed** : 13 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LRS - NILES
 33541 REUM RD
 NILES, MI
 US 49120

Contact: JOHN HUGHES
 johnh@michianarecyclinganddisposal.com

T: (269)684-0900 X:124

F: