



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Lumberton NC
Machine Id
KENWORTH TRUCK 135
Component
Diesel Engine
Fluid
GUARD PLUS 15W40 CK9 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0917083	---	---
Sample Date		Client Info		08 May 2024	---	---
Machine Age	mls	Client Info		156971	---	---
Oil Age	mls	Client Info		6383	---	---
Filter Age	mls	Client Info		6383	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	19	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	3	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		13	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		94	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		148	---	---
Calcium	ppm	ASTM D5185m		2217	---	---
Phosphorus	ppm	ASTM D5185m		1179	---	---
Zinc	ppm	ASTM D5185m		1300	---	---
Sulfur	ppm	ASTM D5185m		4037	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.0	---	---
Visc @ 100°C	cSt	ASTM D445		14.7	---	---

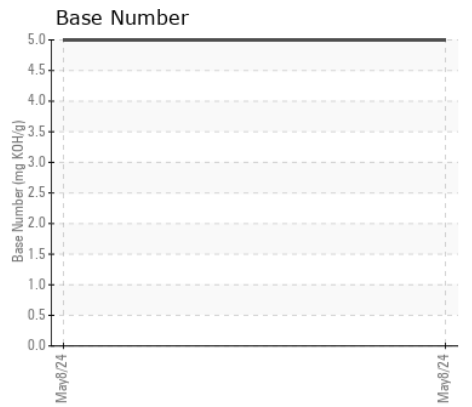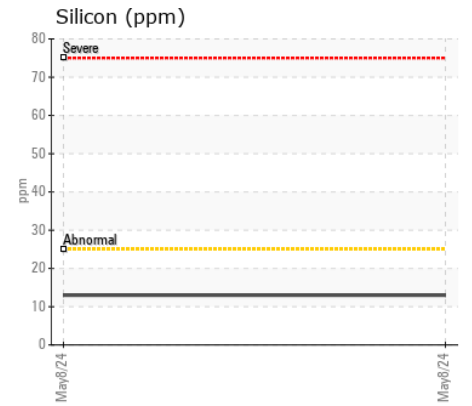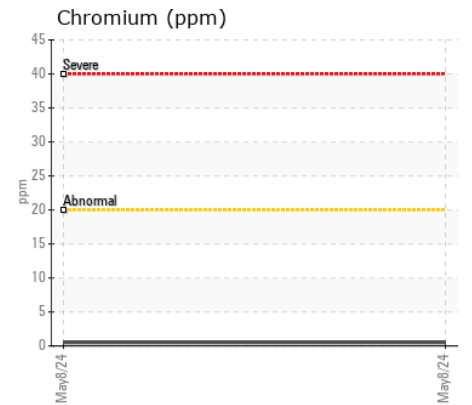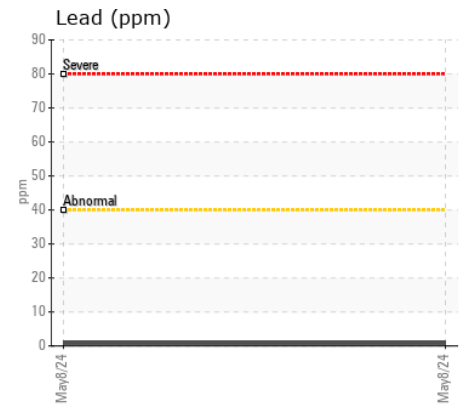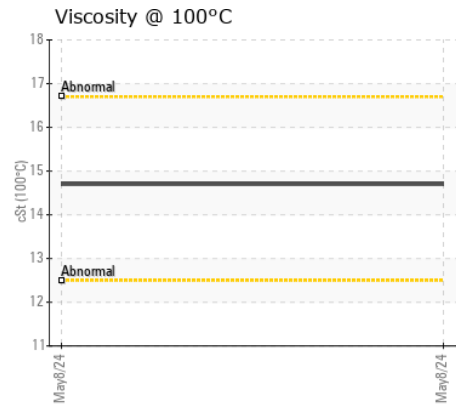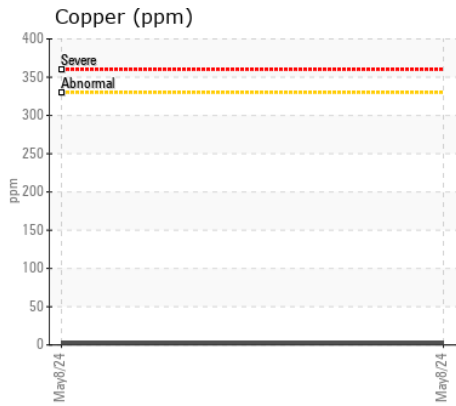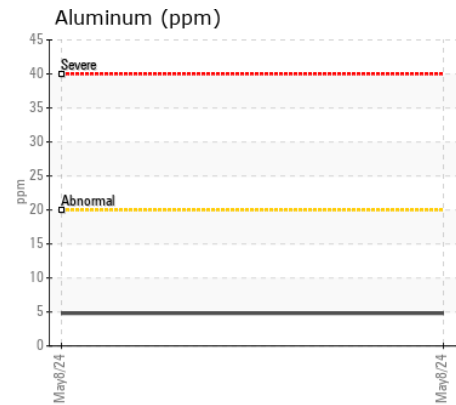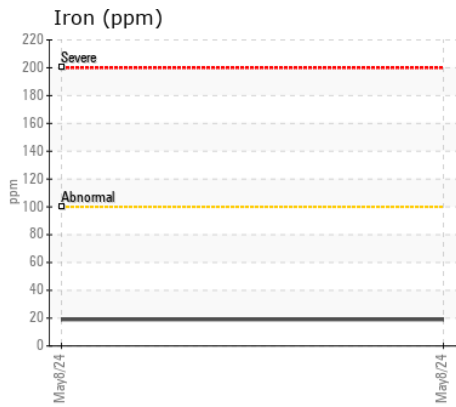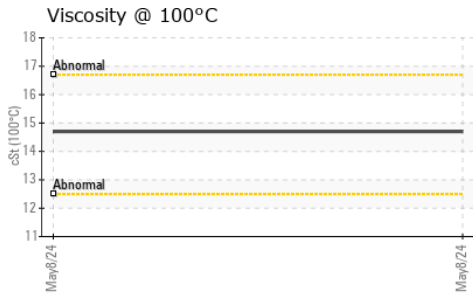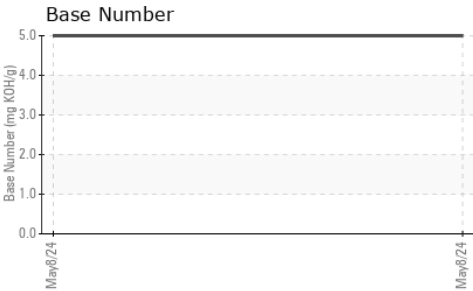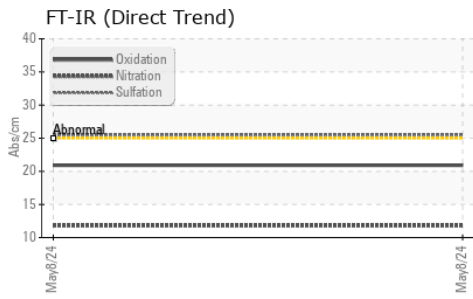

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0917083
Lab Number : 06176552
Unique Number : 11022605
Test Package : MOB 1 (Additional Tests: TBN)

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 13 May 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

WOLFPACK TRANSPORTATION
 664 BEN GREEN INDUSTRIAL PARK DRIVE
 ELIZABETHTOWN, NC
 US 28337

Contact: WESLEY SASSER
 wesley.sasser@wolfpacktransportation.com

T: (910)874-4046

F: