



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Machine Id  
**JOHN DEERE JOHN DEERE 7210**  
 Component  
**Diesel Engine**  
 Fluid  
**DURALENE Dura-Max 15W40 (--- QTS)**

## RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033566	---	---
Sample Date		Client Info		01 Apr 2024	---	---
Machine Age	hrs	Client Info		8789	---	---
Oil Age	hrs	Client Info		589	---	---
Filter Age	hrs	Client Info		589	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				SEVERE	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	39	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	2	---	---
Lead	ppm	ASTM D5185m	>26	2	---	---
Copper	ppm	ASTM D5185m	>26	1	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION













There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>22	8	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel	%	ASTM D3524	>2.1	▲ 10.4	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>31	0	---	---
Boron	ppm	ASTM D5185m		3	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		66	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		813	---	---
Calcium	ppm	ASTM D5185m		1168	---	---
Phosphorus	ppm	ASTM D5185m		1013	---	---
Zinc	ppm	ASTM D5185m		1159	---	---
Sulfur	ppm	ASTM D5185m		3109	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.8	---	---
Visc @ 100°C	cSt	ASTM D445		▲ 11.9	---	---

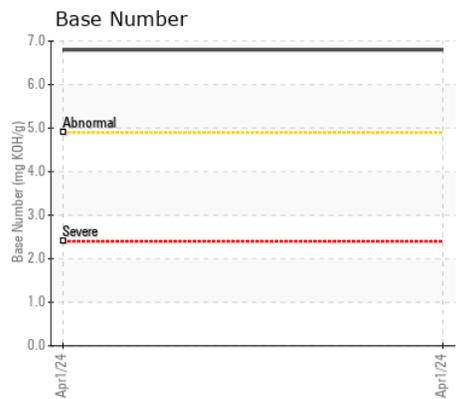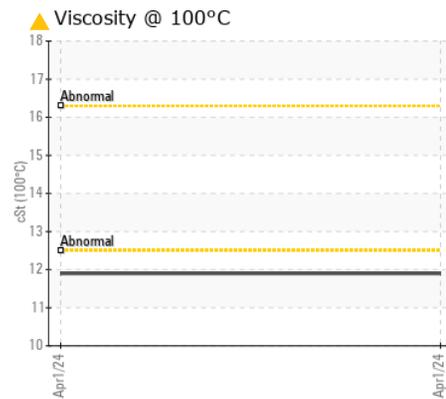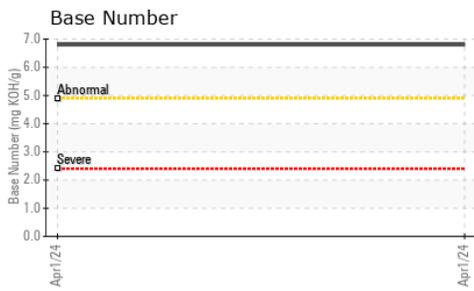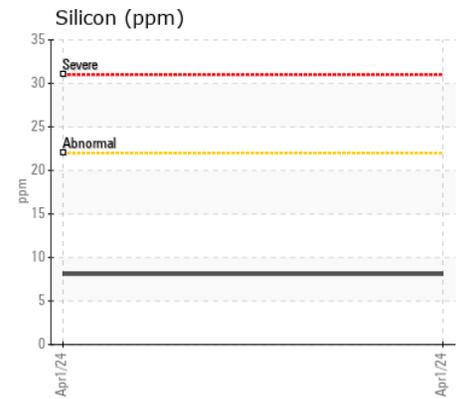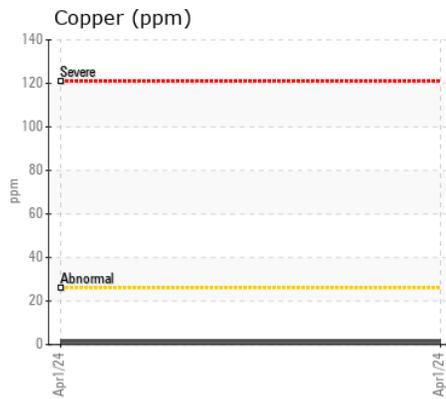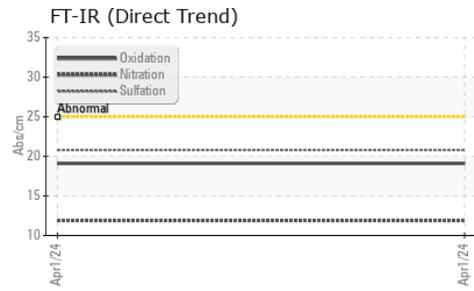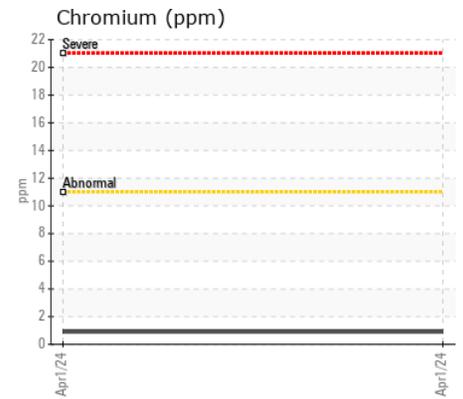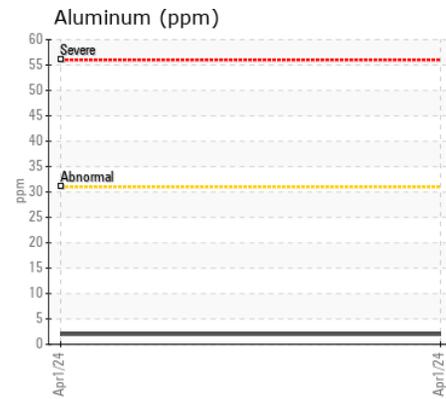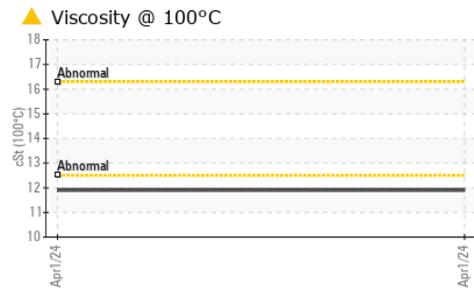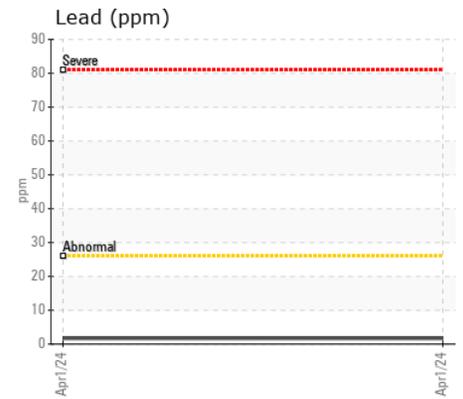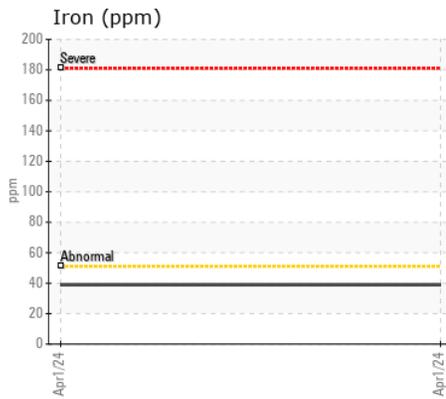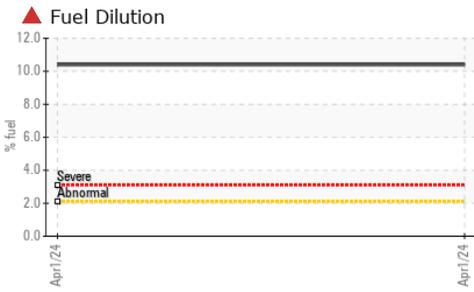

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0033566 **Received** : 10 May 2024  
**Lab Number** : 06176571 **Tested** : 15 May 2024  
**Unique Number** : 11022624 **Diagnosed** : 15 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel, TBN )

**MERCER VU FARMS**  
 12275 MT PLEASANT RD  
 MERCERSBURG, PA  
 US 17236  
 Contact: RYAN LEASURE  
 ryanleasure@yahoo.com  
 T: (717)404-5913  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)