



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
E BRONSON INGRAM
Machine Id
[E BRONSON INGRAM] 008 571430-8
Component
Starboard Genset
Fluid
CHEVRON DELO 400 XLE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0061713	MW0062908	MW0062916
Sample Date		Client Info		20 Apr 2024	13 Mar 2024	12 Feb 2024
Machine Age	hrs	Client Info		14659	14185	13795
Oil Age	hrs	Client Info		0	390	400
Filter Age	hrs	Client Info		0	390	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	15	6	8
Chromium	ppm	ASTM D5185m	>4	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		1	<1	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>12	8	3	4
Lead	ppm	ASTM D5185m	>17	<1	0	1
Copper	ppm	ASTM D5185m	>70	<1	4	<1
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	5	6
Potassium	ppm	ASTM D5185m	>20	3	5	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.4	7.6	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.6	23.6	23.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	0
Boron	ppm	ASTM D5185m		612	306	413
Barium	ppm	ASTM D5185m		3	<1	2
Molybdenum	ppm	ASTM D5185m		217	115	134
Manganese	ppm	ASTM D5185m		3	<1	1
Magnesium	ppm	ASTM D5185m		1121	643	669
Calcium	ppm	ASTM D5185m		2803	1658	1870
Phosphorus	ppm	ASTM D5185m	760	1292	723	806
Zinc	ppm	ASTM D5185m	830	1493	830	944
Sulfur	ppm	ASTM D5185m	2770	4918	2904	2890
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.5	18.2	18.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	9.4	9.4	9.3
Visc @ 100°C	cSt	ASTM D445	14.9	13.7	13.4	13.3

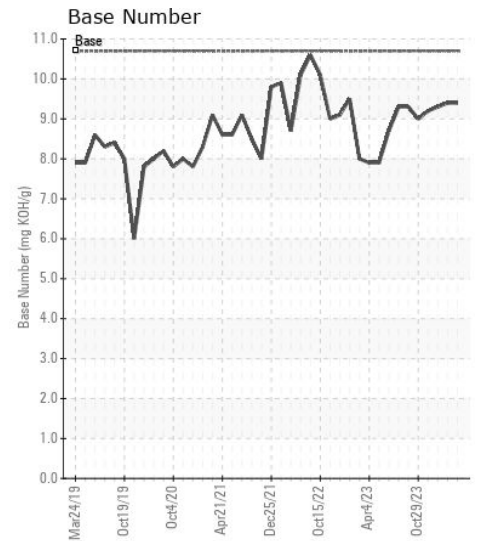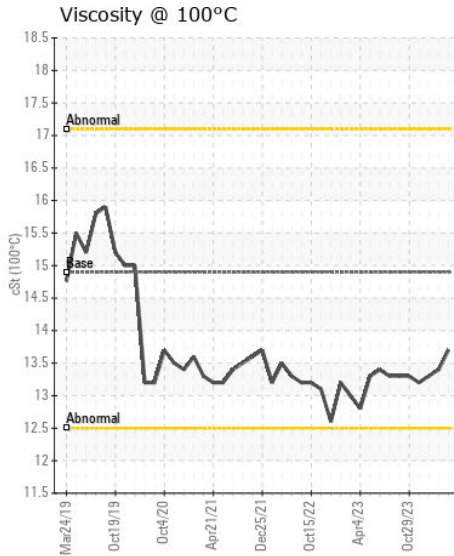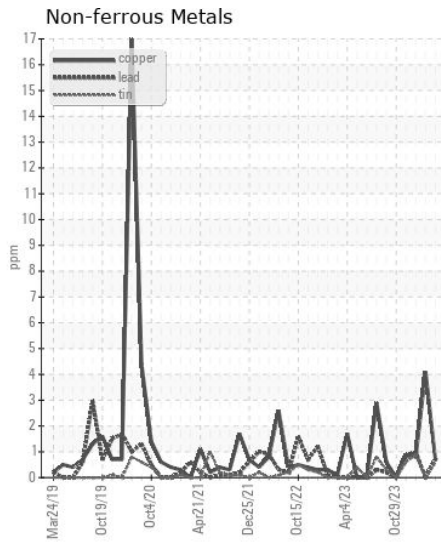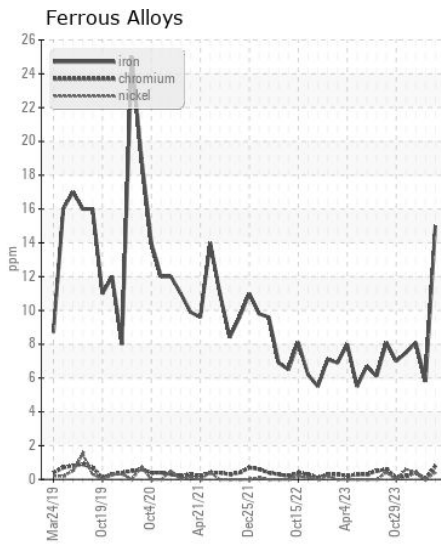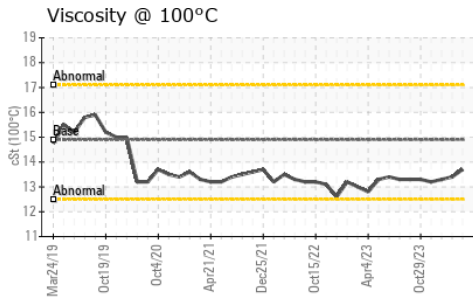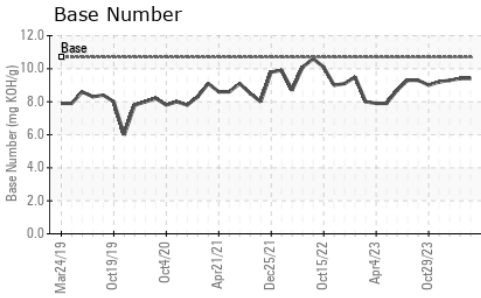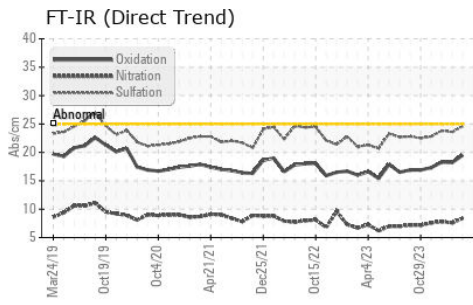

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0061713
Lab Number : 06176615
Unique Number : 11022668
Test Package : MAR 2

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 14 May 2024 - Sean Felton

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: GLENN ELLIS
 glen.ellis@ingrambarge.com

T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)