



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L90H 626448
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004959	VCP417607	VCP416053
Sample Date		Client Info		07 May 2024	12 Feb 2024	30 Oct 2023
Machine Age	hrs	Client Info		3011	2519	1976
Oil Age	hrs	Client Info		500	500	500
Filter Age	hrs	Client Info		500	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	12	11	10
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	5	4	3
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>15	3	<1	0
Tin	ppm	ASTM D5185m	>10	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	8	8	8
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	7.8	8.0	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.3	22.5	22.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	2	1
Boron	ppm	ASTM D5185m	2.5	34	36	32
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	41	43	40
Manganese	ppm	ASTM D5185m	0.0	1	<1	<1
Magnesium	ppm	ASTM D5185m	256	554	563	525
Calcium	ppm	ASTM D5185m	2057	1820	1848	1653
Phosphorus	ppm	ASTM D5185m	935	977	996	944
Zinc	ppm	ASTM D5185m	1223	1208	1165	1147
Sulfur	ppm	ASTM D5185m	4079	3540	3061	2898
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.3	21.4	20.9
Base Number (BN)	mg KOH/g	ASTM D2896	10	10.0	10.0	10.6
Visc @ 100°C	cSt	ASTM D445	15.0	13.4	13.3	12.9


FT-IR (Direct Trend)

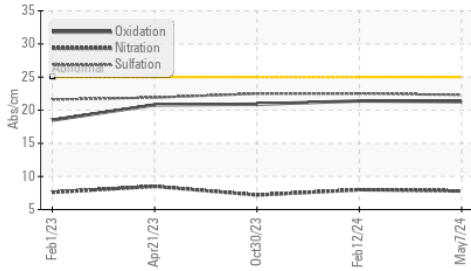


Ferrous Alloys

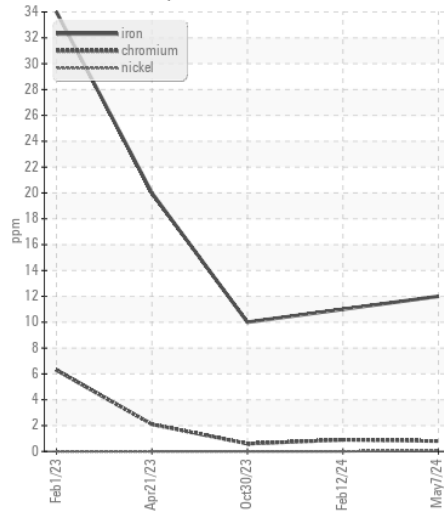


Base Number

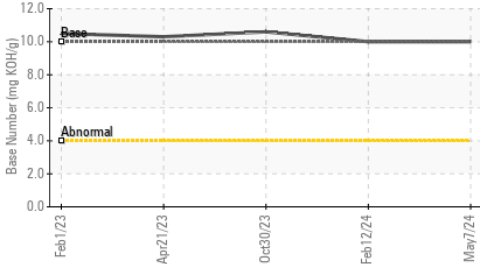


Non-ferrous Metals

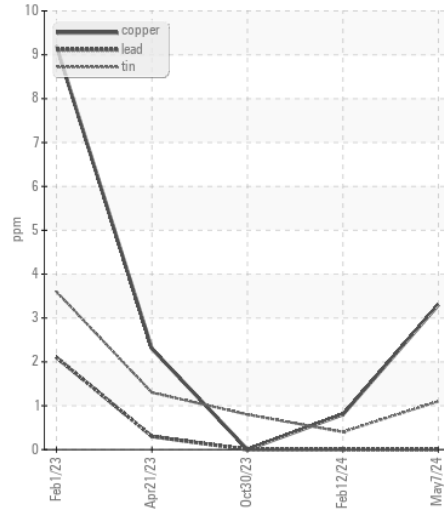


Viscosity @ 100°C

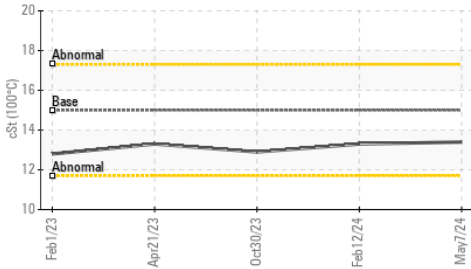

Viscosity @ 100°C

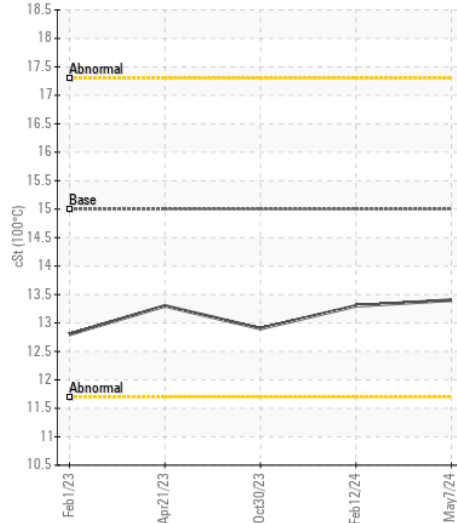

Base Number

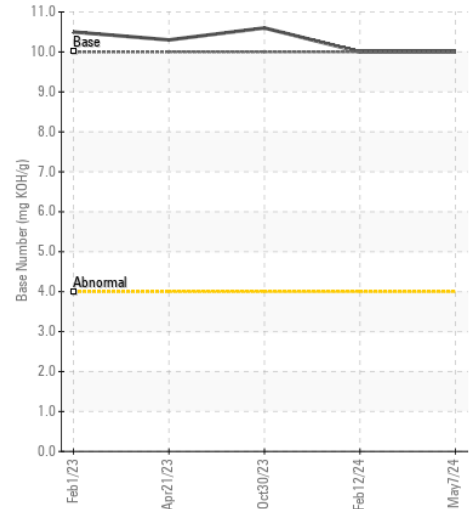

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0004959

Lab Number : 06176681

Unique Number : 11022734

Test Package : CONST (Additional Tests: TBN)

Received : 13 May 2024

Tested : 14 May 2024

Diagnosed : 14 May 2024 - Wes Davis

365 - ASCENDUM MACHINERY INC - SAVANNAH

54 MEDLINE DR

RICHMOND HILL, GA

US 31324

Contact: JESSE WILSON

jesse.wilson@ascendummachinery.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (912)964-9515