



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(SB14912)
Machine Id
813108
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113014	GFL0113007	GFL0098414
Sample Date		Client Info		07 May 2024	08 Mar 2024	08 Nov 2023
Machine Age	hrs	Client Info		1553	1272	602
Oil Age	hrs	Client Info		1553	1272	602
Filter Age	hrs	Client Info		0	1272	602
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	13	31	66
Chromium	ppm	ASTM D5185m	>20	<1	1	2
Nickel	ppm	ASTM D5185m	>5	4	▲ 9	▲ 21
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	<1	<1	1
Aluminum	ppm	ASTM D5185m	>20	1	2	5
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	27	126	135
Tin	ppm	ASTM D5185m	>15	<1	1	3
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	9	66
Potassium	ppm	ASTM D5185m	>20	0	3	12
Fuel		WC Method	>3.0	<1.0	<1.0	0.3
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.5	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	7.1	9.1	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	20.6	24.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	<1	2
Boron	ppm	ASTM D5185m	250	3	6	229
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	61	69	126
Manganese	ppm	ASTM D5185m		2	1	7
Magnesium	ppm	ASTM D5185m	450	978	938	662
Calcium	ppm	ASTM D5185m	3000	1074	1078	1463
Phosphorus	ppm	ASTM D5185m	1150	1059	958	671
Zinc	ppm	ASTM D5185m	1350	1257	1181	843
Sulfur	ppm	ASTM D5185m	4250	3361	2550	2480
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	16.9	22.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.8	6.7	7.7
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	13.7	10.2


FT-IR (Direct Trend)

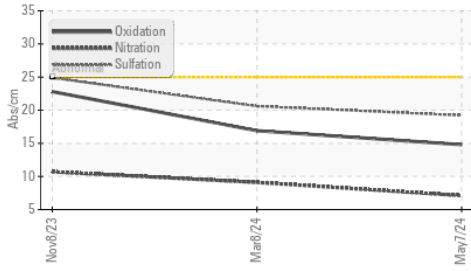


Ferrous Alloys

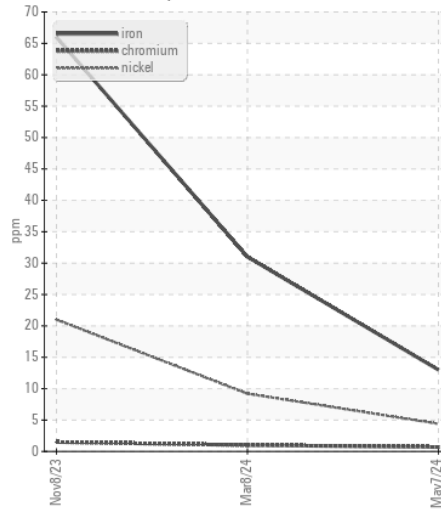


Base Number

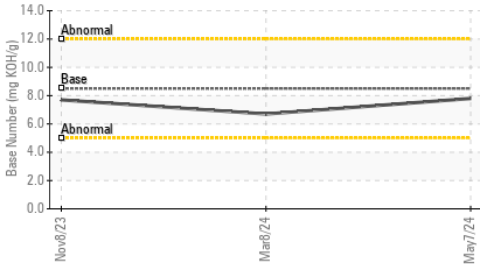


Non-ferrous Metals

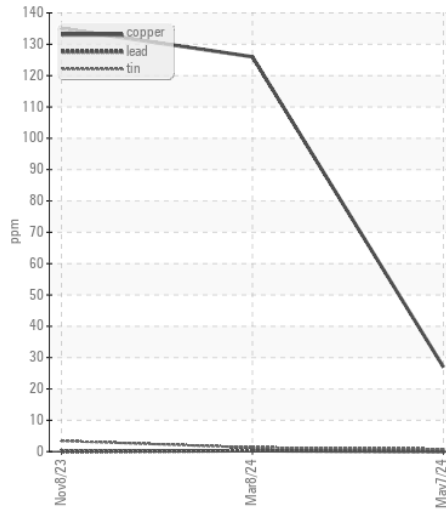


Viscosity @ 100°C

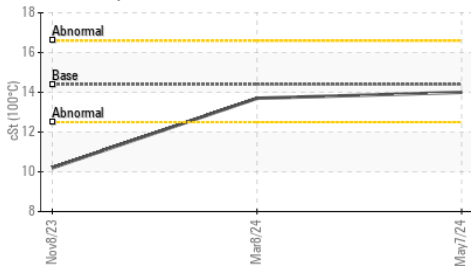

Viscosity @ 100°C

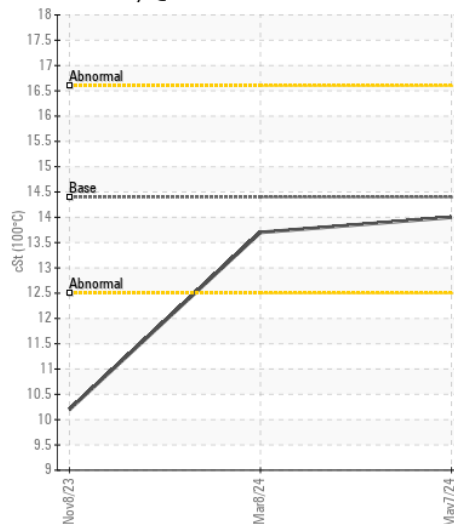

Base Number

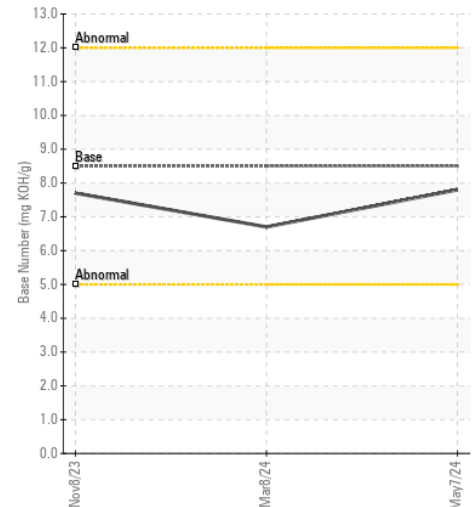

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113014
Lab Number : 06176744
Unique Number : 11022797
Test Package : FLEET

Received : 13 May 2024
Tested : 14 May 2024
Diagnosed : 14 May 2024 - Wes Davis

GFL Environmental - 918 - Hartland HC
 630 E Industrial Drive
 Hartland, WI
 US 53029

Contact: David McCall
 david.mccall@gflenv.com
 T: (262)369-3069

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: