



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
12366
Component
Gasoline Engine
Fluid
CHEVRON SUPREME MOTOR OIL 5W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0924601	WC0882712	WC0810001
Sample Date		Client Info		07 May 2024	14 Feb 2024	18 Dec 2023
Machine Age	mls	Client Info		96914	90816	86697
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	12	9	9
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	3	2	3
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>155	11	5	7
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	20	18	21
Potassium	ppm	ASTM D5185m	>20	1	2	5
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.2	0
Nitration	Abs/cm	*ASTM D7624	>20	10.8	7.7	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8	20.1	22.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	3	2	2
Boron	ppm	ASTM D5185m		40	61	40
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	9	6
Manganese	ppm	ASTM D5185m		5	3	3
Magnesium	ppm	ASTM D5185m		728	743	712
Calcium	ppm	ASTM D5185m		1342	1313	1247
Phosphorus	ppm	ASTM D5185m	780	704	776	697
Zinc	ppm	ASTM D5185m	860	808	880	808
Sulfur	ppm	ASTM D5185m		3196	3044	2797
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	16.2	18.3
Base Number (BN)	mg KOH/g	ASTM D2896	7.8	5.5	6.4	5.8
Visc @ 100°C	cSt	ASTM D445	9.7	12.7	12.6	13.0

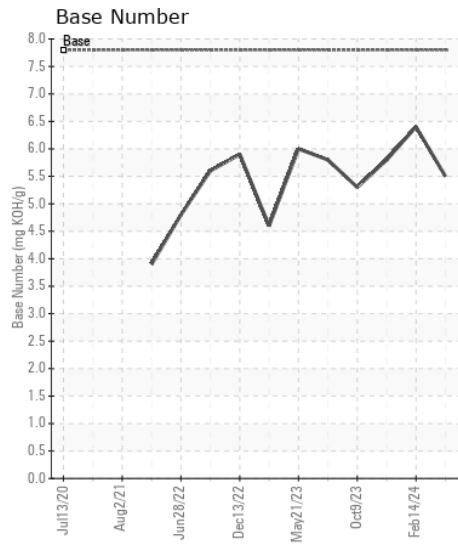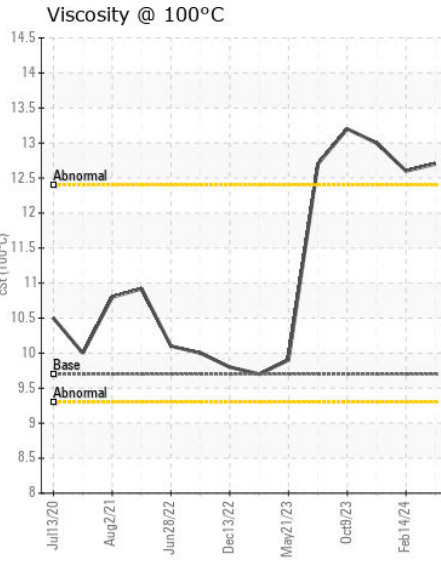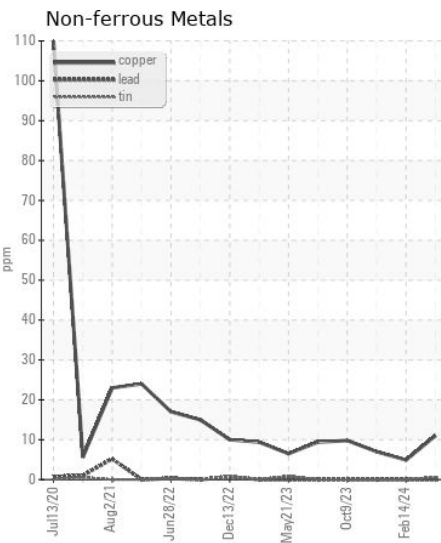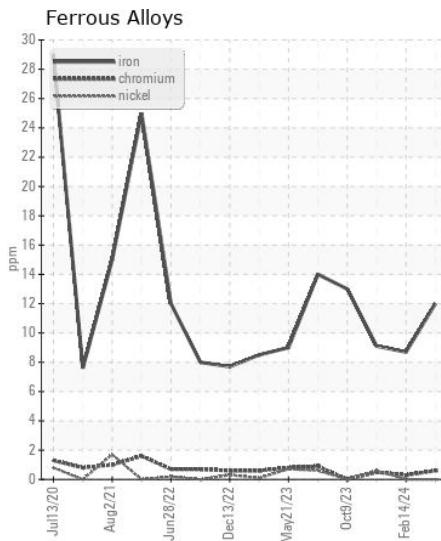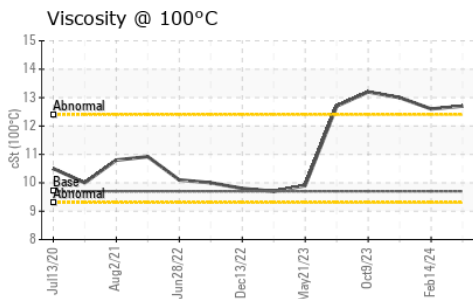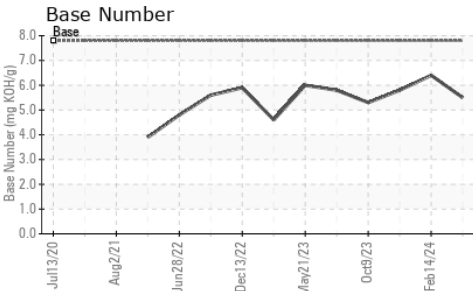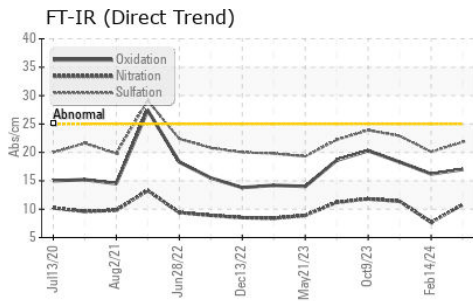

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0924601 **Received** : 13 May 2024
Lab Number : 06176755 **Tested** : 14 May 2024
Unique Number : 11022808 **Diagnosed** : 14 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560
 Contact: SCOTT SULLIVAN
 ssullivan@sullivaneastern.com
 T: (919)484-8993
 F: (919)484-2136

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)