



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ATTENTION

Machine Id
1012
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0897848	WC0878772	WC0894044
Sample Date		Client Info		30 Apr 2024	21 Feb 2024	20 Jan 2024
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				SEVERE	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	21	10	10
Chromium	ppm	ASTM D5185m	>20	1	0	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	0	2
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	2	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION














Test for glycol is positive. There is a high concentration of glycol present in the oil.

Silicon	ppm	ASTM D5185m	>25	21	3	5
Potassium	ppm	ASTM D5185m	>20	470	0	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	*ASTM D2982		0.10	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.7	8.3	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4	19.5	19.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>158	242	1	3
Boron	ppm	ASTM D5185m	250	1	0	5
Barium	ppm	ASTM D5185m	10	2	0	0
Molybdenum	ppm	ASTM D5185m	100	88	61	60
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	450	948	1076	946
Calcium	ppm	ASTM D5185m	3000	1158	1169	1050
Phosphorus	ppm	ASTM D5185m	1150	1089	1120	1063
Zinc	ppm	ASTM D5185m	1350	1243	1321	1286
Sulfur	ppm	ASTM D5185m	4250	3232	3219	3002
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	17.0	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.8	7.9	7.2
Visc @ 100°C	cSt	ASTM D445	14.4	14.6	14.4	14.2

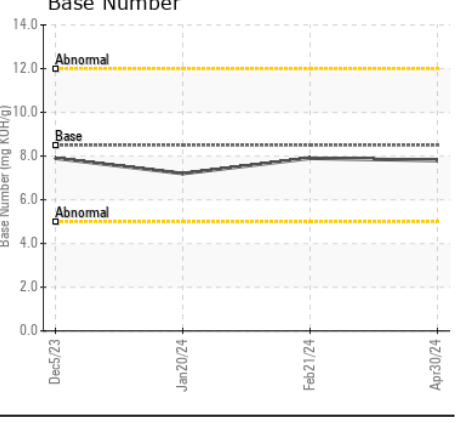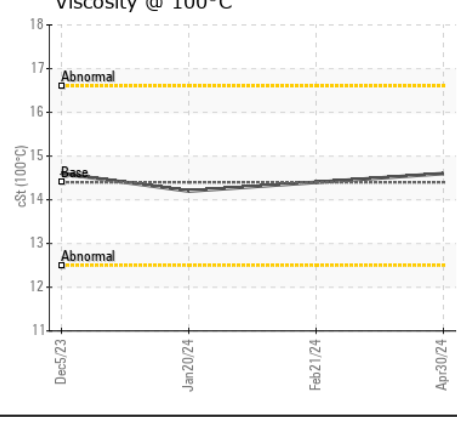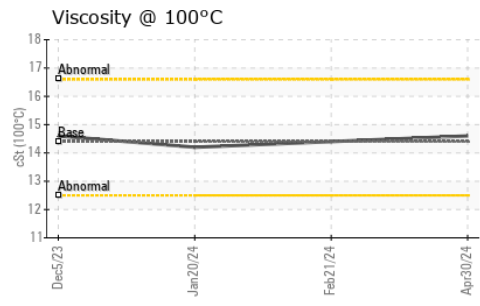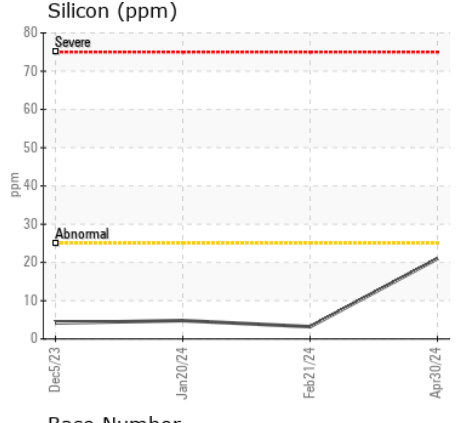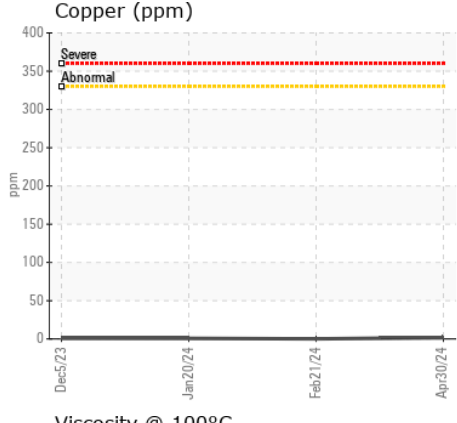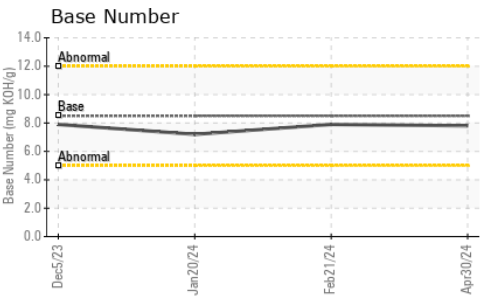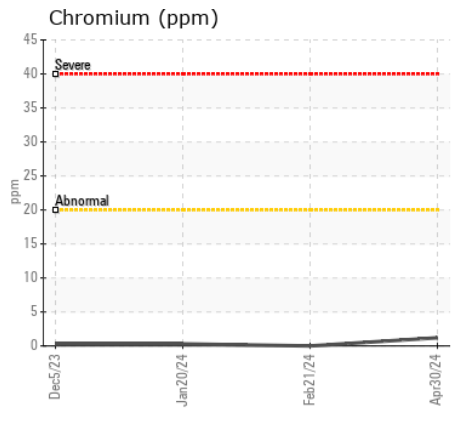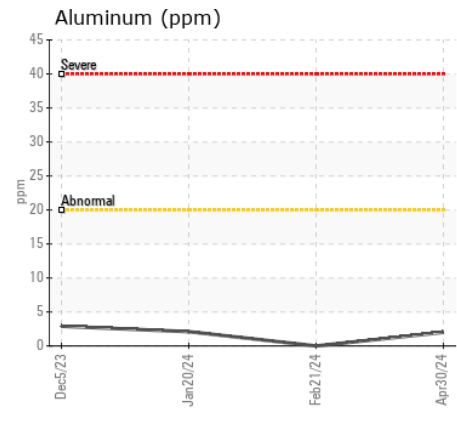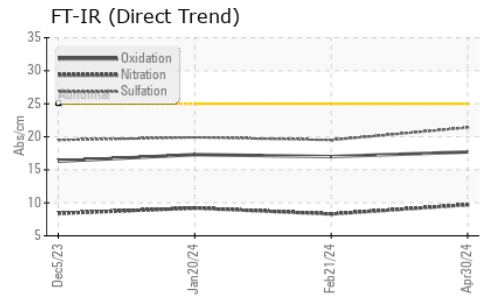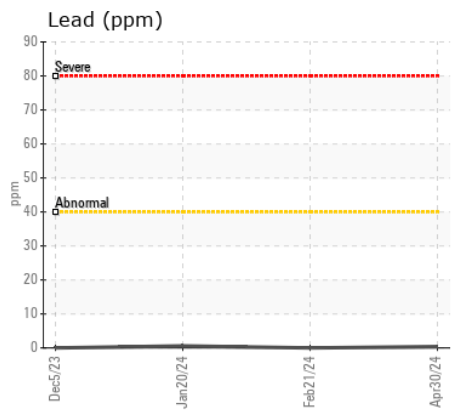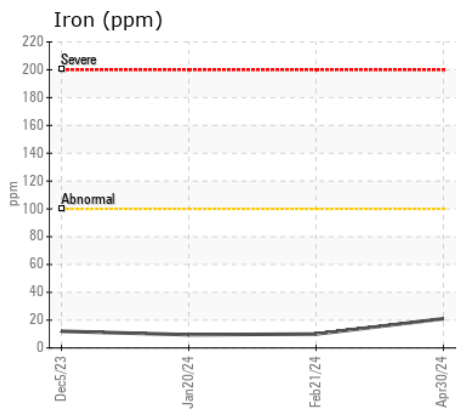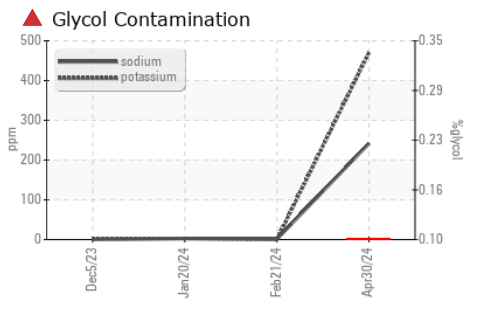

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0897848 **Received** : 13 May 2024
Lab Number : 06176796 **Tested** : 16 May 2024
Unique Number : 11022849 **Diagnosed** : 16 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol, TBN)

GO DURHAM - RAPT
 1903 FAYETTEVILLE ST
 DURHAM, NC
 US 27701
 Contact: Robert Iosiniecki
 Robert.iosiniecki@ratpdev.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)