



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
MURTAGH [MURTAGH]
Machine Id
ONAN E180348359
Component
Genset
Fluid
VOLVO PENTA SAE 15W40 (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA057328	---	---
Sample Date		Client Info		07 May 2024	---	---
Machine Age	hrs	Client Info		331	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>50	3	---	---
Chromium	ppm	ASTM D5185m	>4	<1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>12	2	---	---
Lead	ppm	ASTM D5185m	>17	<1	---	---
Copper	ppm	ASTM D5185m	>70	1	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		6	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		58	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		869	---	---
Calcium	ppm	ASTM D5185m		1156	---	---
Phosphorus	ppm	ASTM D5185m		1093	---	---
Zinc	ppm	ASTM D5185m		1198	---	---
Sulfur	ppm	ASTM D5185m		3483	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.7	---	---
Visc @ 100°C	cSt	ASTM D445		13.0	---	---

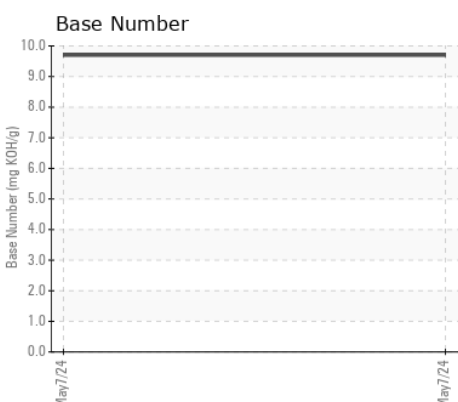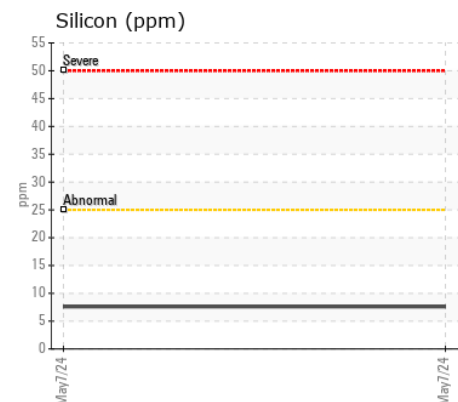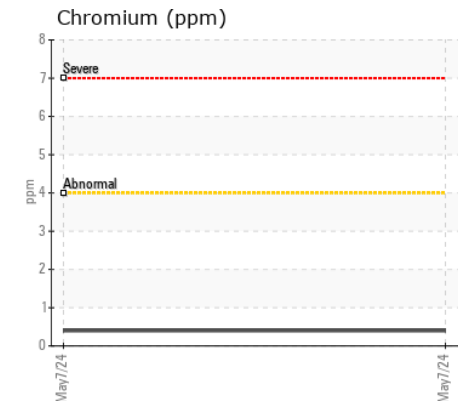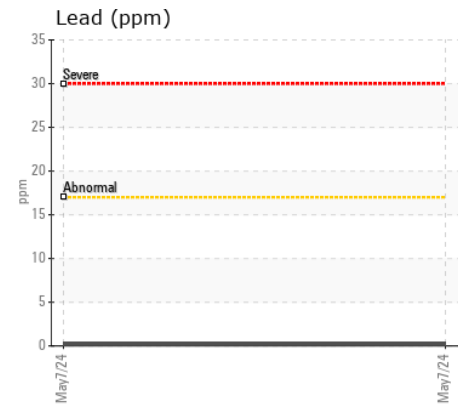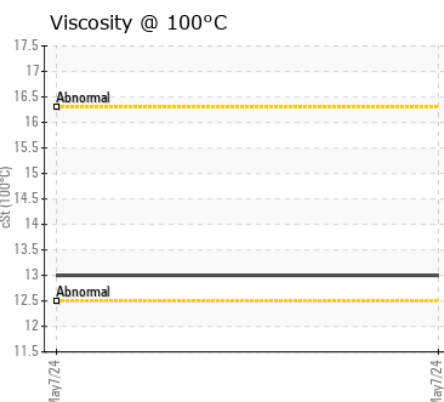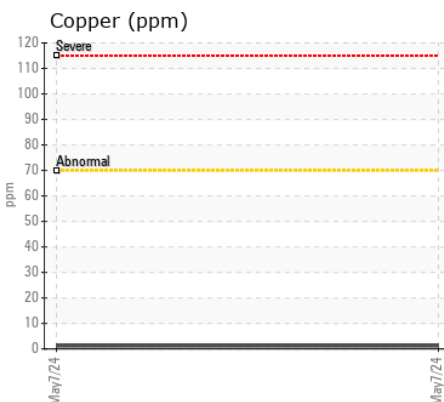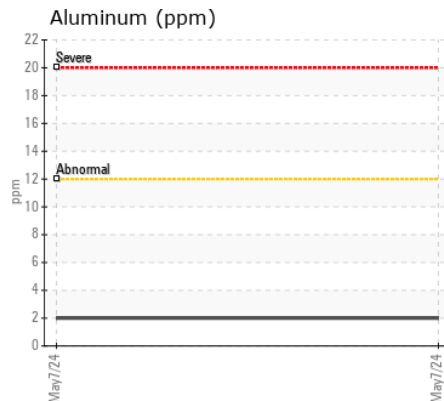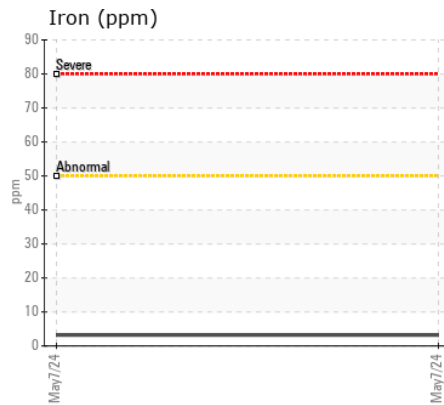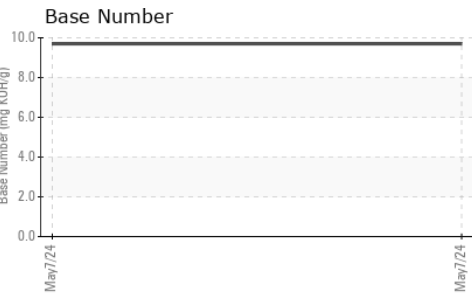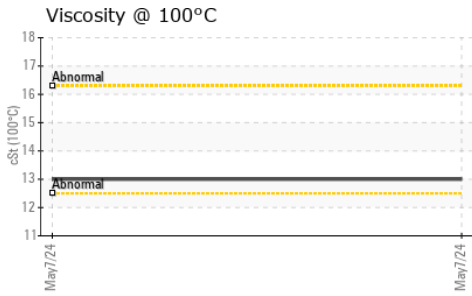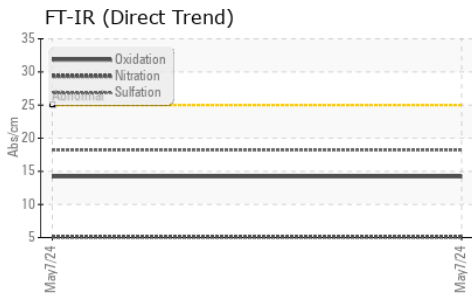

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA057328 **Received** : 13 May 2024
Lab Number : 06176823 **Tested** : 14 May 2024
Unique Number : 11022876 **Diagnosed** : 14 May 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: TBN)

Suncoast Diesel Marine Inc.
 610 Mount Vernan St
 OLDSMAR, FL
 US 34677
 Contact: MARK WARREN
 oldsmar@suncoastdmi.com
 T: (813)475-5942
 F: (813)475-5943

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)