



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO EC300EL 312525
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP382976	VC527561	VC549440
Sample Date		Client Info		08 May 2024	29 Mar 2023	20 Jul 2022
Machine Age	hrs	Client Info		1176	1009	935
Oil Age	hrs	Client Info		167	156	235
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	4	4
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	2
Aluminum	ppm	ASTM D5185m	>10	2	1	3
Lead	ppm	ASTM D5185m	>20	<1	0	<1
Copper	ppm	ASTM D5185m	>15	5	1	1
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	9	8	6
Potassium	ppm	ASTM D5185m	>20	4	4	3
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.8	5.4	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	17.5	18.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	0	1	1
Boron	ppm	ASTM D5185m		32	42	32
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		30	30	25
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		315	287	190
Calcium	ppm	ASTM D5185m		1866	1661	2159
Phosphorus	ppm	ASTM D5185m		937	730	910
Zinc	ppm	ASTM D5185m		1013	875	1077
Sulfur	ppm	ASTM D5185m		3432	2404	4289
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	14.3	12.8
Base Number (BN)	mg KOH/g	ASTM D2896		8.5	8.3	9.1
Visc @ 100°C	cSt	ASTM D445		12.9	13.0	15.0

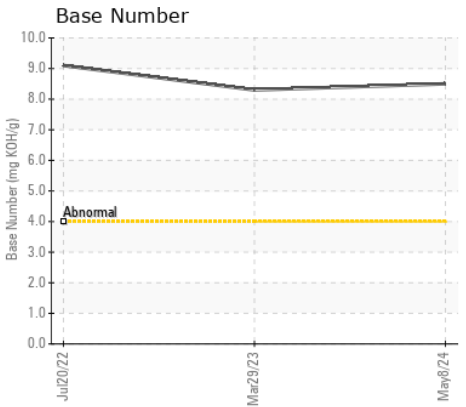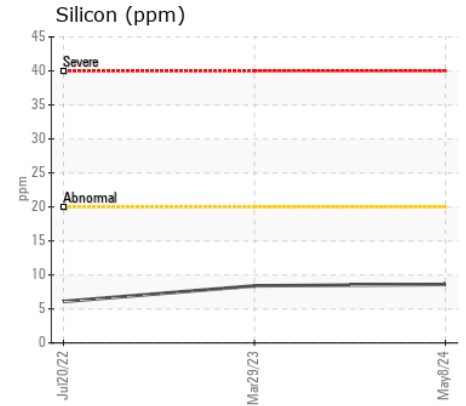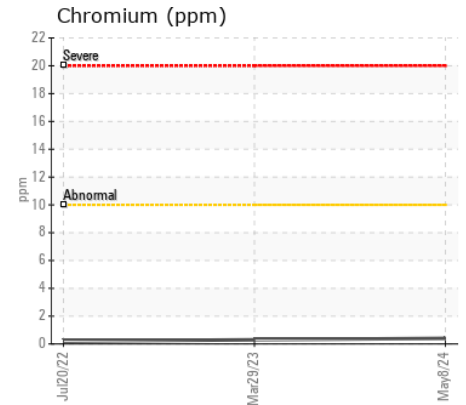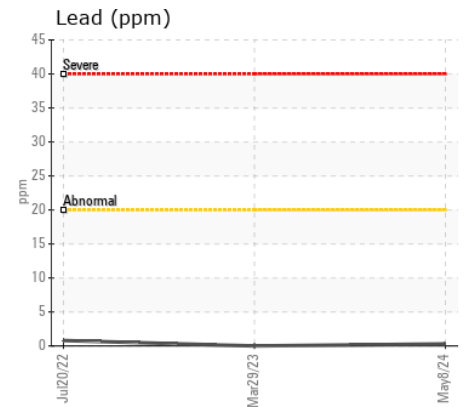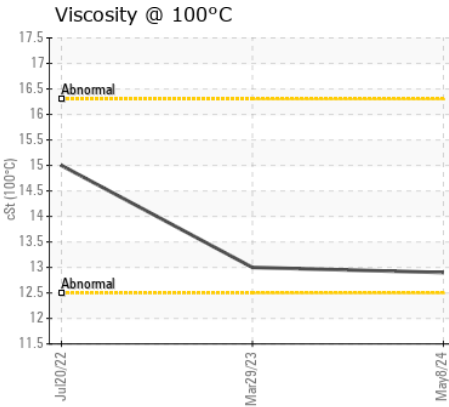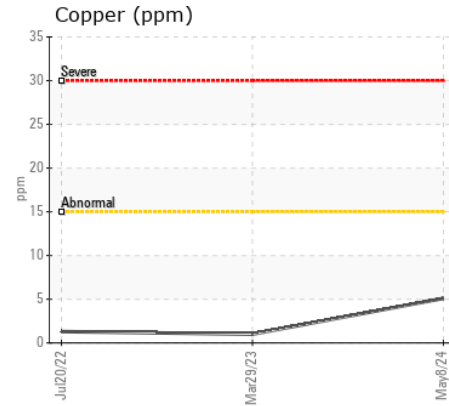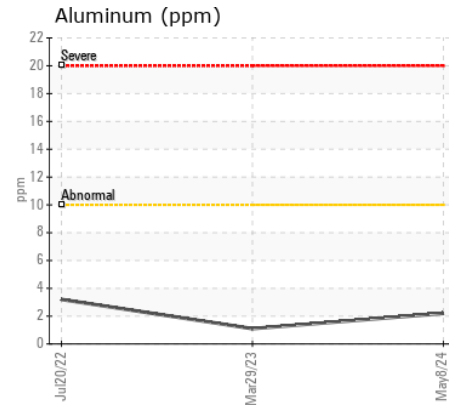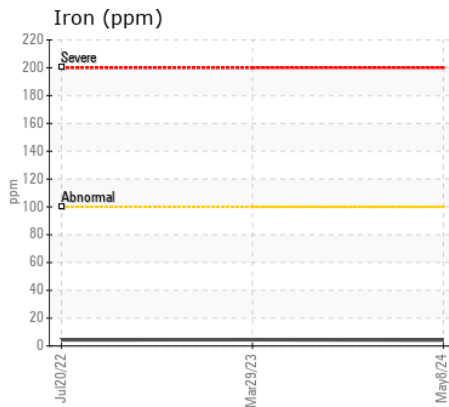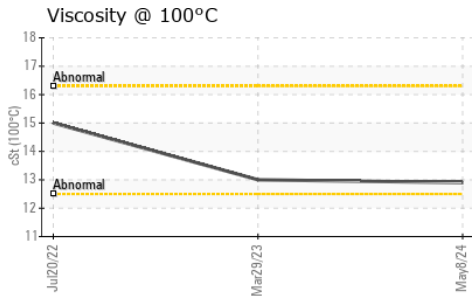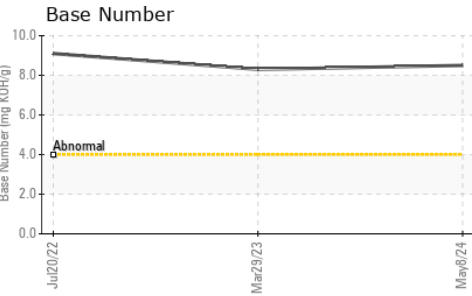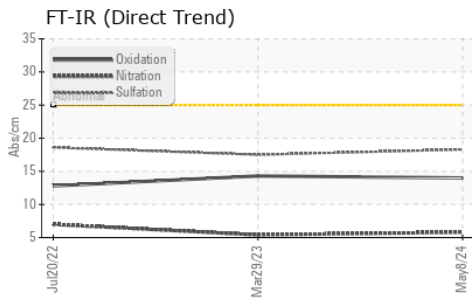

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP382976 **Received** : 13 May 2024
Lab Number : 06176856 **Tested** : 14 May 2024
Unique Number : 11022909 **Diagnosed** : 14 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

DUNN COUNTY HIGHWAY DEPARTMENT
 ROUTE 2 BOX 71A, 3303 US HWY 12 EAST
 MENOMONIE, WI
 US 54751
 Contact: DANNY NELSON
 dnelson@co.dunn.wi.us
 T: (715)232-2361
 F: (715)232-3888

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)