



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**224035-35**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0121137</b>	GFL0091980	GFL0091978
Sample Date		Client Info		<b>10 May 2024</b>	21 Feb 2024	21 Nov 2023
Machine Age	hrs	Client Info		<b>14728</b>	14668	14552
Oil Age	hrs	Client Info		<b>300</b>	116	145
Filter Age	hrs	Client Info		<b>300</b>	116	145
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>7</b>	4	10
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m	>70	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>175	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>2</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.0</b>	5.1	5.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.9</b>	18.0	17.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	3
Boron	ppm	ASTM D5185m	0	<b>7</b>	6	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>63</b>	55	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1017</b>	865	947
Calcium	ppm	ASTM D5185m	1070	<b>1131</b>	969	1113
Phosphorus	ppm	ASTM D5185m	1150	<b>1095</b>	964	1111
Zinc	ppm	ASTM D5185m	1270	<b>1315</b>	1107	1249
Sulfur	ppm	ASTM D5185m	2060	<b>3836</b>	2832	2763
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.3</b>	13.2	13.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.2</b>	9.0	7.7
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.7</b>	13.0	12.6

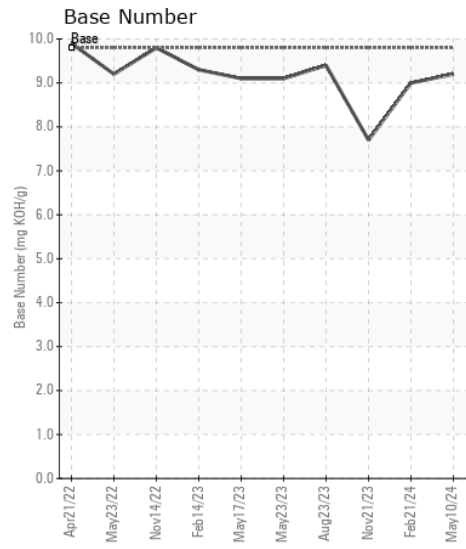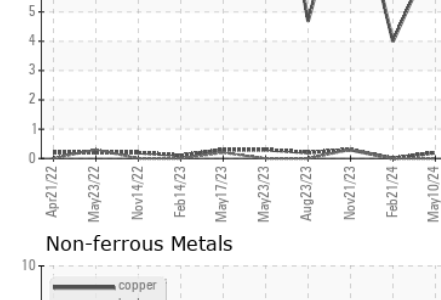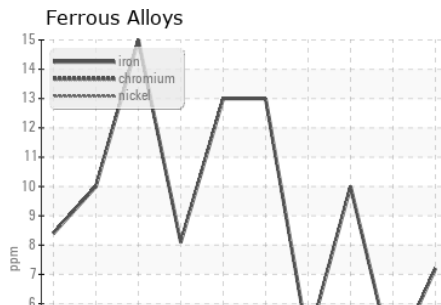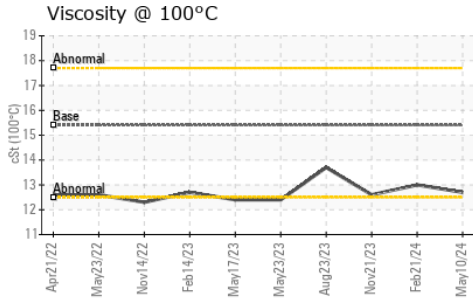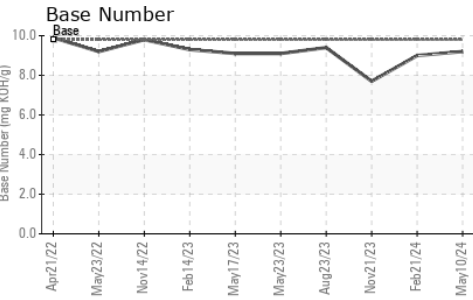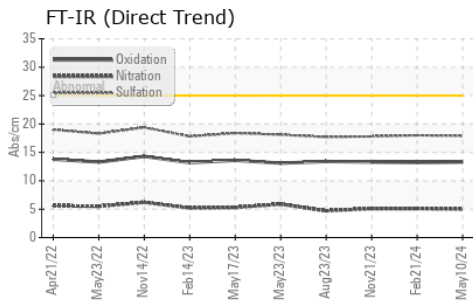

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0121137  
**Lab Number** : 06176884  
**Unique Number** : 11022937  
**Test Package** : FLEET

**Received** : 13 May 2024  
**Tested** : 14 May 2024  
**Diagnosed** : 14 May 2024 - Wes Davis

**GFL Environmental - 683 - Ruckersville Hauling**  
 261 INDUSTRIAL DR  
 Ruckersville, VA  
 US 22698  
 Contact: Jaf Finney  
 jfinney@gflenv.com  
 T: (434)990-4972  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)