



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
Store 9 - Marietta
Machine Id
KENWORTH 1057

Component
Diesel Engine
Fluid
SHELL ROTELLA T 15W40 (10 GAL)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0049555	LEC0045868	LEC0041013
Sample Date		Client Info		30 Apr 2024	27 Oct 2023	27 Sep 2023
Machine Age	hrs	Client Info		25682	25169	24642
Oil Age	hrs	Client Info		400	400	400
Filter Age	hrs	Client Info		400	400	400
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ATTENTION	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	19	19	33
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	5	7
Lead	ppm	ASTM D5185m	>40	4	4	0
Copper	ppm	ASTM D5185m	>330	4	<1	2
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elemental level of silicon (Si) above normal.


Silicon	ppm	ASTM D5185m	>120	▲ 25	8	10
Potassium	ppm	ASTM D5185m	>20	3	5	▲ 49
Fuel		WC Method	>5	<1.0	▲ 3.0	▲ 6.1
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	▲ 0.10
Soot %	%	*ASTM D7844	>3	0.3	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	7.6	12.3	12.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	28.0	27.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	● 220	● 1066
Boron	ppm	ASTM D5185m	316	54	164	172
Barium	ppm	ASTM D5185m	0.0	<1	0	0
Molybdenum	ppm	ASTM D5185m	1.2	65	149	306
Manganese	ppm	ASTM D5185m		3	<1	<1
Magnesium	ppm	ASTM D5185m	24	423	604	635
Calcium	ppm	ASTM D5185m	2292	1834	1505	1458
Phosphorus	ppm	ASTM D5185m	1064	1010	553	574
Zinc	ppm	ASTM D5185m	1160	1276	766	819
Sulfur	ppm	ASTM D5185m	4996	3688	2164	2494
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.3	27.2	25.1
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	8.0	6.5	7.8
Visc @ 100°C	cSt	ASTM D445	15.7	12.8	13.1	▲ 12.3


▲ Silicon (ppm)

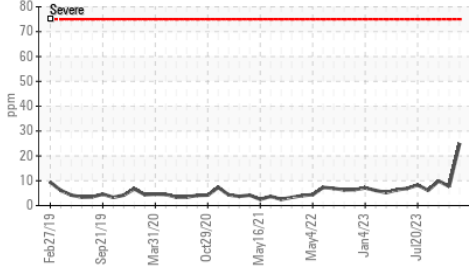


Ferrous Alloys

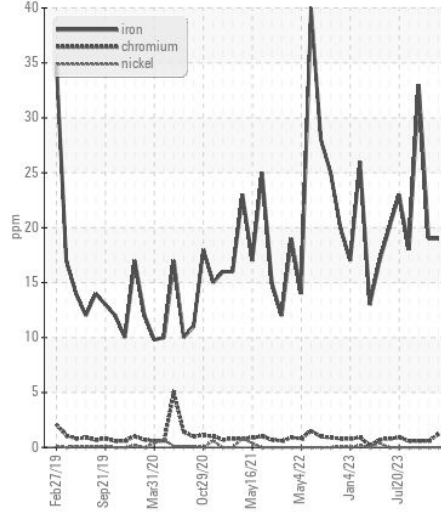


FT-IR (Direct Trend)

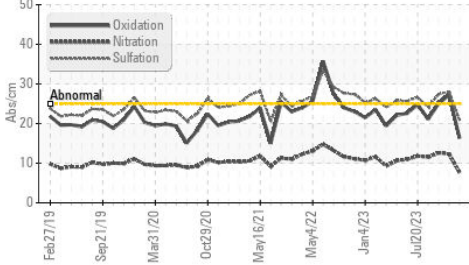


Non-ferrous Metals

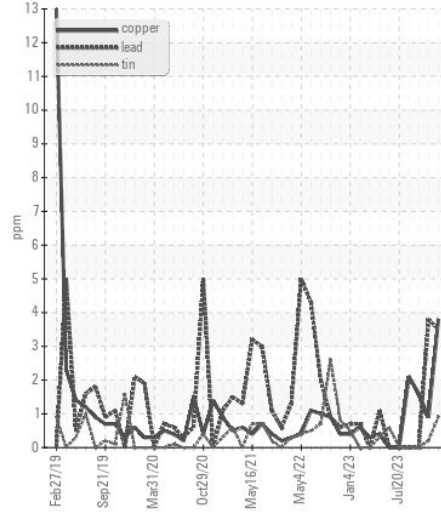


Base Number

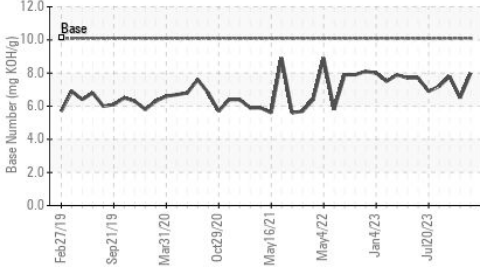


Viscosity @ 100°C

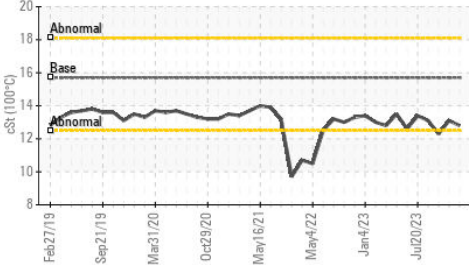

Viscosity @ 100°C

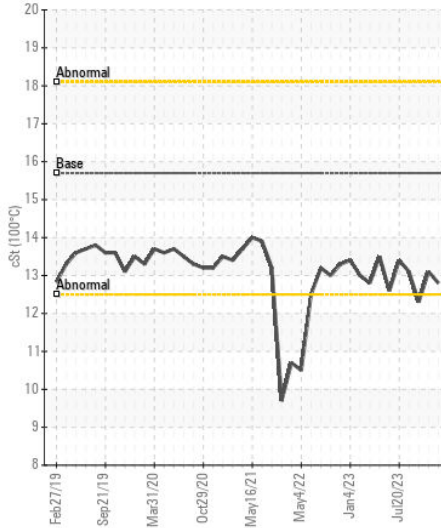

Base Number

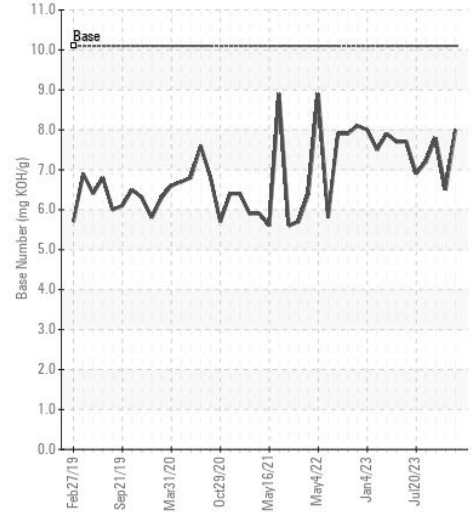

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LEC0049555
 Lab Number : 06176977
 Unique Number : 11023030
 Test Package : CONST (Additional Tests: TBN)

HALL DRILLING LLC
 PO BOX 249
 ELLENBORO, WV
 US 26346

Contact: CHRIS PETROVICH
 chrispetrovich@halldrilling.com
 T: (304)869-3404
 F: (304)869-3408

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)