



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Store 9 - Marietta**

Machine Id  
**PETERBILT 1049**

Component  
**Diesel Engine**

Fluid  
**SHELL ROTELLA T 15W40 (10 GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0049546</b>	LEC0048265	LEC0045861
Sample Date		Client Info		<b>05 May 2024</b>	06 Apr 2024	28 Feb 2024
Machine Age	mls	Client Info		<b>1012366</b>	998423	984892
Oil Age	mls	Client Info		<b>10000</b>	10000	10000
Filter Age	mls	Client Info		<b>10000</b>	10000	10000
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

## WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	<b>20</b>	15	3
Chromium	ppm	ASTM D5185m	>4	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	2	1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	4	4
Lead	ppm	ASTM D5185m	>45	<b>▲ 49</b>	26	2
Copper	ppm	ASTM D5185m	>85	<b>1</b>	1	0
Tin	ppm	ASTM D5185m	>4	<b>2</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	<b>10</b>	9	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	9	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.8	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.9</b>	10.7	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>27.8</b>	25.8	21.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	1
Boron	ppm	ASTM D5185m	316	<b>171</b>	180	326
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	1.2	<b>100</b>	112	98
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	24	<b>513</b>	572	576
Calcium	ppm	ASTM D5185m	2292	<b>1627</b>	1591	1385
Phosphorus	ppm	ASTM D5185m	1064	<b>1007</b>	939	822
Zinc	ppm	ASTM D5185m	1160	<b>1218</b>	1076	973
Sulfur	ppm	ASTM D5185m	4996	<b>3600</b>	2927	2827
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.1</b>	21.2	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>6.3</b>	7.0	8.5
Visc @ 100°C	cSt	ASTM D445	15.7	<b>14.1</b>	14.0	13.7

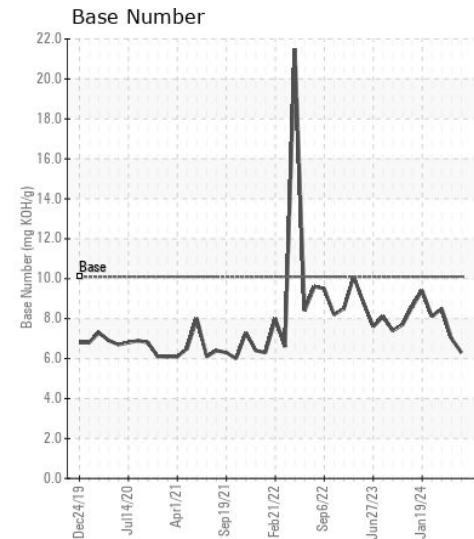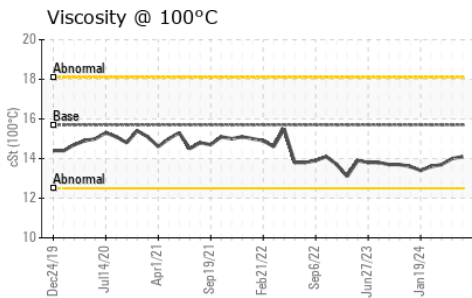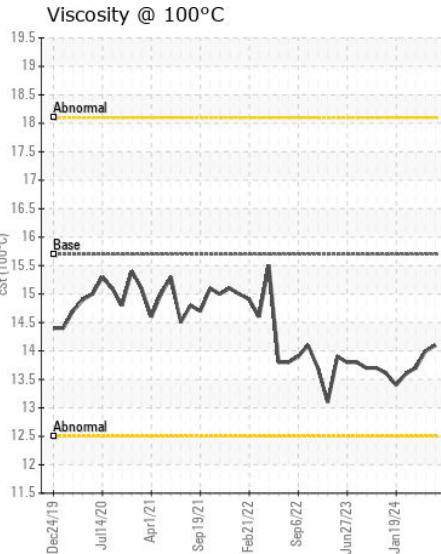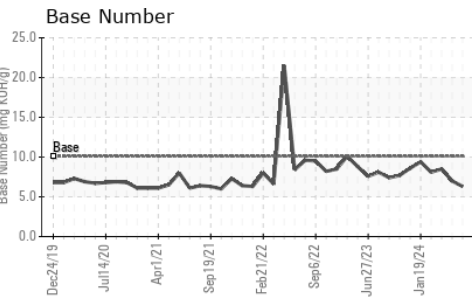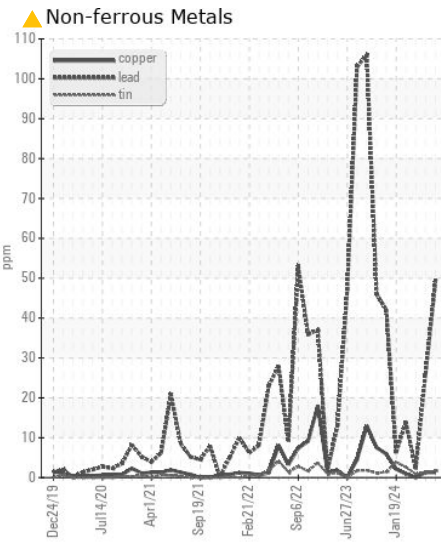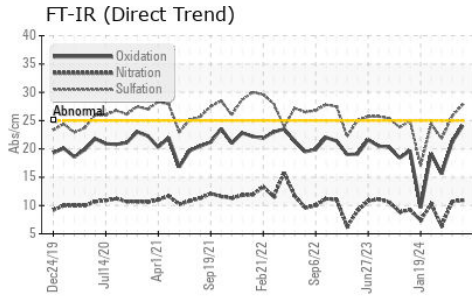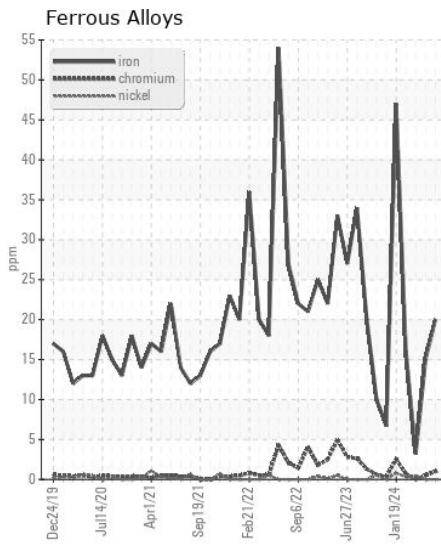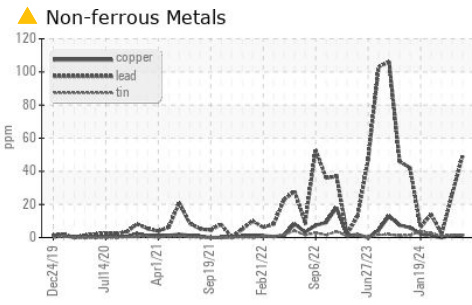

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0049546 **Received** : 13 May 2024  
**Lab Number** : 06176989 **Tested** : 14 May 2024  
**Unique Number** : 11023042 **Diagnosed** : 14 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**HALL DRILLING LLC**  
 PO BOX 249  
 ELLENBORO, WV  
 US 26346  
 Contact: CHRIS PETROVICH  
 chrispetrovich@halldrilling.com  
 T: (304)869-3404  
 F: (304)869-3408

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)