



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W11541]**  
 Machine Id  
**PETERBILT PB 536 Salem field (S/N 2npkhm6x3pm869906)**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0207645</b>	---	---
Sample Date		Client Info		<b>09 May 2024</b>	---	---
Machine Age	mls	Client Info		<b>20225</b>	---	---
Oil Age	mls	Client Info		<b>10000</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>110	<b>31</b>	---	---
Chromium	ppm	ASTM D5185m	>4	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>12</b>	---	---
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>85	<b>20</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>15</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>22</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.5</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	---	---
Boron	ppm	ASTM D5185m		<b>214</b>	---	---
Barium	ppm	ASTM D5185m		<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>241</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>820</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1522</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>924</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1110</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3375</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.6</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.0</b>	---	---
Visc @ 100°C	cSt	ASTM D445		<b>12.8</b>	---	---

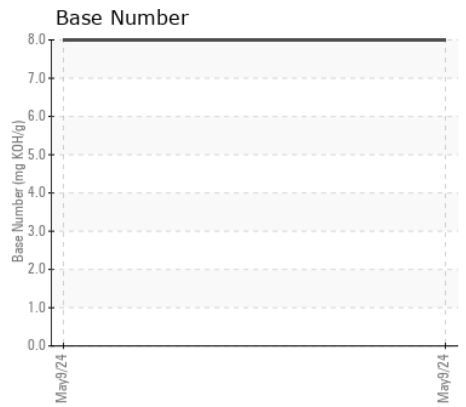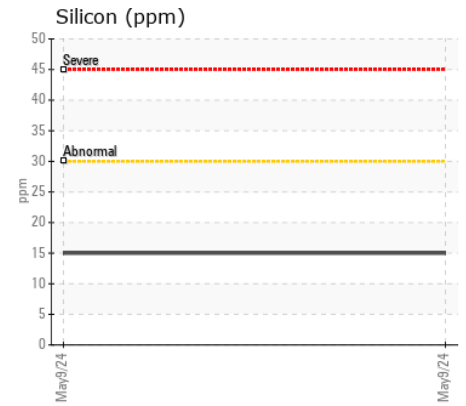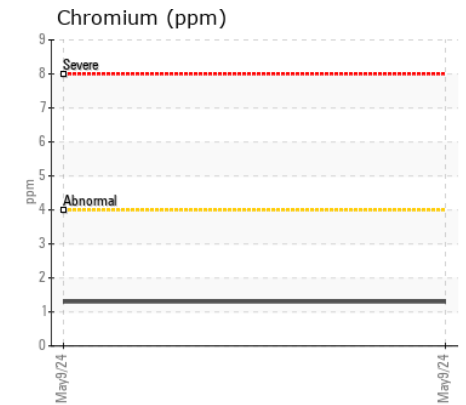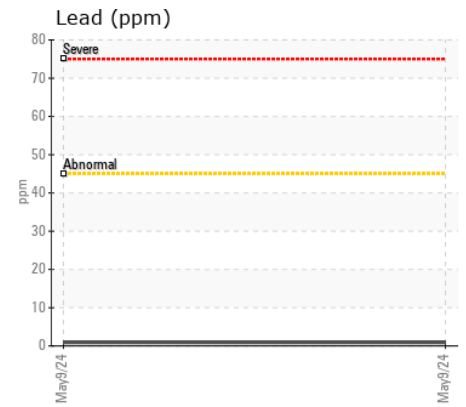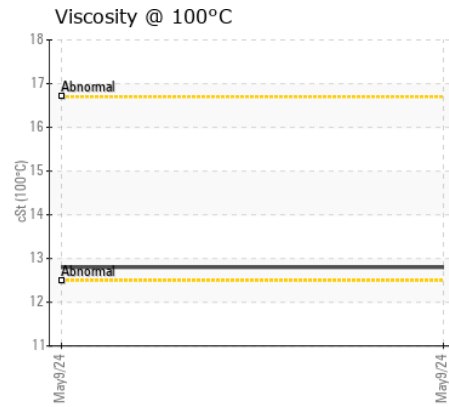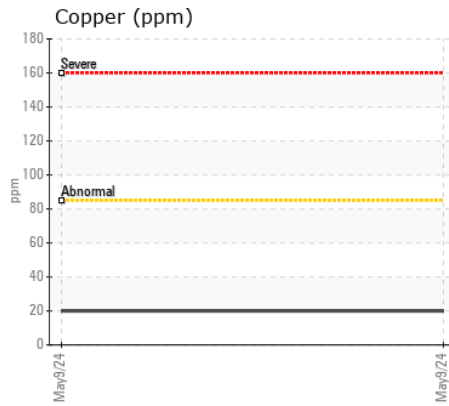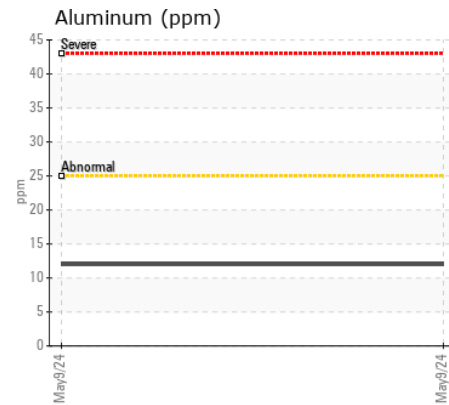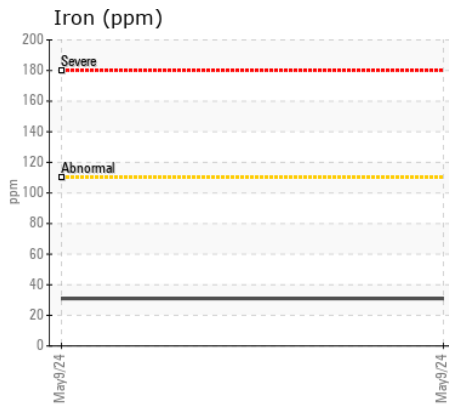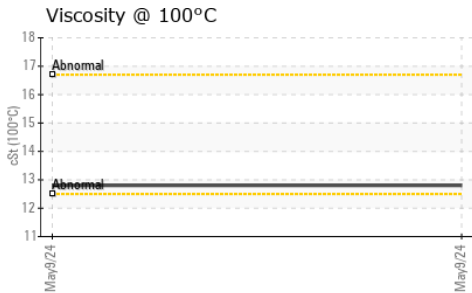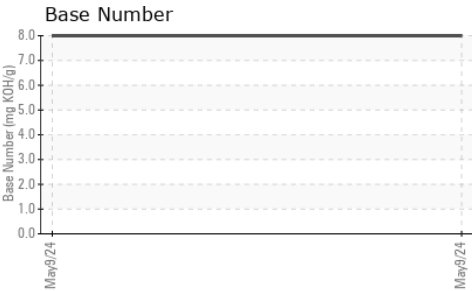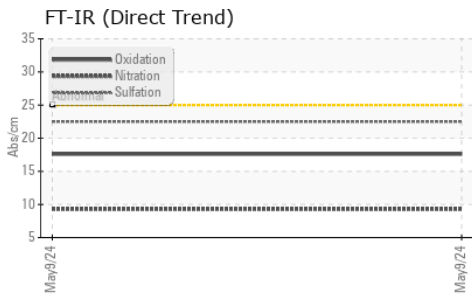

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0207645 **Received** : 13 May 2024  
**Lab Number** : 06177007 **Tested** : 14 May 2024  
**Unique Number** : 11023060 **Diagnosed** : 14 May 2024 - Wes Davis  
**Test Package** : MOBCE ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - SALEM**  
 3902 W. MAIN STREET  
 SALEM, VA  
 US 24153  
 Contact: BUTCH GOAD  
 bgoad@jrenet.com  
 T:  
 F: (540)380-5547