



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
172389
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0057340	PCA0020950	---
Sample Date		Client Info		08 Apr 2024	21 Dec 2021	---
Machine Age	mls	Client Info		10609	145638	---
Oil Age	mls	Client Info		601	24819	---
Filter Age	mls	Client Info		0	24819	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	6	0	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	1	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	1	1	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	3	---
Potassium	ppm	ASTM D5185m	>20	9	30	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	0.0	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.1	7.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	20.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m	2	7	13	---
Barium	ppm	ASTM D5185m	0	2	0	---
Molybdenum	ppm	ASTM D5185m	50	53	174	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	950	852	954	---
Calcium	ppm	ASTM D5185m	1050	1213	1059	---
Phosphorus	ppm	ASTM D5185m	995	1118	953	---
Zinc	ppm	ASTM D5185m	1180	1159	1188	---
Sulfur	ppm	ASTM D5185m	2600	3434	2764	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.1	17.5	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.73	9.1	---
Visc @ 100°C	cSt	ASTM D445	12.00	11.6	14.3	---

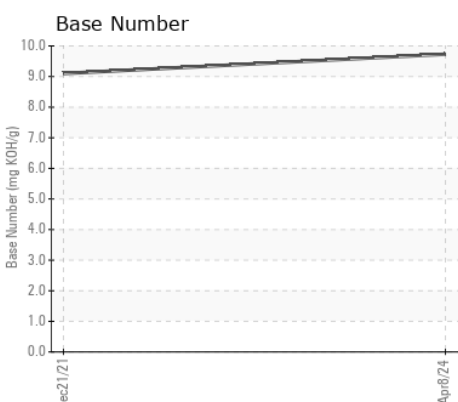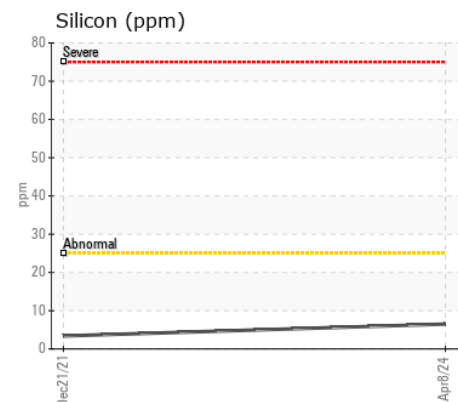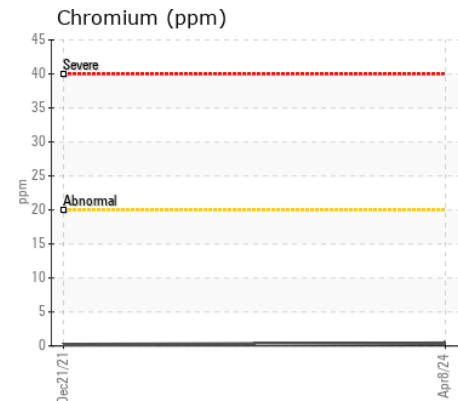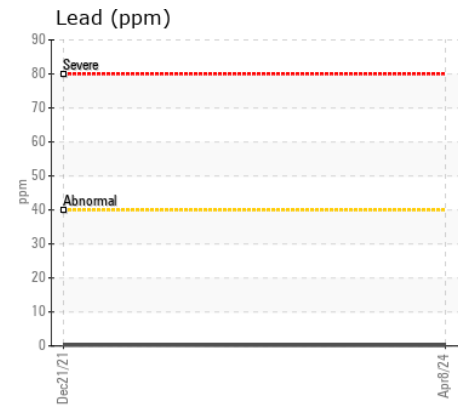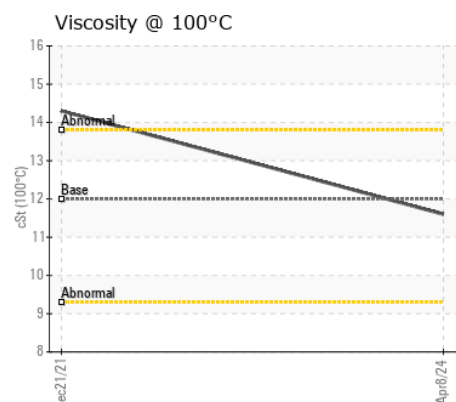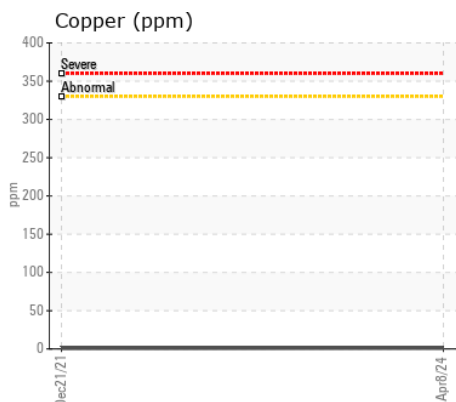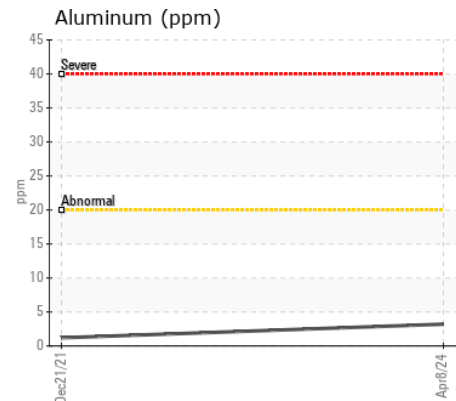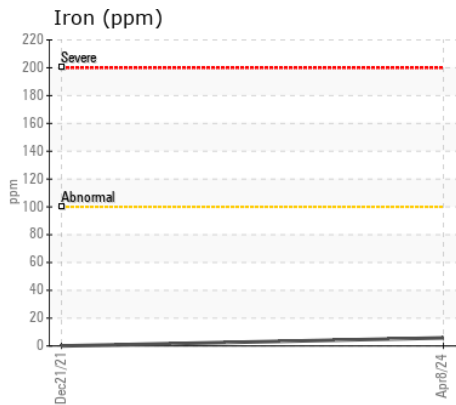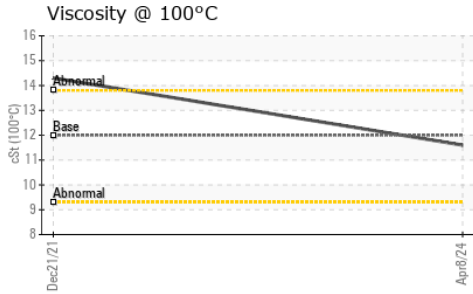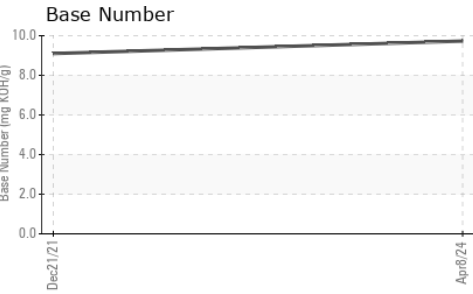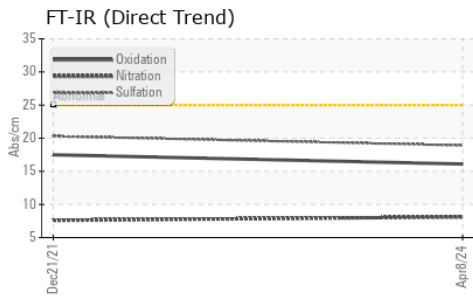

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0057340
Lab Number : 06177393
Unique Number : 11023446
Test Package : MOB 2

VALLEY PACIFIC PETROLEUM SERVICES
 152 FRANK WEST CIRCLE
 STOCKTON, CA
 US 95206

Received : 13 May 2024
Tested : 14 May 2024
Diagnosed : 14 May 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: MARCEY LIGHTFOOT
 marcey.lightfoot@vpps.net
 T: (209)461-3611
 F: (209)888-6196