



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 350G 1FF350GXPMF815413**  
 Component  
**Swing Drive Gear Case**  
 Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0210424</b>	JR0195360	JR0169983
Sample Date		Client Info		<b>06 May 2024</b>	22 Dec 2023	16 Aug 2023
Machine Age	hrs	Client Info		<b>3007</b>	2508	1973
Oil Age	hrs	Client Info		<b>1973</b>	0	0
Filter Age	hrs	Client Info		<b>1973</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>51</b>	45	42
Iron	ppm	ASTM D5185m	>200	<b>59</b>	37	50
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>2</b>	2	0
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m		<b>1</b>	0	0
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>4</b>	2	5
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	0
Boron	ppm	ASTM D5185m		<b>36</b>	37	173
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>6</b>	4	2
Calcium	ppm	ASTM D5185m		<b>82</b>	24	4
Phosphorus	ppm	ASTM D5185m		<b>1193</b>	1029	816
Zinc	ppm	ASTM D5185m		<b>33</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>25344</b>	25016	20396
Visc @ 40°C	cSt	ASTM D445		<b>142</b>	142	150

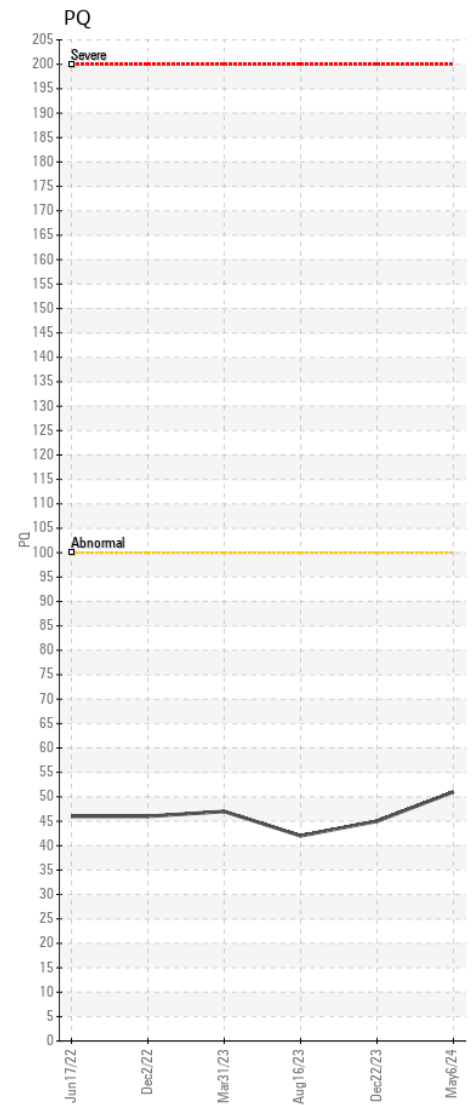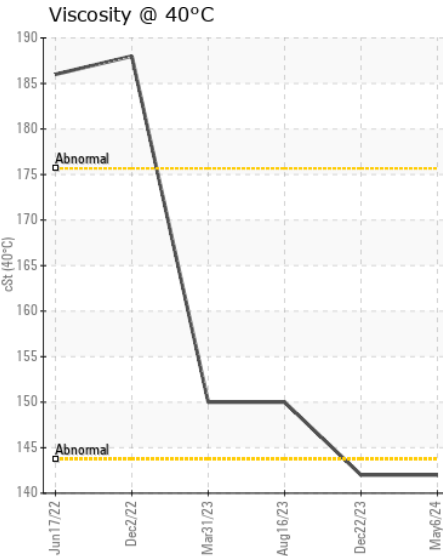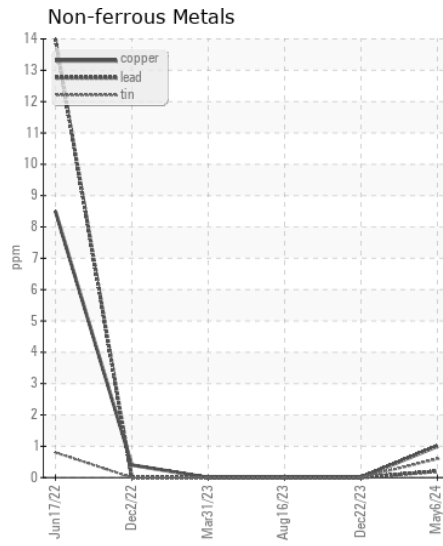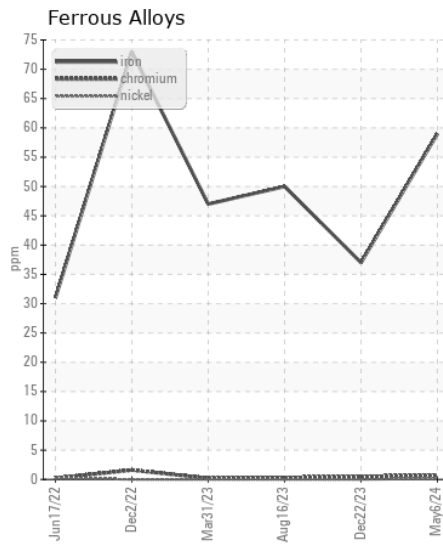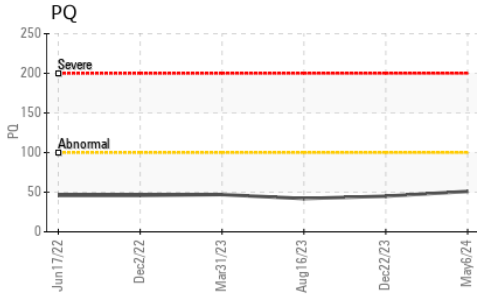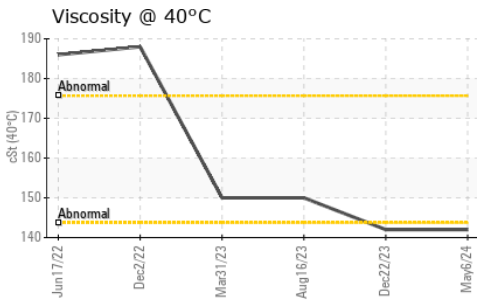

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0210424 **Received** : 13 May 2024  
**Lab Number** : 06177417 **Tested** : 14 May 2024  
**Unique Number** : 11023470 **Diagnosed** : 14 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - STEPHENSON**  
 245 YARDMASTER COURT  
 STEPHENSON, VA  
 US 22656-1761  
 Contact: PHIL DAUGHERTY  
 pdaugherty@jamesriverequipment.com  
 T: x:  
 F: (540)693-2588