



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SW0071894]
 Machine Id
VOLVO A30G 753219
 Component
Bogie/Center Axle
 Fluid
COWIN 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP441718	VCP434668	VCP412719
Sample Date		Client Info		09 May 2024	23 Jan 2024	13 Sep 2023
Machine Age	hrs	Client Info		2028	1500	1000
Oil Age	hrs	Client Info		0	1500	1000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	206	328	209
Chromium	ppm	ASTM D5185m	>20	4	5	4
Nickel	ppm	ASTM D5185m	>10	2	3	2
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	0	<1
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	36	35	24
Tin	ppm	ASTM D5185m	>20	2	2	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	3	4
Potassium	ppm	ASTM D5185m	>20	2	3	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	1
Boron	ppm	ASTM D5185m		216	242	209
Barium	ppm	ASTM D5185m		4	7	6
Molybdenum	ppm	ASTM D5185m		4	5	3
Manganese	ppm	ASTM D5185m		8	10	7
Magnesium	ppm	ASTM D5185m		3	2	5
Calcium	ppm	ASTM D5185m		820	847	822
Phosphorus	ppm	ASTM D5185m		1251	1422	1286
Zinc	ppm	ASTM D5185m		349	376	361
Sulfur	ppm	ASTM D5185m		21055	18901	17994
Visc @ 40°C	cSt	ASTM D445		85.1	88.0	87.5

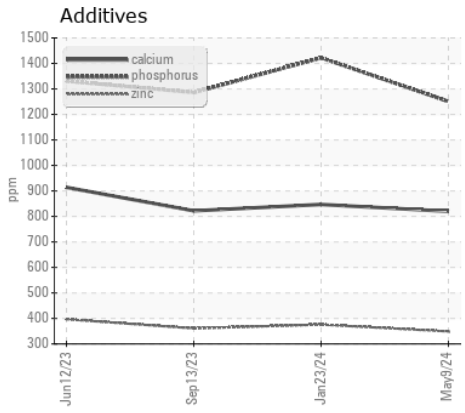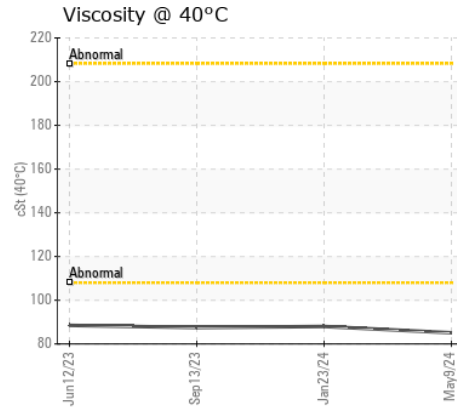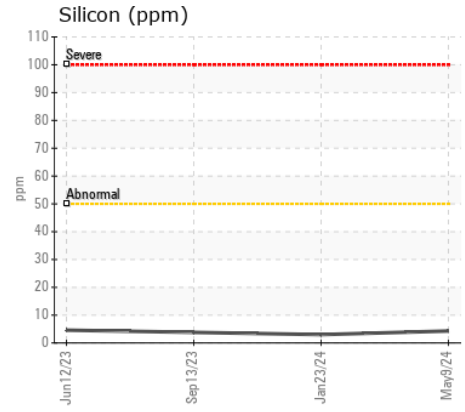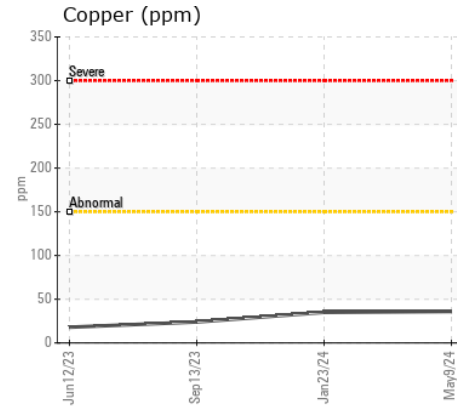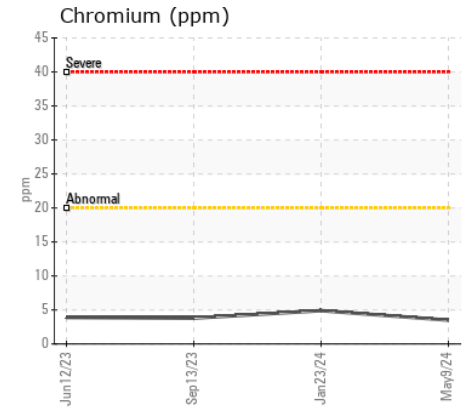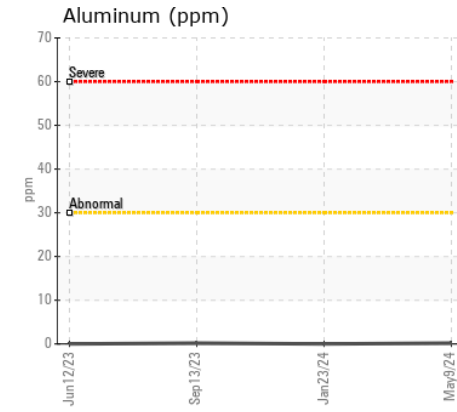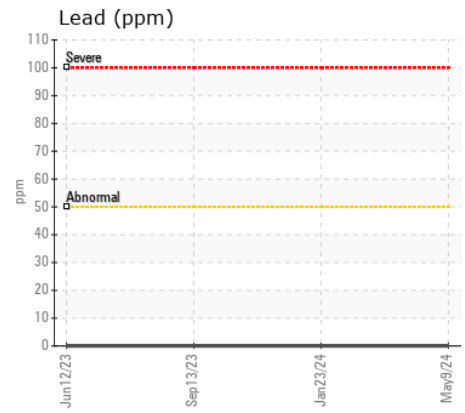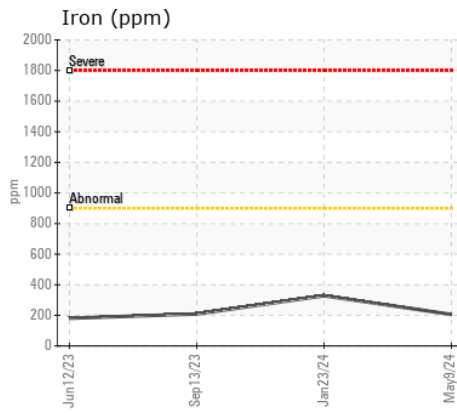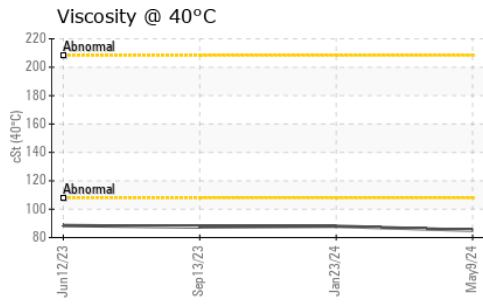

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP441718
 Lab Number : 06177524
 Unique Number : 11023577
 Test Package : MOB 1

Received : 13 May 2024
 Tested : 14 May 2024
 Diagnosed : 14 May 2024 - Wes Davis

SANTA ROSA COUNTY LANDFILLS
 6337 DA LISA RD
 MILTON, FL
 US 32583

Contact: ROLAND MCKINNON
 rolandm@santarosa.fl.gov

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (850)777-0573

F: