



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL



Area
OKLAHOMA/102/EG - BACKHOE LOADER
Machine Id
53.513L [OKLAHOMA^102^EG - BACKHOE LOADER]
Component
Front Left Final Drive
Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 5634 hours)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0864418	WC0603261	WCCF1209
Sample Date		Client Info		03 May 2024	17 Feb 2023	11 Jan 2019
Machine Age	hrs	Client Info		5634	5700	2224
Oil Age	hrs	Client Info		5634	5700	1341
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				MARGINAL	ABNORMAL	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	79	151	204
Chromium	ppm	ASTM D5185m	>10	<1	2	3
Nickel	ppm	ASTM D5185m	>5	0	<1	2
Titanium	ppm	ASTM D5185m	>15	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>75	3	2	2
Lead	ppm	ASTM D5185m	>10	5	15	▲ 135
Copper	ppm	ASTM D5185m	>75	56	▲ 190	▲ 1746
Tin	ppm	ASTM D5185m	>8	7	▲ 21	▲ 182
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	▲ VHEVY

CONTAMINATION






There is a light concentration of water present in the oil.

Silicon	ppm	ASTM D5185m	>400	18	13	14
Potassium	ppm	ASTM D5185m	>20	0	2	6
Water	%	ASTM D6304	>0.2	▲ 0.265	---	---
ppm Water	ppm	ASTM D6304	>2000	▲ 2650	---	---
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	▲ 0.2%	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	3	6
Boron	ppm	ASTM D5185m		20	34	22
Barium	ppm	ASTM D5185m		0	2	6
Molybdenum	ppm	ASTM D5185m		<1	2	5
Manganese	ppm	ASTM D5185m		2	2	3
Magnesium	ppm	ASTM D5185m		16	17	15
Calcium	ppm	ASTM D5185m		3183	2905	2807
Phosphorus	ppm	ASTM D5185m		998	939	882
Zinc	ppm	ASTM D5185m		1234	1194	1014
Sulfur	ppm	ASTM D5185m		5385	5634	5877
Visc @ 40°C	cSt	ASTM D445	57.6	89.3	88.0	84.23

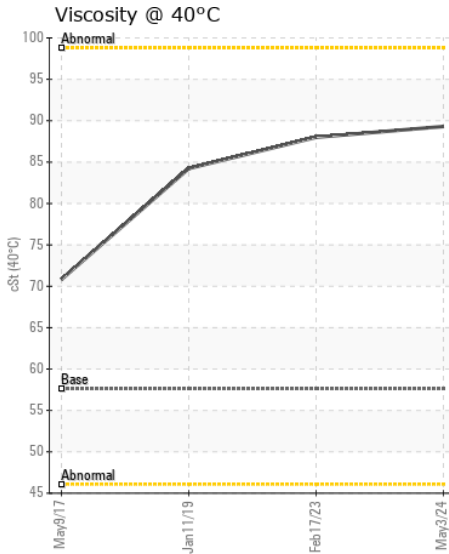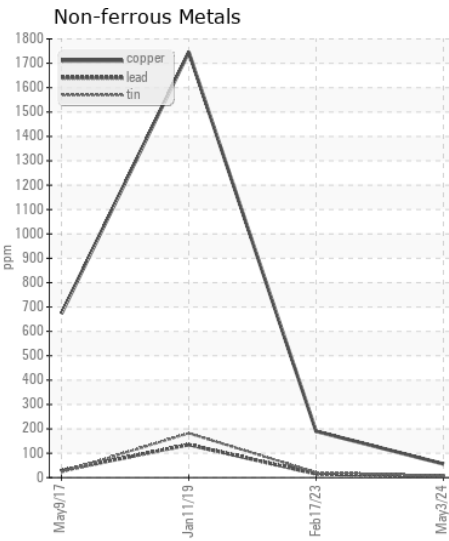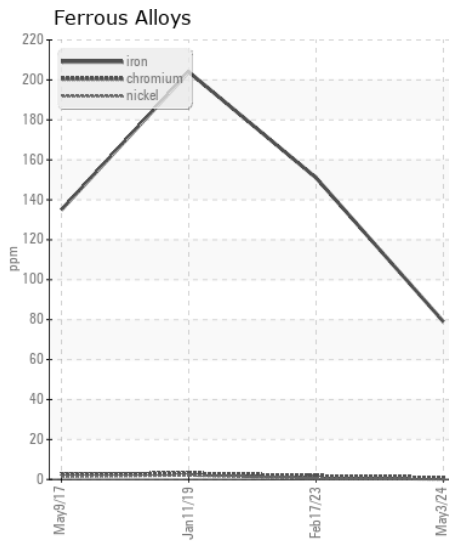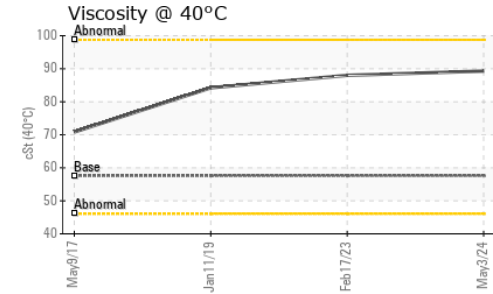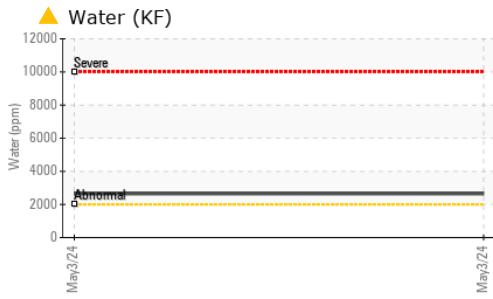

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0864418 **Received** : 13 May 2024
Lab Number : 06177533 **Tested** : 15 May 2024
Unique Number : 11023586 **Diagnosed** : 15 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: KF)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)