



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
40401
 Component
Center Right Planetary
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0846454	WC0733626	WC0342296
Sample Date		Client Info		02 May 2024	09 Nov 2022	14 Jun 2019
Machine Age	hrs	Client Info		12011	9580	6310
Oil Age	hrs	Client Info		1500	1000	0
Filter Age	hrs	Client Info		1500	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	62	56	34
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	2
Silver	ppm	ASTM D5185m		0	1	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	<1
Lead	ppm	ASTM D5185m	>25	34	31	32
Copper	ppm	ASTM D5185m	>75	8	8	7
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	5	8
Potassium	ppm	ASTM D5185m	>20	0	2	6
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	0.2%

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	4
Boron	ppm	ASTM D5185m	6	45	48	86
Barium	ppm	ASTM D5185m	0	2	0	<1
Molybdenum	ppm	ASTM D5185m	0	0	<1	1
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m	145	61	61	17
Calcium	ppm	ASTM D5185m	3570	3082	3529	3630
Phosphorus	ppm	ASTM D5185m	1290	1087	1084	1082
Zinc	ppm	ASTM D5185m	1640	1225	1325	1386
Sulfur	ppm	ASTM D5185m		3800	4499	3094
Visc @ 40°C	cSt	ASTM D445	57.0	43.9	44.4	38.6

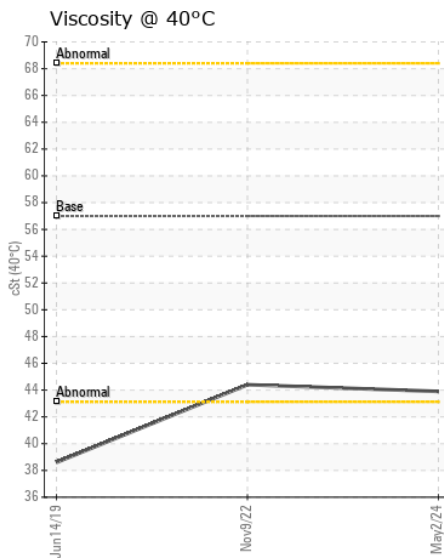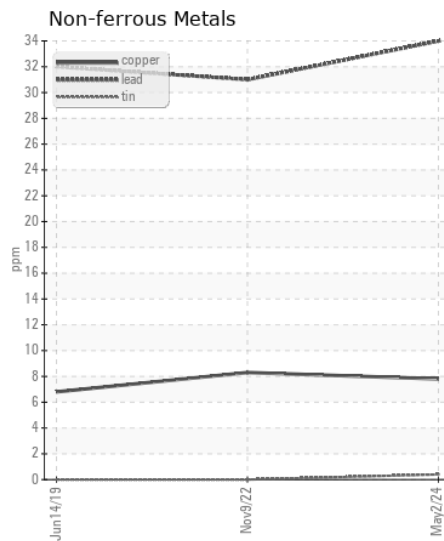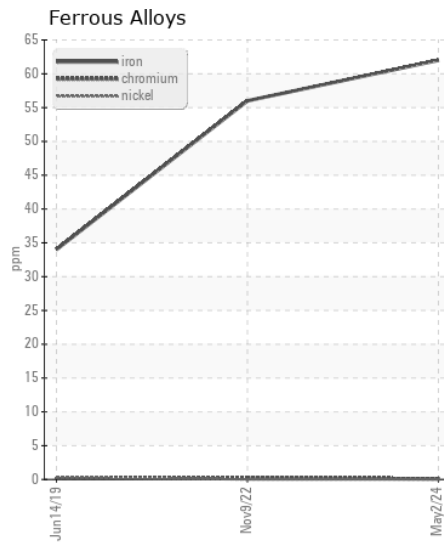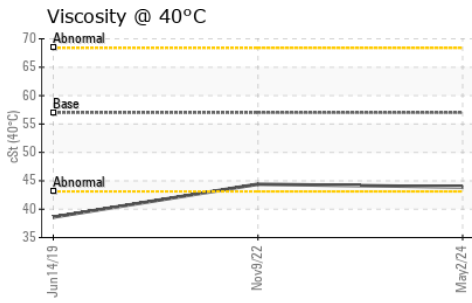

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0846454
Lab Number : 06177552
Unique Number : 11023605
Test Package : CONST
Received : 13 May 2024
Tested : 14 May 2024
Diagnosed : 15 May 2024 - Don Baldrige

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560

Contact: SCOTT SULLIVAN
 ssullivan@sullivan-eastern.com
 T: (919)484-8993
 F: (919)484-2136

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)