



ASCENDUM

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL

Area

Ascendum Machinery/500 Hour CSA

Machine Id

VOLVO EC350E 2162 (S/N 314241)

Component

Rear Left Final Drive

Fluid

VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- QTS)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

WEAR

Gear wear is indicated.

CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION









The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009940	VCP328832	---
Sample Date		Client Info		08 May 2024	12 Oct 2021	---
Machine Age	hrs	Client Info		4988	688	---
Oil Age	hrs	Client Info		4300	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		None	Changed	---
Sample Status				SEVERE	NORMAL	---

Iron	ppm	ASTM D5185m	>1200	▲ 1840	293	---
Chromium	ppm	ASTM D5185m	>10	▲ 22	8	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		17	1	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>100	● 210	13	---
Lead	ppm	ASTM D5185m	>10	0	<1	---
Copper	ppm	ASTM D5185m	>200	1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

Silicon	ppm	ASTM D5185m	>100	▲ 502	26	---
Potassium	ppm	ASTM D5185m	>20	10	1	---
Water	%	ASTM D6304	>0.2	0.118	---	---
ppm Water	ppm	ASTM D6304	>2000	1180	---	---
Silt	scalar	*Visual	NONE	NONE	VLITE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	0.2%	NEG	---

Sodium	ppm	ASTM D5185m		13	2	---
Boron	ppm	ASTM D5185m	111	181	5	---
Barium	ppm	ASTM D5185m	0.0	2	0	---
Molybdenum	ppm	ASTM D5185m	0.9	<1	<1	---
Manganese	ppm	ASTM D5185m	0.0	16	5	---
Magnesium	ppm	ASTM D5185m	39	16	2	---
Calcium	ppm	ASTM D5185m	93	35	7	---
Phosphorus	ppm	ASTM D5185m	920	1087	314	---
Zinc	ppm	ASTM D5185m	104	2	8	---
Sulfur	ppm	ASTM D5185m	20179	33194	13760	---
Visc @ 40°C	cSt	ASTM D445	333	308	172	---

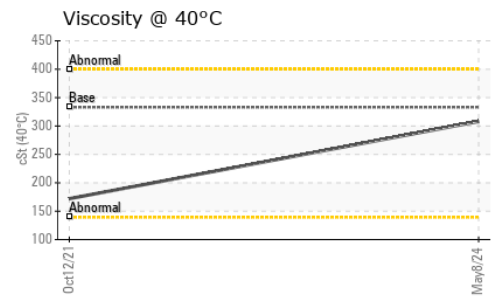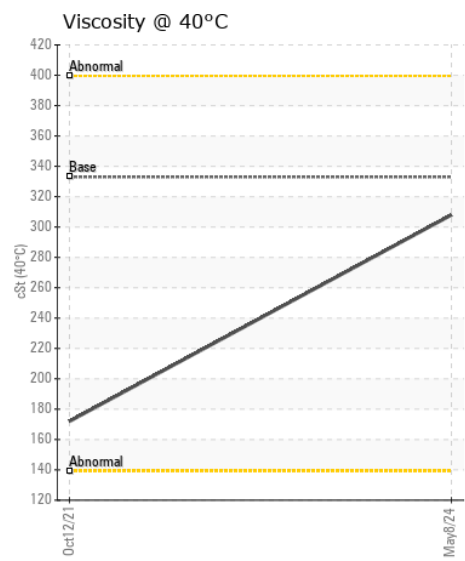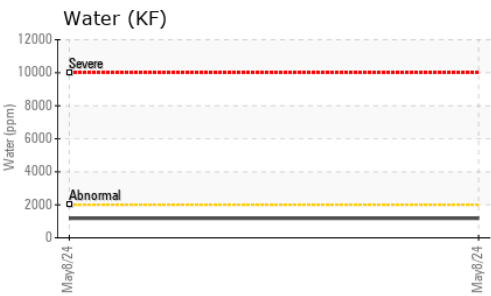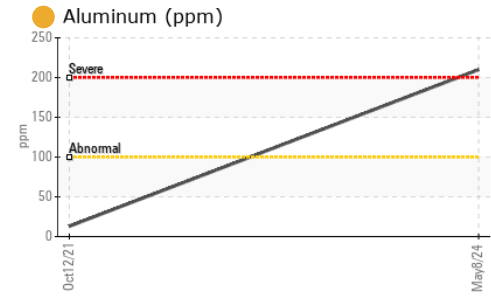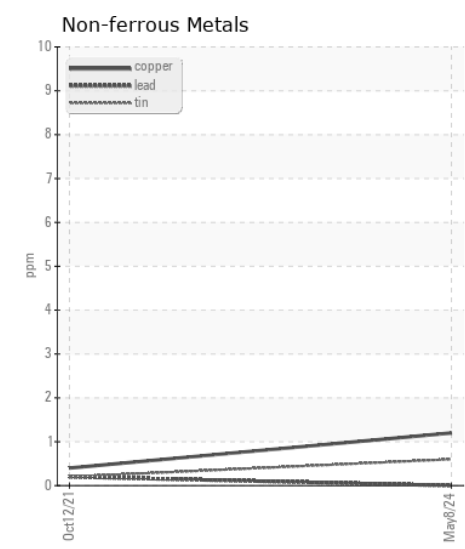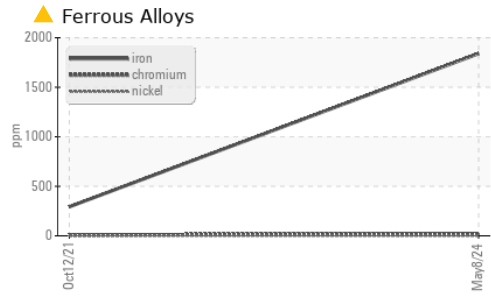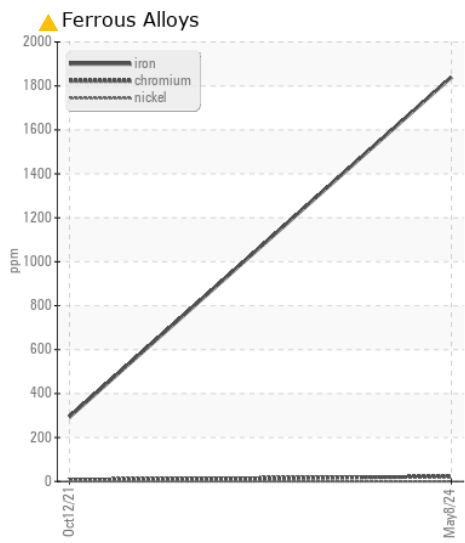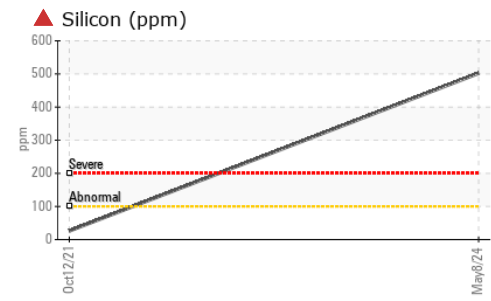

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009940 **Received** : 13 May 2024
Lab Number : 06177611 **Tested** : 15 May 2024
Unique Number : 11023664 **Diagnosed** : 15 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: KF)

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216
 Contact: ADAM CORBETT
 wacorbett@trianglegradingpaving.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (336)584-0145