



ASCENDUM

OIL ANALYSIS REPORT

WEAR **NORMAL**

CONTAMINATION **ABNORMAL**

FLUID CONDITION **NORMAL**



Area

Ascendum Machinery/500 Hour CSA

Machine Id

VOLVO A40G 2345 (S/N A40GV752039)

Component

Front Axle

Fluid

VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009990	ASC0007920	---
Sample Date		Client Info		07 May 2024	25 Jan 2024	---
Machine Age	hrs	Client Info		976	658	---
Oil Age	hrs	Client Info		976	658	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	None	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	110	140	---
Chromium	ppm	ASTM D5185m	>20	1	2	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	0	2	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	0	<1	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is a high amount of visible silt present in the sample.

Silicon	ppm	ASTM D5185m	>50	4	3	---
Potassium	ppm	ASTM D5185m	>20	1	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	HEAVY	MODER	---
Debris	scalar	*Visual	NONE	NONE	MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	---
Boron	ppm	ASTM D5185m		278	292	---
Barium	ppm	ASTM D5185m		3	2	---
Molybdenum	ppm	ASTM D5185m		<1	4	---
Manganese	ppm	ASTM D5185m		7	8	---
Magnesium	ppm	ASTM D5185m		1	2	---
Calcium	ppm	ASTM D5185m		196	168	---
Phosphorus	ppm	ASTM D5185m		2409	2183	---
Zinc	ppm	ASTM D5185m		86	70	---
Sulfur	ppm	ASTM D5185m		30615	26307	---
Visc @ 40°C	cSt	ASTM D445		52.6	52.5	---

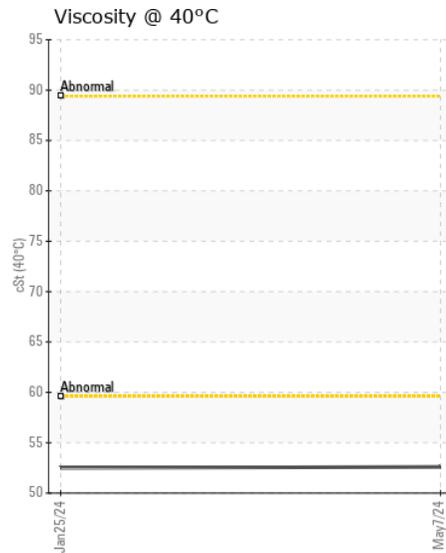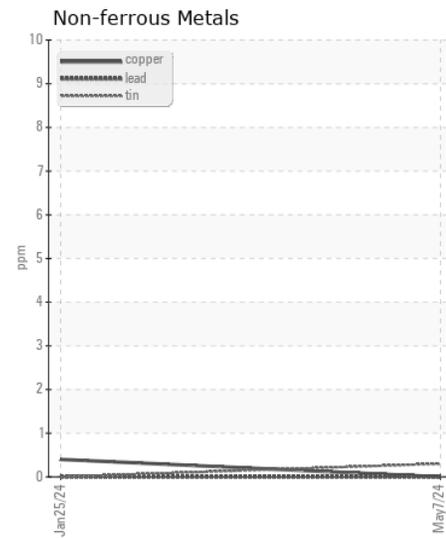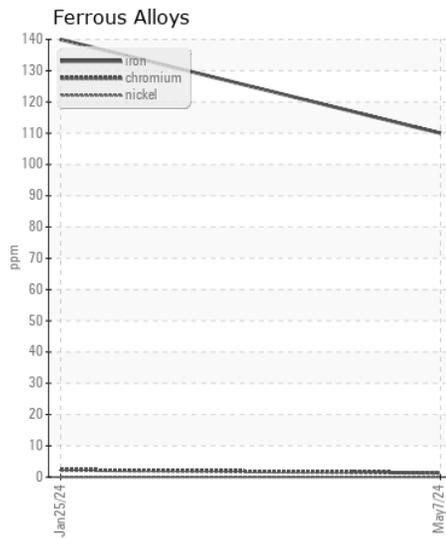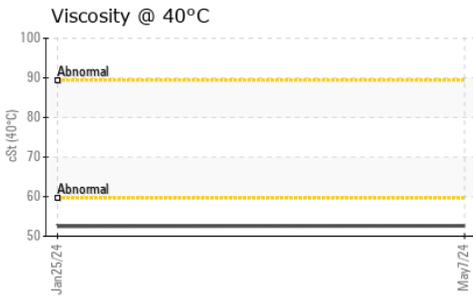

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009990
Lab Number : 06177616
Unique Number : 11023669
Test Package : CONST

Received : 13 May 2024
Tested : 14 May 2024
Diagnosed : 15 May 2024 - Don Baldrige

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216

Contact: KAREN HILLIARD
 khilliard@trianglegradingpaving.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)584-1745
 F: (336)584-0145