



ASCENDUM

OIL ANALYSIS REPORT



Area

Ascendum Machinery

Machine Id

VOLVO L180H 5319

Component

Transmission (Auto)

Fluid

VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0005274	ASC0007353	ASC0000692
Sample Date		Client Info		06 May 2024	15 Feb 2024	01 Dec 2023
Machine Age	hrs	Client Info		11005	10435	9988
Oil Age	hrs	Client Info		8632	8509	8545
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	100	82	76
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	2	<1	<1
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>225	3	2	3
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	3	2	4
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	0	2
Boron	ppm	ASTM D5185m	187	86	78	78
Barium	ppm	ASTM D5185m	0.0	1	0	0
Molybdenum	ppm	ASTM D5185m	0.0	0	0	<1
Manganese	ppm	ASTM D5185m	0.0	2	1	1
Magnesium	ppm	ASTM D5185m	6.8	1	2	0
Calcium	ppm	ASTM D5185m	215	72	66	54
Phosphorus	ppm	ASTM D5185m	445	194	181	165
Zinc	ppm	ASTM D5185m	56	14	<1	0
Sulfur	ppm	ASTM D5185m	1336	1963	1604	1495
Visc @ 40°C	cSt	ASTM D445	35.3	28.6	28.3	28.5

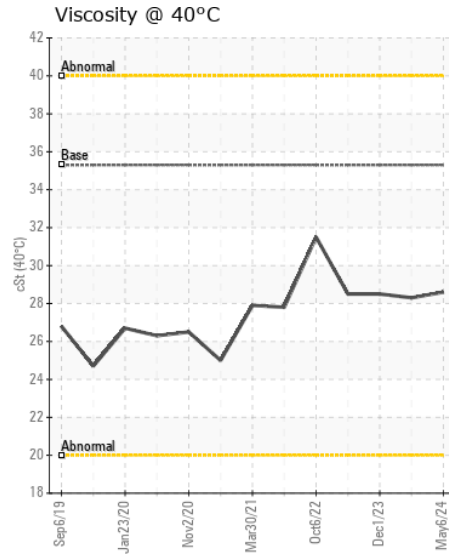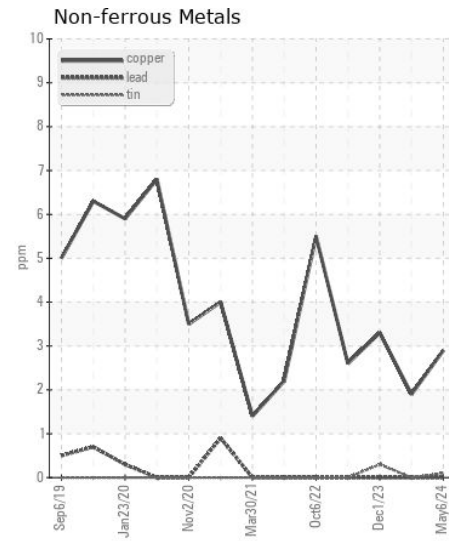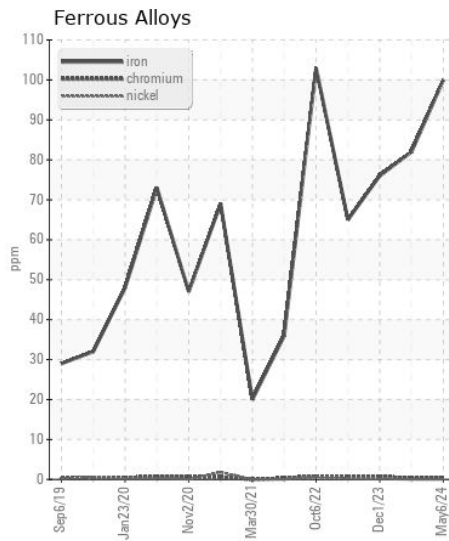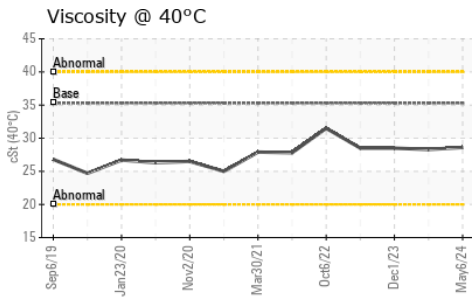

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0005274
Lab Number : 06177624
Unique Number : 11023677
Test Package : CONST
Received : 13 May 2024
Tested : 14 May 2024
Diagnosed : 15 May 2024 - Don Baldrige

METAL RECYCLING SERVICES - MONROE
 P.O. BOX 812
 MONROE, NC
 US 28111
 Contact: RYAN BOWDEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (704)238-0755