



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
26300
Component
Transmission (Manual)
Fluid
GEAR OIL SAE 80 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0857086	---	---
Sample Date		Client Info		03 May 2024	---	---
Machine Age	hrs	Client Info		8382	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>200	6	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>7	0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>45	<1	---	---
Copper	ppm	ASTM D5185m	>225	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>125	4	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	400	7	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	12	8	---	---
Calcium	ppm	ASTM D5185m	150	2559	---	---
Phosphorus	ppm	ASTM D5185m	1650	985	---	---
Zinc	ppm	ASTM D5185m	125	1182	---	---
Sulfur	ppm	ASTM D5185m	22500	8675	---	---
Visc @ 40°C	cSt	ASTM D445	74	52.7	---	---

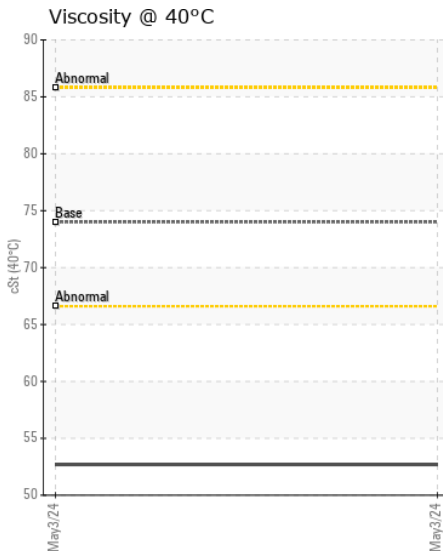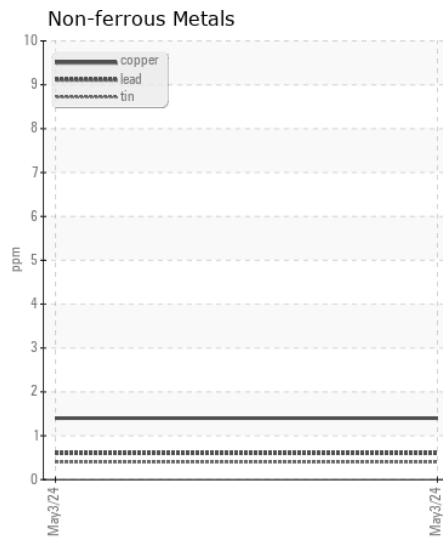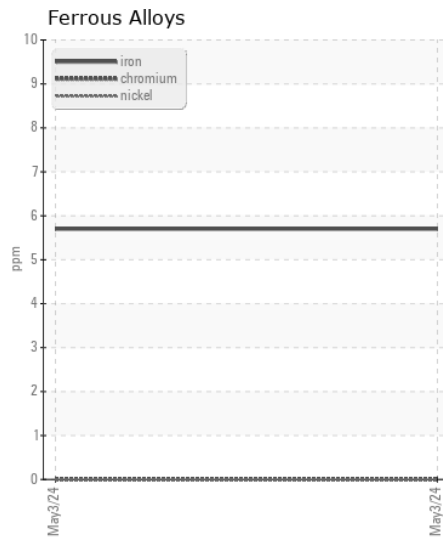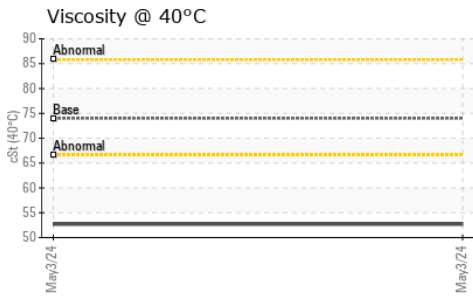

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0857086

Lab Number : 06177631

Unique Number : 11023684

Test Package : CONST

Received : 13 May 2024

Tested : 14 May 2024

Diagnosed : 15 May 2024 - Don Baldrige

SULLIVAN EASTERN INC

2860 C SLATER RD

MORRISVILLE, NC

US 27560

Contact: SCOTT SULLIVAN

ssullivan@sullivaneastern.com

T: (919)484-8993

F: (919)484-2136

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)