



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**NEIL N DIEHL**  
Machine Id  
[NEIL N DIEHL] 003 639030-3  
Component  
Starboard Main Engine  
Fluid  
CHEVRON DELO 710 LE (360 GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0068639</b>	MW06112298	MW0065833
Sample Date		Client Info		<b>01 Apr 2024</b>	01 Mar 2024	01 Feb 2024
Machine Age	hrs	Client Info		<b>61778</b>	61013	60367
Oil Age	hrs	Client Info		<b>61778</b>	61013	60367
Filter Age	hrs	Client Info		<b>134</b>	0	24
Oil Changed		Client Info		<b>Not Changd</b>	N/A	N/A
Filter Changed		Client Info		<b>Not Changd</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>19</b>	19	20
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>18	<b>5</b>	4	5
Copper	ppm	ASTM D5185m	>80	<b>35</b>	33	34
Tin	ppm	ASTM D5185m	>14	<b>7</b>	7	6
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>4</b>	5	7
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	3
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>2.9</b>	▲ 3.1	▲ 3
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.1</b>	10.0	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.9</b>	20.9	20.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>1</b>	1	0
Boron	ppm	ASTM D5185m		<b>40</b>	37	38
Barium	ppm	ASTM D5185m		<b>1</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>44</b>	43	45
Manganese	ppm	ASTM D5185m		<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>23</b>	13	10
Calcium	ppm	ASTM D5185m		<b>3482</b>	3275	3367
Phosphorus	ppm	ASTM D5185m		<b>16</b>	5	21
Zinc	ppm	ASTM D5185m	10	<b>11</b>	2	13
Sulfur	ppm	ASTM D5185m		<b>2767</b>	2217	2587
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>9.2</b>	8.9	8.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	<b>8.48</b>	9.15	9.13
Visc @ 100°C	cSt	ASTM D445	15.5	<b>15.3</b>	15.5	15.4


**FT-IR (Direct Trend)**

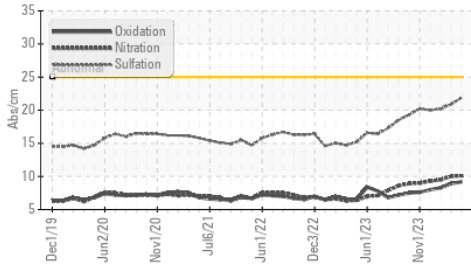


**Base Number**

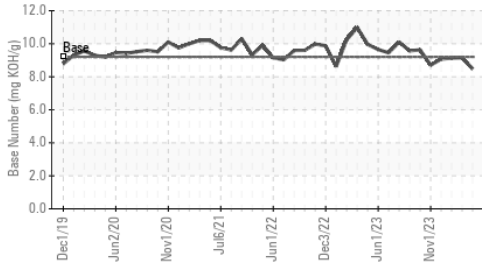


**Viscosity @ 100°C**

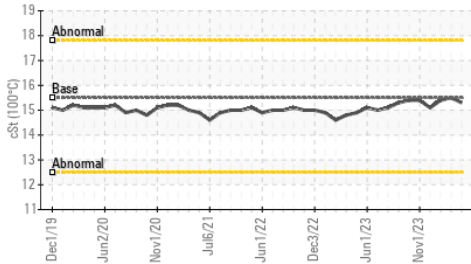


**Ferrous Alloys**

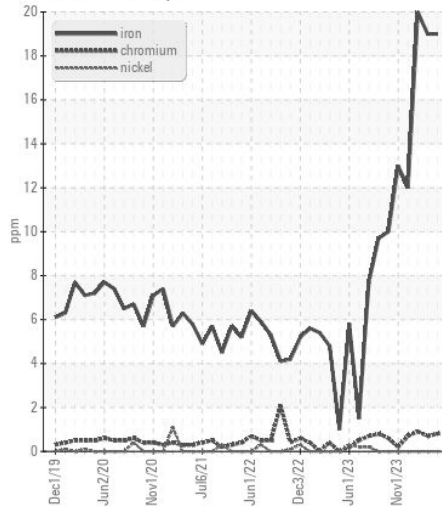


**Non-ferrous Metals**

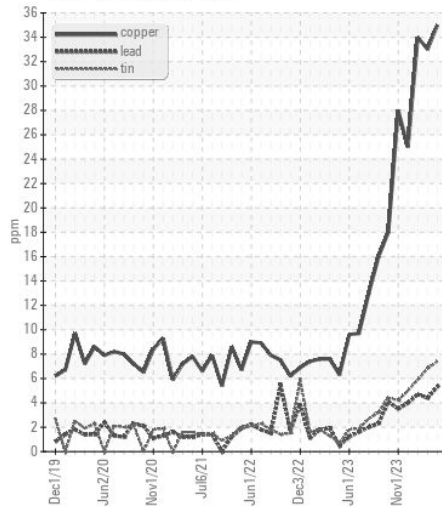

**Viscosity @ 100°C**

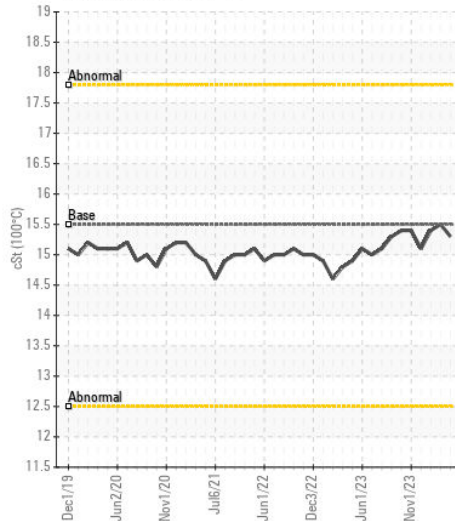

**Base Number**

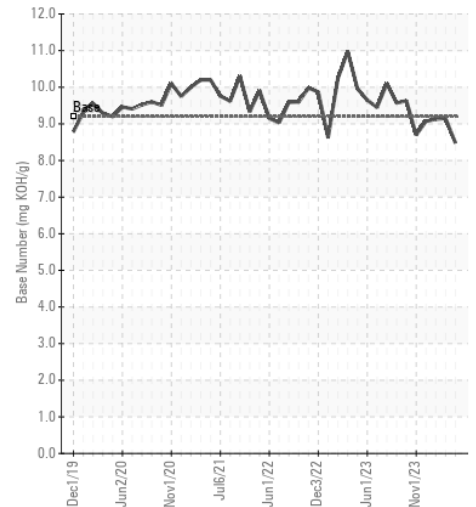

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0068639

**Lab Number** : 06177898

**Unique Number** : 11029224

**Test Package** : MAR 2

**Received** : 13 May 2024

**Tested** : 14 May 2024

**Diagnosed** : 14 May 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ALLEN WILLHELM

allen.willhelm@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)