



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / BCS - GRAVETTE [69691]
Machine Id
WL127
Component
Transmission (Manual)
Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm2)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108512	PCA0069866	PCA0086392
Sample Date		Client Info		01 May 2024	08 Dec 2023	30 Aug 2023
Machine Age	hrs	Client Info		33781	33270	32702
Oil Age	hrs	Client Info		33213	568	32702
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Cleaned	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<1	3	6
Chromium	ppm	ASTM D5185m	>5	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	1	0
Lead	ppm	ASTM D5185m	>45	0	0	<1
Copper	ppm	ASTM D5185m	>225	2	4	8
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>125	4	3	3
Potassium	ppm	ASTM D5185m	>20	0	2	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	0	3
Boron	ppm	ASTM D5185m	2	3	3	4
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	3	6
Manganese	ppm	ASTM D5185m	9	<1	0	<1
Magnesium	ppm	ASTM D5185m	1	25	36	92
Calcium	ppm	ASTM D5185m	3131	3052	3025	2660
Phosphorus	ppm	ASTM D5185m	1194	986	1024	970
Zinc	ppm	ASTM D5185m	1281	1136	1168	1186
Sulfur	ppm	ASTM D5185m	3811	4489	4970	4631
Visc @ 40°C	cSt	ASTM D445	88.5	85.7	86.6	87.3

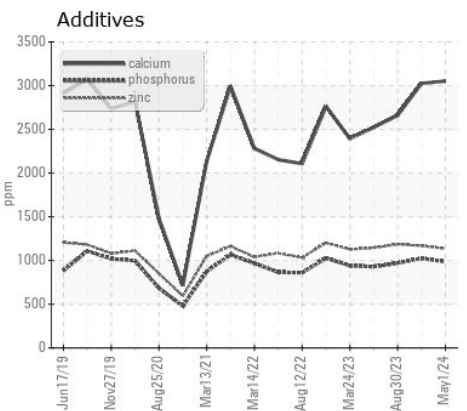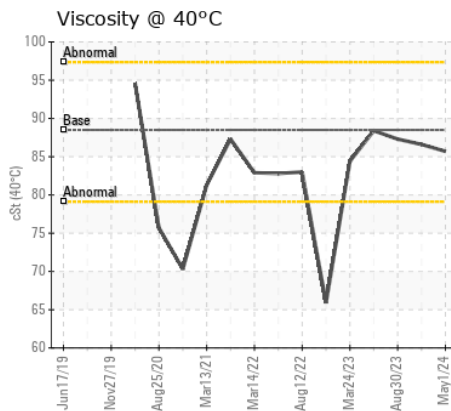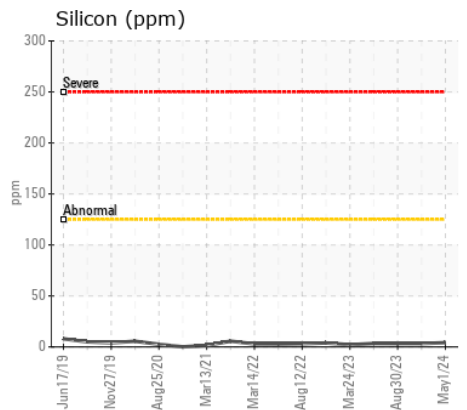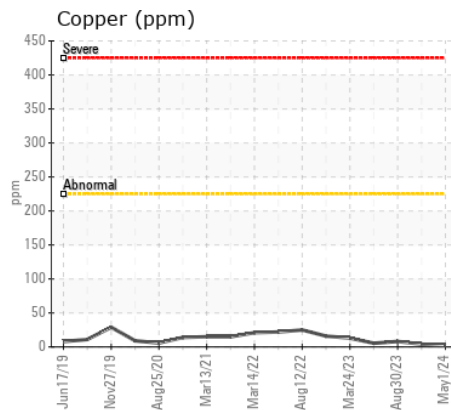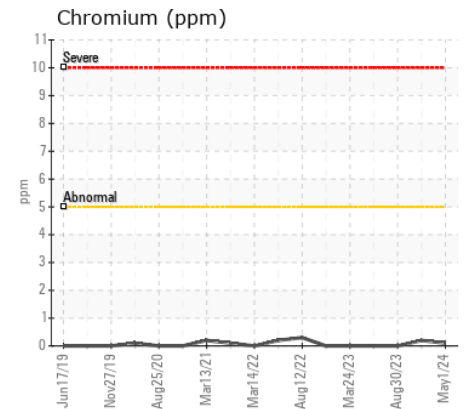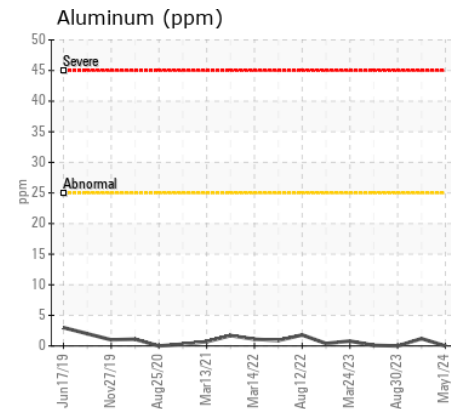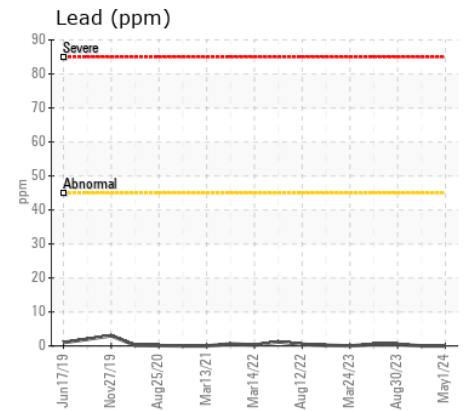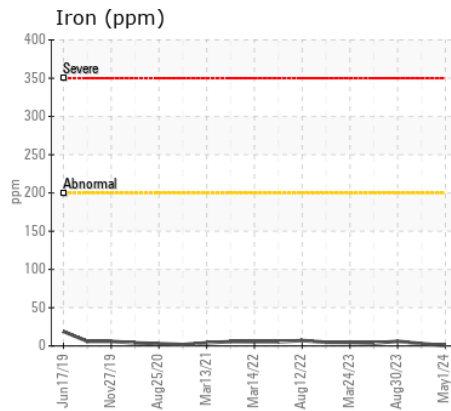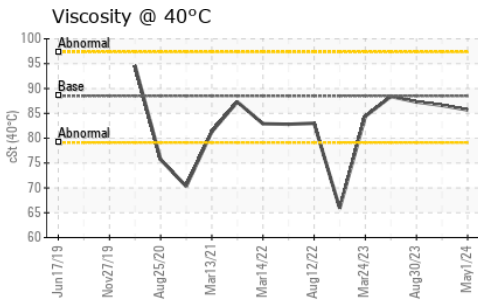

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108512
Lab Number : 06177988
Unique Number : 11029314
Test Package : MOB 1

Received : 13 May 2024
Tested : 14 May 2024
Diagnosed : 15 May 2024 - Sean Felton

Kemp Quarries - Benton County Stone - Gravette
 15100 N Hwy 59
 Sulphur Springs, AR
 US 72768

Contact: gravette@bentoncountystone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: