



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
BARTO
Machine Id
7074 [BARTO]
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		SBP0007218	SBP0005061	SBP0004407
Sample Date		Client Info		06 May 2024	26 Jan 2024	05 Jun 2023
Machine Age	mls	Client Info		324052	286870	245009
Oil Age	mls	Client Info		37182	41861	37619
Filter Age	mls	Client Info		37182	41861	37619
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	22	19	16
Chromium	ppm	ASTM D5185m	>5	2	2	1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	7	8	6
Lead	ppm	ASTM D5185m	>30	<1	0	0
Copper	ppm	ASTM D5185m	>150	10	12	16
Tin	ppm	ASTM D5185m	>5	1	2	1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	5	4	4
Potassium	ppm	ASTM D5185m	>20	8	6	7
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.7	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.8	9.1	8.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	21.7	21.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	3	<1
Boron	ppm	ASTM D5185m	0	0	0	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	64	62	59
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	964	1001	844
Calcium	ppm	ASTM D5185m	1070	1105	1129	1241
Phosphorus	ppm	ASTM D5185m	1150	986	1018	961
Zinc	ppm	ASTM D5185m	1270	1264	1310	1238
Sulfur	ppm	ASTM D5185m	2060	3003	2587	2825
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	18.5	16.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.7	6.4	7.5
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	14.1	13.8


FT-IR (Direct Trend)

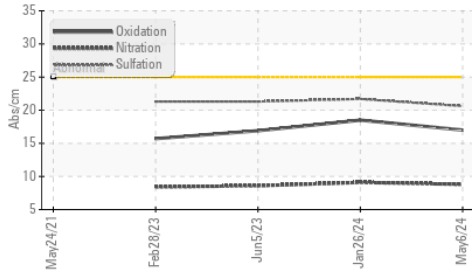


Ferrous Alloys

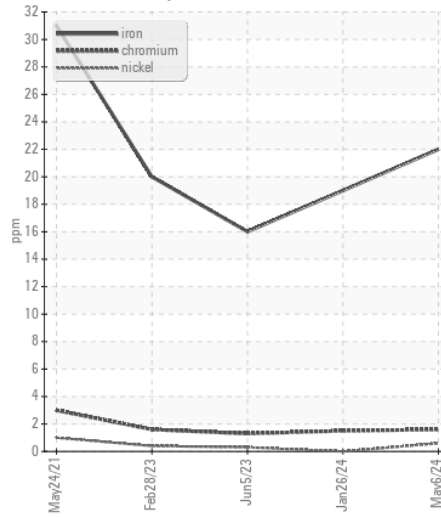


Base Number

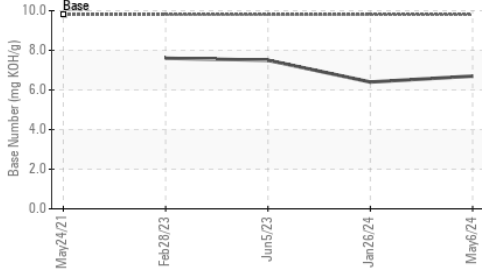


Viscosity @ 100°C

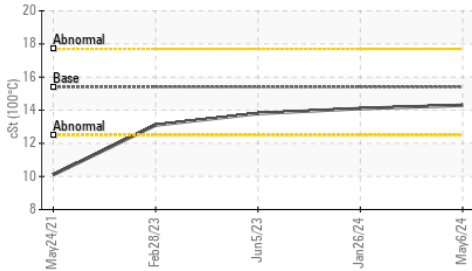


Non-ferrous Metals

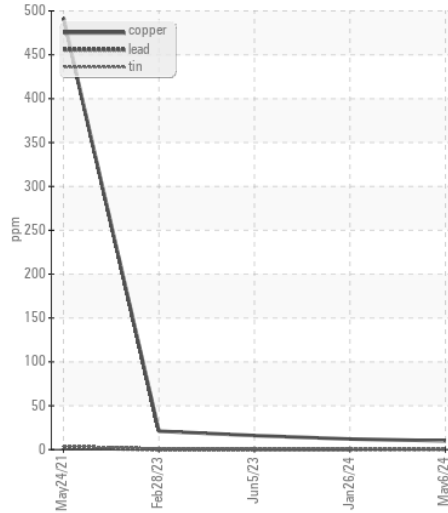

Viscosity @ 100°C

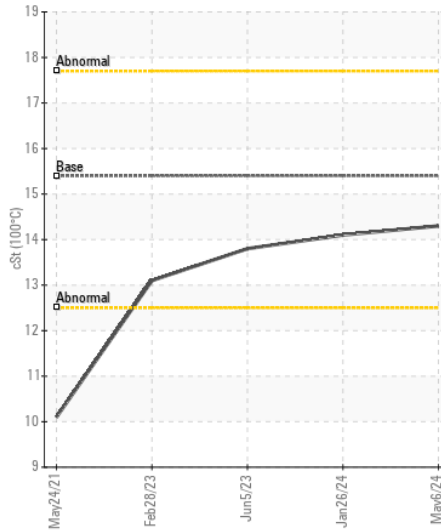

Base Number

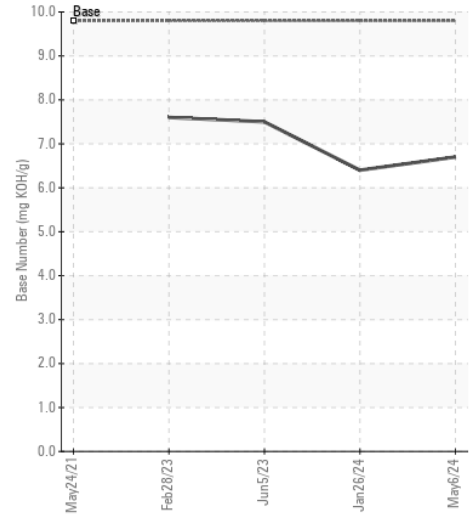

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : SBP0007218
 Lab Number : 06178131
 Unique Number : 11029457
 Test Package : FLEET

Received : 13 May 2024
 Tested : 14 May 2024
 Diagnosed : 14 May 2024 - Wes Davis

SCHMIDT TRANSPORTATION - BARTO
 108 E Bay Road
 Plattsmouth, NE
 US 68048
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: