



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**520014-7033**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0091878</b>	GFL0112790	GFL0045479
Sample Date		Client Info		<b>07 May 2024</b>	29 Feb 2024	06 Dec 2023
Machine Age	hrs	Client Info		<b>11426</b>	10920	10299
Oil Age	hrs	Client Info		<b>11426</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Filter Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>6</b>	15	35
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	10	8
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	8
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	0	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.7</b>	9.5	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.2</b>	19.9	21.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	2
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	11
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	60	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>907</b>	952	952
Calcium	ppm	ASTM D5185m	1070	<b>1061</b>	1052	1049
Phosphorus	ppm	ASTM D5185m	1150	<b>989</b>	1014	967
Zinc	ppm	ASTM D5185m	1270	<b>1204</b>	1245	1242
Sulfur	ppm	ASTM D5185m	2060	<b>3390</b>	2740	3035
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.9</b>	16.3	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.8</b>	6.1	6.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	13.8	13.8


**FT-IR (Direct Trend)**

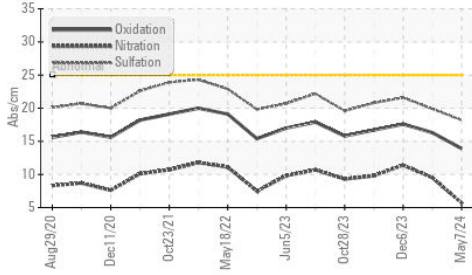


**Ferrous Alloys**

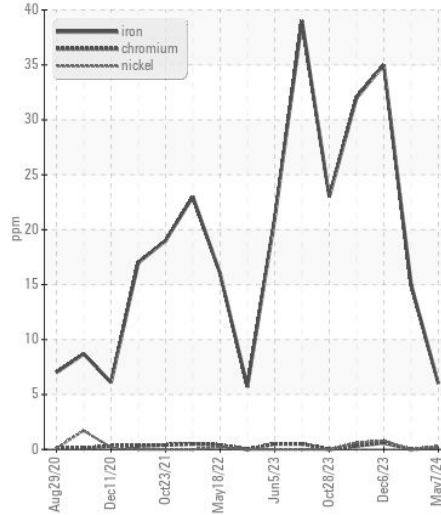


**Base Number**

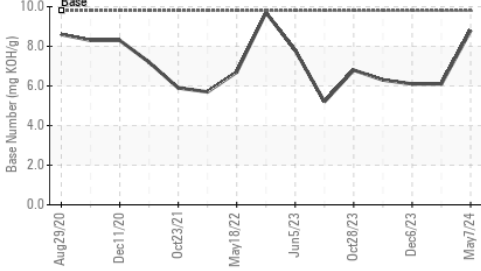


**Non-ferrous Metals**

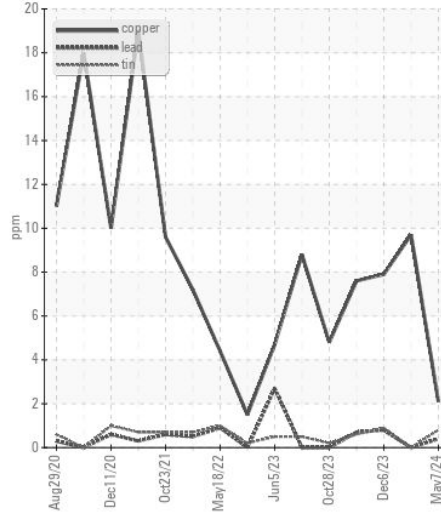


**Viscosity @ 100°C**

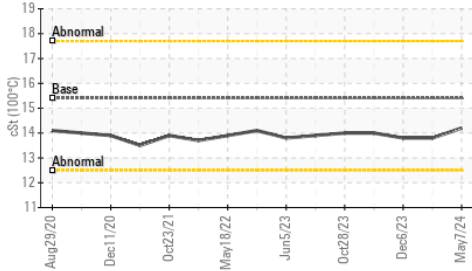

**Viscosity @ 100°C**

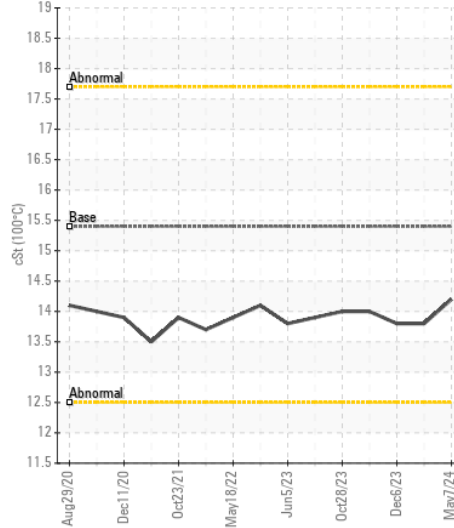

**Base Number**

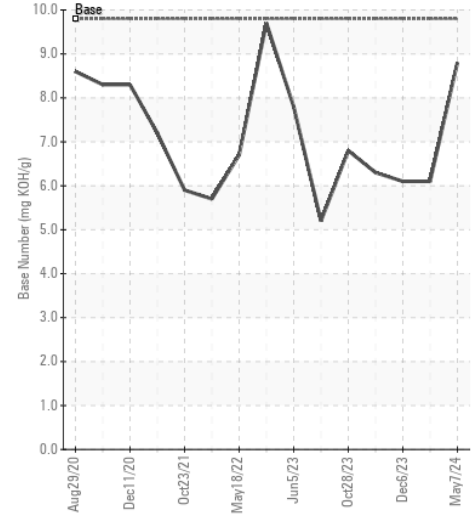

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091878  
**Lab Number** : 06178178  
**Unique Number** : 11029504  
**Test Package** : FLEET

**Received** : 13 May 2024  
**Tested** : 14 May 2024  
**Diagnosed** : 14 May 2024 - Wes Davis

**GFL Environmental - 654 - Richmond Hauling**  
 11800 Lewis Road  
 Chester, VA  
 US 23831  
 Contact: Jimmy Mayes  
 jmayes@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: